

# Antenna - RAD-900-ANT-OMNI-2-2-RSMA - 2904801

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Omnidirectional antenna, 900 MHz, gain: 2 dBi, polarization: linear, degree of protection: IP65, connection: RSMA (male), incl. 1.8 m / 6 ft. connecting cable and mounting bracket for wall mounting

## Your advantages

- For freely mobile applications
- For multipoint or mesh connections

## Key Commercial Data

Packing unit	1 pc
GTIN	 4 046356 902113
GTIN	4046356902113

## Technical data

### Dimensions

Width	0.3 cm
Height	8.9 cm

### Ambient conditions

Degree of protection	IP65
Ambient temperature (operation)	-40 °C ... 75 °C

### General

With connecting cable	yes
Frequency range	900 MHz
	900 MHz
Horizontal beamwidth	360 °
Vertical beamwidth	N/A
Polarization	Linear vertical
Impedance	50 Ω

## Antenna - RAD-900-ANT-OMNI-2-2-RSMA - 2904801

### Technical data

#### General

Gain	2.15 dBi
Connection method	RSMA (male)
Material	V2A (Antenna housing)
	V2A (Bracket)
Mounting type	Wall mounting


#### Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

### Drawings

## Antenna - RAD-900-ANT-OMNI-2-2-RSMA - 2904801

Schematic diagram

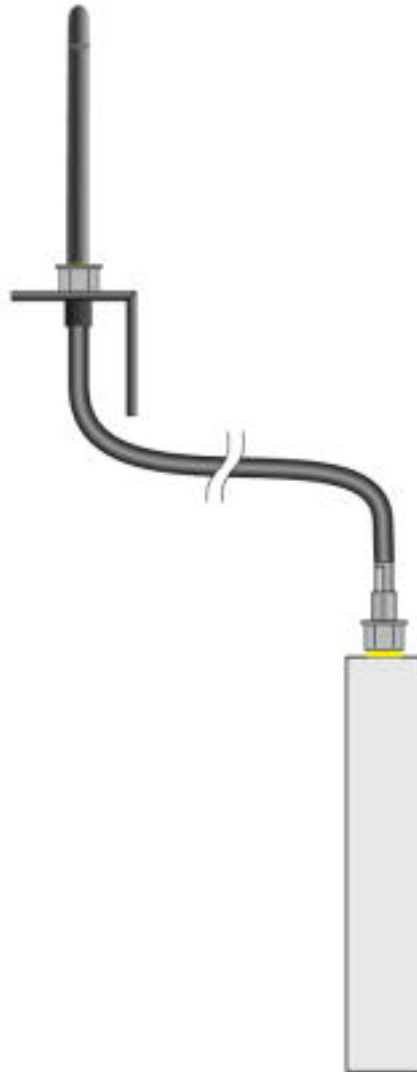

Installation example

## Antenna - RAD-900-ANT-OMNI-2-2-RSMA - 2904801

Schematic diagram

