
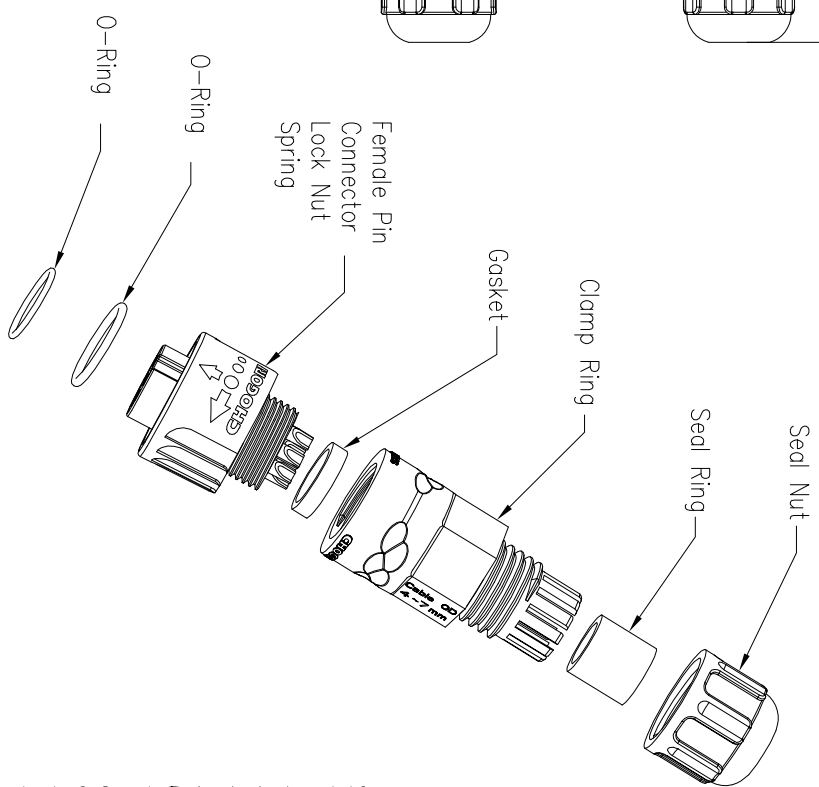
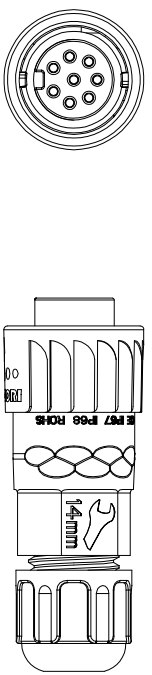


REV.	EN. NO.	DESCRIPTION	SIGN	DATE
C1	N/A	INITIAL DRAWING	Liu	2019/08/13

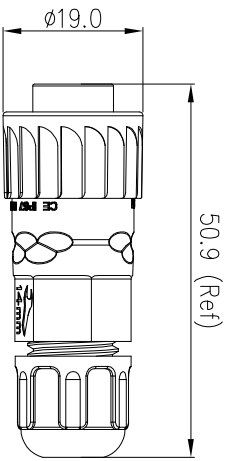

- Specification:
1. Operation Temperature: -45°C~105°C.
  2. Insulation Resistance: 100MΩ at DC500V.
  3. Contact Resistance: <10mΩ
  4. Withstand Voltage: 1500V AC
  5. Operating Current: 5A
  6. Operating Voltage: AC 60V
  7. Waterproof Rate: IP67 (Mated)
  8. Seal Nut: Nylon, Black
  9. Seal Ring: Silicon, Black
  10. Clamp Ring: Nylon, Black
  11. Gasket: Silicon, Red
  12. Female Pin: Copper Alloy, Gold Plated
  13. Connector: Nylon+GF, Black
  14. Lock Nut: Nylon, Orange
  15. Spring: SUS
  16. O-Ring: Silicon, Red
  17. RoHS Compliant.
  18. Cable Range OD: φ3.5mm~φ6.8mm
  19. Mating Cap: 804-00009-00

22XXX231-01		Pin Number	
5 Pin	6 Pin	8 Pin	
P/N: 22005231-01	P/N: 22006231-01	P/N: 22008231-01	
Pin Assignments Front View			

UNIT: mm	DESCRIPTION	PART NO	DRAWN BY	DATE
TOLERANCE X ±0.25 XX ±0.15 XXX ±0.05 ANGLES ±1°	Standard Series Push Lock Male Plug With Female Pin	22XXX231-01	Liu	2019/08/13
SCALE: 1:1	SHEET: 1 OF 1	DWG NO	CHECKED BY	DATE
REV: C1	SIZE: A4	CUSTOMER	APPROVED BY	DATE
* : Inspection Item			Pamson	2019/08/13

**CHOGORI**