



MATERIAL AND FINISH:
 Insulator: PC (Polycarbonate), color black,
 UL-94V-0 rated
 Contacts: Brass, Nickel plated


ELECTRICAL SPECIFICATIONS:
 Current rating: 6.3A WITH FUSE 1.6W 
 Voltage rating: 250 VAC
 Dielectric withstanding voltage: 3000 VAC for
 one minute

ORDERING CODE:
 42R44-31-__-__-__
 1 2 3



- 1) **TERMINAL OPTIONS**
 1 = .187(4.8) WITH Ø1.4
 2 = .250(6.3) WITH Ø1.65

- 2) **ELECTRICAL CIRCUIT CONFIGURATION**


1 = 10A 250V 70°C
 2+GROUND 2 FUSE 

2 = 10A 250V 120°C
 2+GROUND 2 FUSE 



- 3) **PANEL THICKNESS**

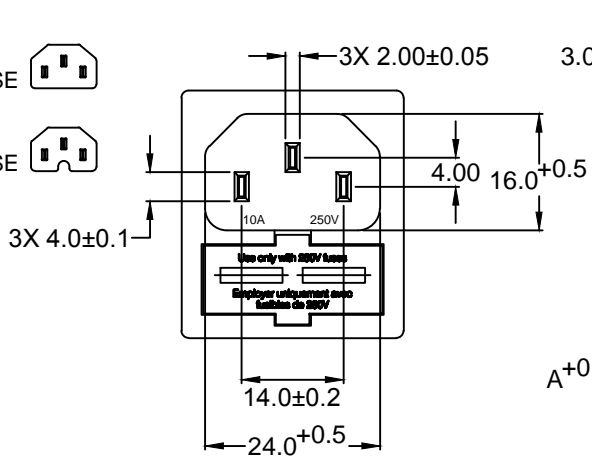

CIRCUIT

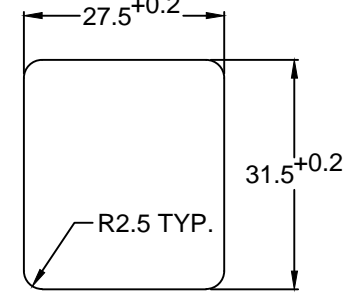

RECOMMENDED
 PANEL CUTOUT

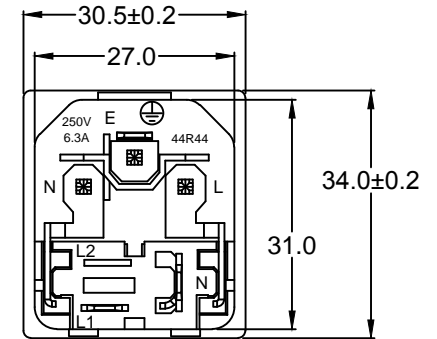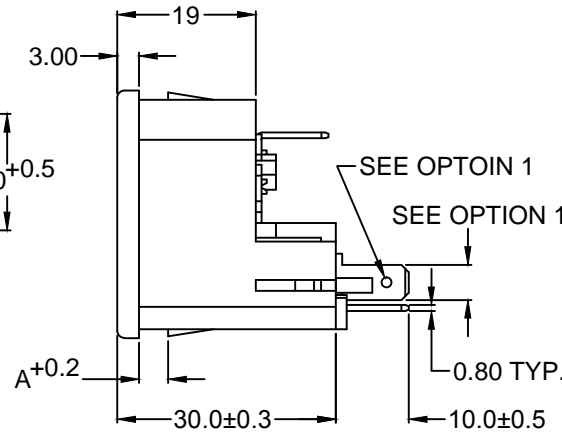

RoHS
 COMPLIANT

TOLERANCE UNLESS OTHERWISE SPECIFIED

X	±	1
X.X	±	0.4
X.XX	±	0.20

Power Dynamics, Inc.
 Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: IEC 60320 APPL. INLET, FUSE HOLDER, QC
 TERMINALS; SNAP-IN

P/N	A	MAX. PANEL THICKNESS
42R44-31XX-150	1.5	1.5
42R44-31XX-200	2.0	2.0
42R44-31XX-250	2.5	2.5

ADDITIONAL PANEL THICKNESS
 AVAILABLE ON REQUEST

DRAWN BY	GQ	DATE:	11/27/01
CHECK BY	TD	DATE:	12/04/01
APPR BY	PB	DATE:	12/04/01

42R44-31XX-XXX		SHEET	1 of 1
PART #:	SIZE: A	ALL DIMENSIONS FOR REFERENCE ONLY DIMENSIONS ARE IN MILLIMETERS	
SCALE: NTS		REV:	A

REVISIONS		CHNG	CHK	APPR
REV	DATE	CHANGE		
A	9/7/17	UPDATE CURRENT RATING & APPROVALS	PB	