

TOLERANCE UNLESS OTHERWISE SPECIFICATION OF MAKE MANUAL REVISIONS TO MASTER.





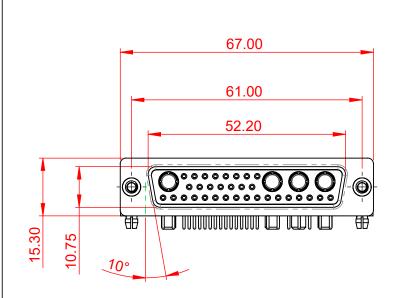



NOTES:

.X ±0.25 .XX ±0.13

.XXX ±0.05


MATERIAL: HOUSING: THERMOPLASTIC POLYESTER, UL94V-0 SHELL: STEEL, TIN PLATED CONTACT: COPPER ALLOY, GOLD FLASH PLATING

OPERATING TEMPERATURE: -55°C ~ 125°C


 $\label{eq:signal_contact_current rating: 5A per contact} \\ \mbox{Signal_contact resistance: 10m} Ω MAX. \\ \mbox{Insulator resistance: 5000M} Ω min. \\ \mbox{Dielectric} \\ \mbox{Withstanding voltage: 1000V AC rms} \\ \mbox{Ac rms} \\ \mbox{Insulator resistance: 5000V AC rms} \\ \mbox{$

CONTACT CODE 40 POWER CONTACT FOOTPRINT - 13.20mm 40 IS STANDARD AS SHOWN ON SHEETS 3 & 4 CONTACT CODE 50 POWER CONTACT FOOTPRINT - 20.33mm

		SW REFERENCE NO.: 630 COMBO ASSEMBLY			
	COMBINATION	DRAWN: C.B	DATE: JAN. 01/2019		
		CHECKED:	DATE:		
	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	4
	YOUR CONNECTION TO QUALITY & SERVICE	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 630-36W4250-4T3		ISSUE
			PART NUMBER: 630-36W	4250-4T3	1

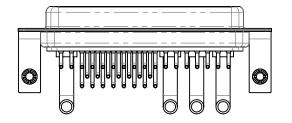

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY. UL94V-0

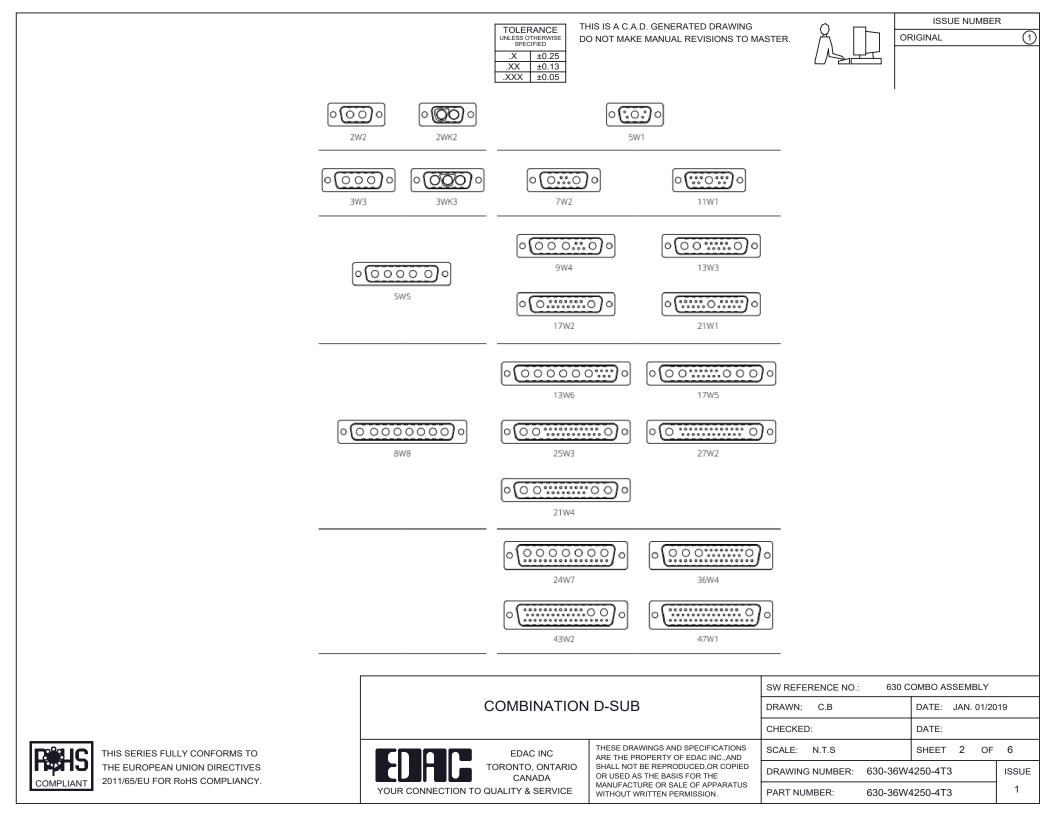



THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER ORIGINAL

(1)

2W2 / 2WK2

3W3 / 3WK3

5W1 Male/Female

7W2 Male/Female





5W5 Male



PCB EDGE

8W8 Male



PCB EDGE



PCB EDGE



27W2 Male/Female

21W1 Male/Female

21W4 Male/Female

PCB EDGE


22.70

5W5 Female




8W8 Female






17W2 Male/Female

11W1 Male/Female





OF 4

ISSUE

1

PCB EDGE

SW REFERENCE NO. 630 COMBO ASSEMBLY COMBINATION D-SUB C.B DATE: JAN. 01/2019 DRAWN: CHECKED: DATE: THESE DRAWINGS AND SPECIFICATIONS 3 SCALE: N.T.S SHEET EDAC INC ARE THE PROPERTY OF EDAC INC..AND TORONTO, ONTARIO SHALL NOT BE REPRODUCED, OR COPIED 630-36W4250-4T3 DRAWING NUMBER: OR USED AS THE BASIS FOR THE CANADA MANUFACTURE OR SALE OF APPARATUS YOUR CONNECTION TO QUALITY & SERVICE PART NUMBER: 630-36W4250-4T3 WITHOUT WRITTEN PERMISSION.


CURRENT RATING / ØA 10A / 2.2 20A / 3.3 30A / 3.7 40A / 4.2



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

	PCB	EDGE	





THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER.
















13W3 Male





25W3 Male





36W4 Female



13W6 Male





30.50

2.77

22.16

20.7

13.72

PC8 EDGE

13W6 Female

24.77

13W3 Female

.X ±0.25 .XX

±0.13 .XXX ±0.05

43W2 Female



17W5 Male


COMPLIANT







COMBINATION D-SUB



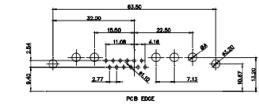

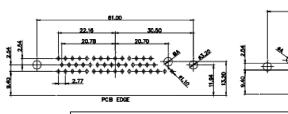

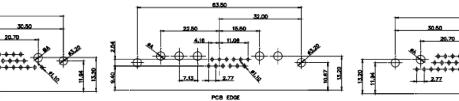

THESE DRAWINGS AND SPECIFICATIONS

SHALL NOT BE REPRODUCED, OR COPIED

MANUFACTURE OR SALE OF APPARATUS

ARE THE PROPERTY OF EDAC INC..AND

OR USED AS THE BASIS FOR THE

WITHOUT WRITTEN PERMISSION.

PCB EDGE

31.75

PCB EDGE SW REFERENCE NO. 630 COMBO ASSEMBLY DRAWN: C.B DATE: JAN. 01/2019 CHECKED: DATE: OF 4 SCALE: N.T.S SHEET 4 630-36W4250-4T3 DRAWING NUMBER: ISSUE 1 630-36W4250-4T3 PART NUMBER:



THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

