



■ Features

- Single output from 10-13.5W
- 100-240Vac Universal Input
- Certificates: UL, CE
- Safety standard: IEC60950, IEC60601, IEC61558, IEC60335
- Frequency: 50-60Hz
- Ripple: 60mV
- OVP, OCP, SCP, and OTP
- Efficiency Level: VI
- Interchangeable Plug types: US, EU, AU, UK
- MTBF: 50,000 hours
- Dimension: 65\*39.2\*32.1mm(exclude plug)



\*Product images are for illustrative purposes only and may vary from actual design.

■ Application

- Consumer electronics, Telecom and office equipment
- Industrial equipment


■ Model List


Custom Designs Available!

Model	Output Voltage	Output Current	Power	Certificates
WM012S-050I-TP1-XX	5V	2A	10W	UL, CE
WM012S-060I-TP1-XX	6V	2A	12W	UL, CE
WM012S-090I-TP1-XX	9V	1.5A	13.5W	UL, CE
WM012S-120I-TP1-XX	12V	1A	12W	UL, CE
WM012S-240I-TP1-XX	24V	0.5A	12W	UL, CE

■ Mechanical Diagram

\*Available with Internal USB Port. Detached USB DC Cable is optional (not included)!

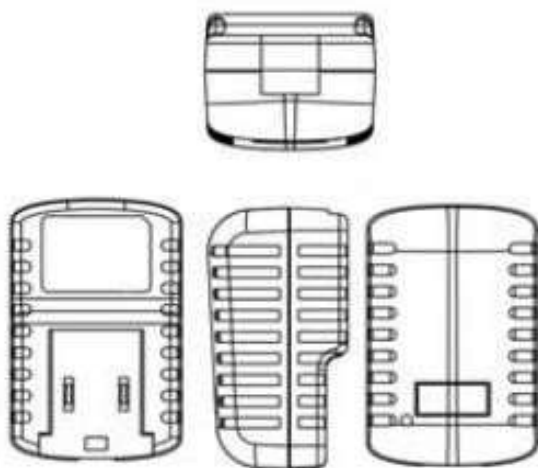

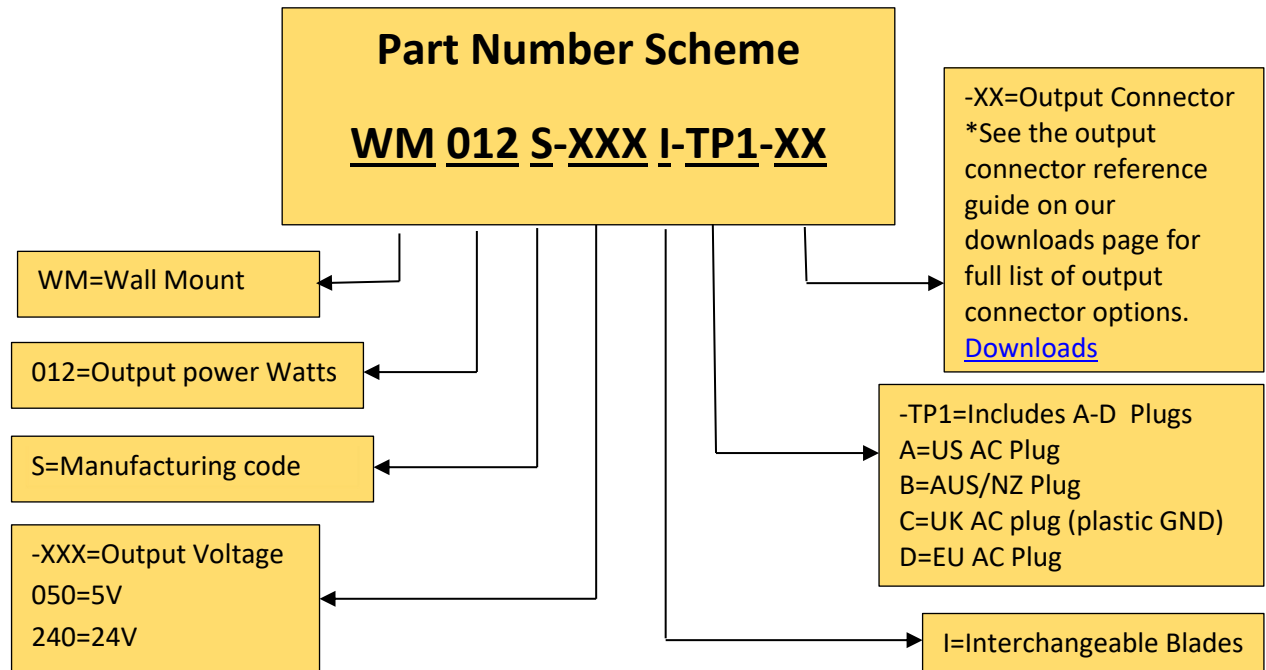

\*Product images are for illustrative purposes only and may vary from actual design.

\*Specifications are subject to change without notice. Autec is not responsible for issues arising from errors or omissions.