


| ITEM NO. | PART NUMBER | DESCRIPTION | QTY. | COMPONENT NOTES |
|----------|----------------|--|------|-----------------|
| 1 | 10-03172 | Cable, 1500 mm, 5.5x2.1x9.5 mm 50-00133 90° plug to stripped tinned, 24 AWG, 30-00344 wire | 1 | |
| 2 | Nema 1-15 plug | NEMA 1-15 plug, nickel plated | 1 | |
| 3 | 26-00002 | Case, wall mount, ac-dc power supply, 68.5x43x32.5 mm, NEMA 1-15 | 1 | |

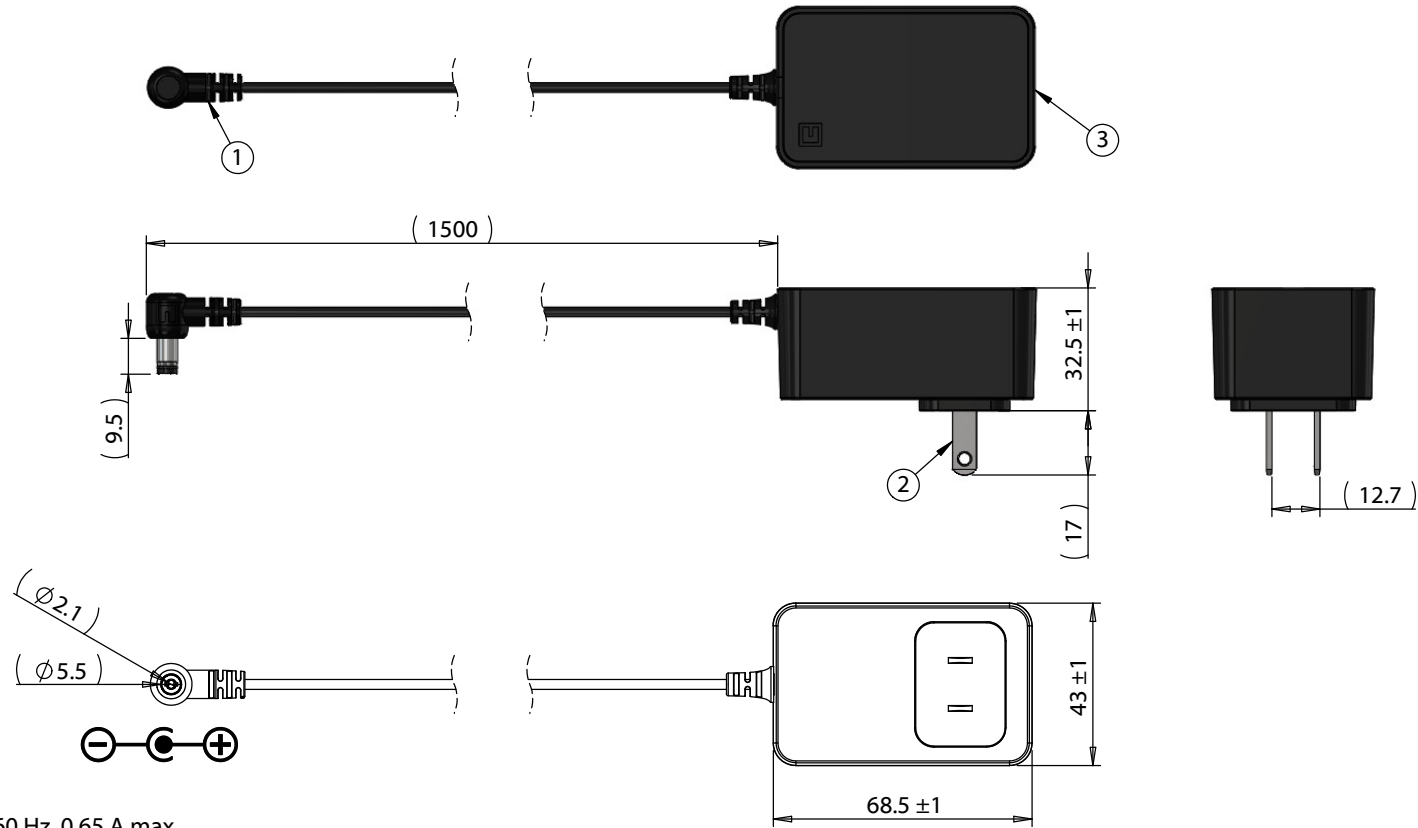

Features:

- Wattage: 24 W, continuous
- Input voltage: 100 - 240 Vac, 50/60 Hz, 0.65 A max
- Output voltage: 24 Vdc
- Output current: 1 A
- Efficiency: DoE Level VI
- Safety: UL 62368-1

| | | | | | |
|-----------|------------|-----------------|--|--|---|
| Revision: | Date: | Description: | Prepared: | Notes: | <h1>TENSILITY</h1> |
| A | 03/18/2019 | Initial release | Verified: | RoHS compliant Approvals: | |
| | | | Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm | Description: Adapter, WP, 120V, US, 2P, 24V 1000 mA, 5.5x2.1x9.5 mm 90° plug, 10-03172 cable, C+, Level VI | tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com |
| | | | | | Size: A Part number: 16-00210 |
| | | | | | Scale: 1:2 Sheet 1 of 2 |

5


4

3

2

1

| | Rating | Conditions |
|---------------------------------|---|---|
| Input | | |
| Input voltage | 100 - 240 Vac | single phase |
| Frequency | 50 - 60 Hz | |
| Steady ac current | 0.65 A max | 100 - 240 Vac |
| Inrush current | 60 A max | 240 Vac, cold start |
| Standby power | 0.1 W max | 115 or 230 Vac |
| Output | | |
| No load output voltage | 22.8 - 25.2 Vdc | |
| Full load output voltage | 22.8 - 25.2 Vdc | 1 A |
| Power | 24 Watts continuous | all specified conditions |
| Ripple voltage | 150 mV p-p at 1A | 20 MHz bandwidth oscilloscope, terminated with 0.1 μ F ceramic capacitor and 10 μ F electrolytic capacitor, 25 °C |
| Over current protection | 110 - 200% of max load | |
| Short circuit protection | input power shutdown, auto-recovery after fault removed | output short |
| Reliability & Safety | | |
| Leakage current | 0.25 mA max | nominal ac input voltage and frequency |
| Burn-in test | 2 hours | 45 °C max at normal input voltage and rated load |
| Efficiency | DoE Level VI, 86.2% min | 115 or 230 Vac |
| MTBF | 30,000 hours min | Telecordia SR-332 |
| Hi-Pot (primary to secondary) | 3300 Vac, 5 mA max | 3 seconds (production testing) |
| Hi-Pot (primary to secondary) | 3000 Vac, 10 mA max | 60 seconds (safety testing) |
| Insulation resistance | 100 M Ω , primary to secondary | 500 Vdc |
| Safety testing | UL 62368-1 | |
| Mechanical | | |
| Weight | 105 \pm 10 g | |
| Environmental | | |
| Operating temperature | 0 to 45 °C | 10 - 90% relative humidity |
| Storage temperature | -25 to 70 °C | 5 - 95% relative humidity |

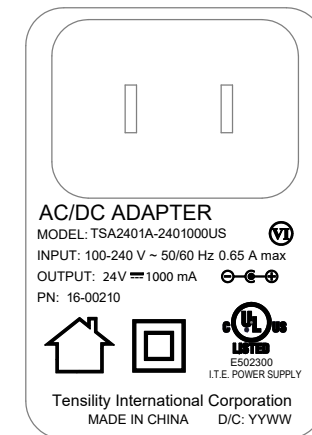

Not to Scale

| | | | | | |
|-----------|------------|-----------------|--|--|---|
| Revision: | Date: | Description: | Prepared: | Notes: RoHS compliant Approvals: | TENSILITY tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com |
| A | 03/18/2019 | Initial release | Verified: | | |
| | | | Dimensions are in millimeters. Tolerances: X: \pm 0.5 mm X.X: \pm 0.3 mm X.XX: \pm 0.05 mm | Description: Adapter, WP, 120V, US, 2P, 24V 1000 mA, 5.5x2.1x9.5 mm 90° plug, 10-03172 cable, C+, Level VI | Size: A Part number: 16-00210 |
| | | | | | Scale: 1:1 Sheet 2 of 2 |

5

4

3

2

1