

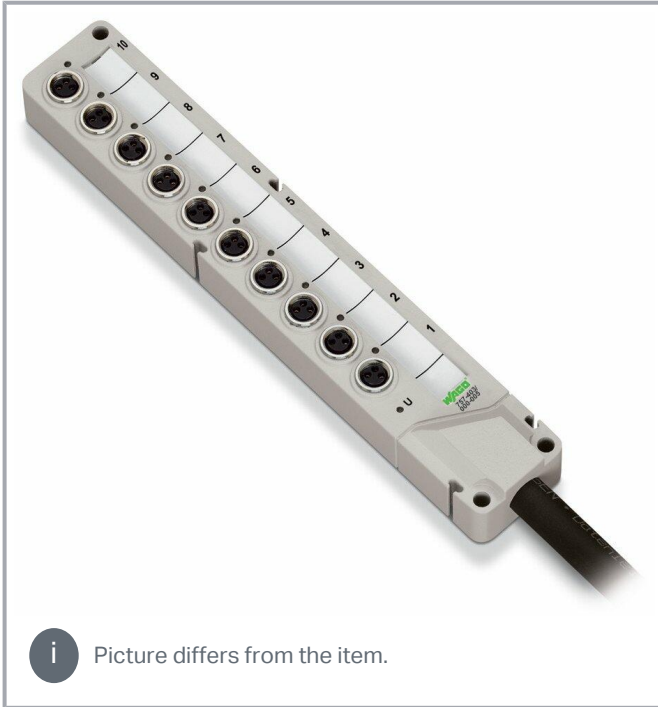


Data sheet | Item number: 757-443/000-002  
M8 sensor/actuator box; 4-way; 3-pole; 2 m

[www.wago.com/757-443/000-002](http://www.wago.com/757-443/000-002)

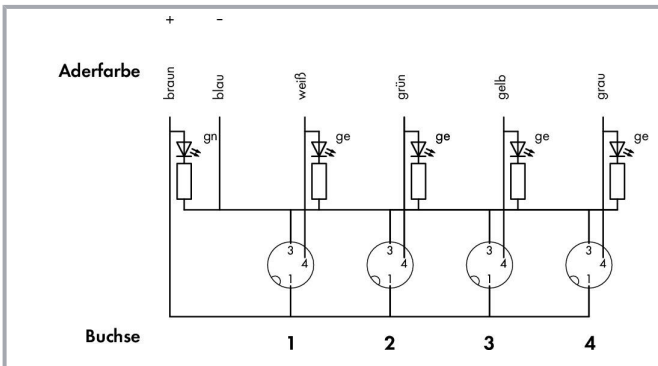

**i** Picture differs from the item.

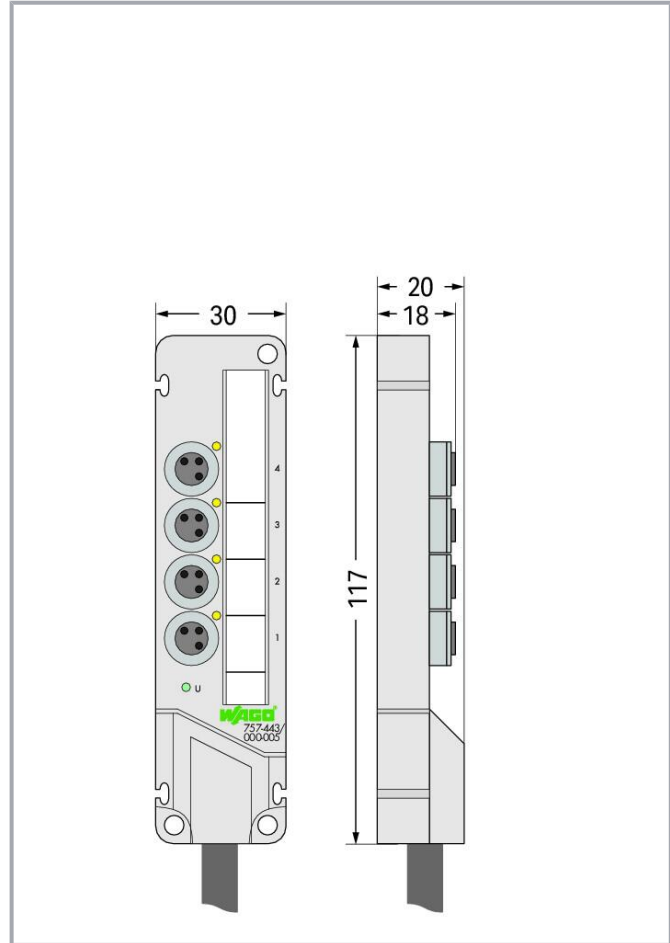

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



## Item description

- M8 sensor/actuator box, 4-way
- 3-pole (1 signal per contact)
- 2 m cable length (open cable end, 200 mm, stripped)
- Green LED operating indicator
- Yellow LED status indicator
- inkl. Beschriftungsstreifen (alternativ können WMB-Beschriftungsschilder eingesetzt werden)
- incl. M8 protective caps (2 pcs)

## Data

### Technical data

Contact resistance (max.)	0.01 $\Omega$
Supply voltage	10 ... 30 VDC; Rated voltage: 32 V ~ rms
Current carrying capacity (signal connections)	2 A
Current carrying capacity (supply connections)	6 A
Rated value of electrical isolation	500 V
Functionally separated potential groups	Kontakt/Kontakt
Insulation resistance	1000 M $\Omega$
Signal characteristics	PNP
Indicators	LED yellow: Signal status (1 x per contact); LED (U) green: Sensor /actuator box status

### Connection data

Connection technology: inputs/outputs	4 x M8 socket; 3-pole
Connection technology: trunk cable	1 x Fixed connecting cable
Length of connection cable	2 m
Strip length	200 mm / 7.87 inches
Wire colors	white, green, yellow, gray, brown, blue
Cable design	Wire cross-section: 0.34 mm <sup>2</sup> ; Wire cross-section (2): 0.75 mm <sup>2</sup>

### Physical data

Width	30 mm / 1.181 inches
Height	20 mm / 0.787 inches
Depth	117 mm / 4.606 inches

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
 Hansastr. 27  
 32423 Minden  
 Phone: +49571 887-0 | Fax: +49571 887-169  
 Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
 We are always happy to take your call at +49 (571) 887-44222.



## Mechanical Data

Mounting type	Screw mounting
Weight	142 g

## Material Data

Housing material	PA 66 (UL 94 V0); RAL 7035; silicon and halogen free
Halogen-free	Yes
Sheathed cable diameter	6.4 mm
Bending radius	10 x cable diameter (min.) for flexible application
Material properties of the connections	Contact: CuSn, nickel base-coat plating and 0.8 µm gold-plated; Threaded bush: die-cast Zn, nickel-plated; Seal: Viton; 50 mating cycles
Sheath material	PUR
Sheathed cable color	black
Encapsulation	Fully encapsulated with conformal coating (UL 94 V0)

## Environmental requirements

Ambient temperature (operation)	-25 ... +80 °C
Ambient (operating) temperature (dynamic)	-5 ... +80 °C
Ambient (operating) temperature (static)	-40 ... +80 °C
Protection type	IP68
Note on protection type	72 h at a depth of 1 m under water per EN 60529 in the fully locked position with its plugs or protective caps
Pollution degree	3 per VDE 0110
Vibration resistance	per IEC 60068-2-6
Shock resistance	per IEC 60068-2-27

## Commercial data

eCl@ss 10.0	27-44-01-08
eCl@ss 9.0	27-44-01-08
ETIM 8.0	EC002585
ETIM 7.0	EC002585
PU (SPU)	1 pcs
Packaging type	box
Country of origin	QU
GTIN	4045454924492

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
 Hansastr. 27  
 32423 Minden  
 Phone: +49571 887-0 | Fax: +49571 887-169  
 Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
 We are always happy to take your call at +49 (571) 887-44222.


Customs tariff number	85366990990
-----------------------	-------------

## Environmental Product Compliance

CAS-No.	7439-92-1
REACH Candidate List Substance	Lead
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c)
SCIP notification number (Austria)	da12f4fa-52cd-4cc8-97df-1ac60e3246e9
SCIP notification number (Belgium)	17da21d5-1022-4416-8b92-64d4d3a090a2
SCIP notification number (Bulgaria)	6012a12f-6312-49c4-b9f9-d8e0b070c5ad
SCIP notification number (Czech Republic)	f3e5f3b3-e1ac-4516-9a85-732cfc146f54
SCIP notification number (Denmark)	4c715a08-5e2f-4569-97a6-e2c3e852ee65
SCIP notification number (Finland)	7d61207e-5662-4468-a5dc-bf3bd8afb2ed
SCIP notification number (France)	e4a1e517-a837-4ae2-b837-e413fea9cfdc
SCIP notification number (Germany)	35d85261-780f-4a1c-b9ce-4d49a940a90f
SCIP notification number (Hungary)	9d3ddbbb-626d-45f0-af19-19f7b690be48
SCIP notification number (Italy)	be5d2f03-59df-4734-a756-074e4ee059b9
SCIP notification number (Netherlands)	f066c1d1-3e32-4cc3-8f6a-70a610eae730
SCIP notification number (Poland)	5e6b3e32-05fa-4a6b-955e-e0f030de0e0a
SCIP notification number (Romania)	4a57fe85-6b75-483c-8b57-b07714756017
SCIP notification number (Sweden)	adb0566b-5e23-4b5a-bb0d-c92f382b9d15


## Approvals / Certificates

### General approvals

Logo	Approval	Additional Approval Text	Certificate name
	UL UL International Germany GmbH (ORDINARY LOCATIONS)	UL 508	E175199 Sec.5

## Optional accessories

### Cover

Cover		
	Item no.: 756-8101 M8 protective cap; for unused sockets	<a href="http://www.wago.com/756-8101">www.wago.com/756-8101</a>

### Marking accessories

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



Marking strip



**Item no.: 757-041**  
Marking strips; cut to a defined length; not stretchable; plain; snap-on type

[www.wago.com/757-041](http://www.wago.com/757-041)

Marking devices



**Item no.: 210-110**  
Fiber-tip pen

[www.wago.com/210-110](http://www.wago.com/210-110)

Mounting

Intermediate plate



**Item no.: 757-040**  
Spacer module for sensor/actuator box; 4-way

[www.wago.com/757-040](http://www.wago.com/757-040)

Downloads

Documentation

Additional Information

Disposal and Recycling	V 1.1.0	pdf	Download
Electrical and electronic equipment, Batteries, Packaging	2022 Aug 18	2.2 MB	

System Description

Sensor/Actuator Boxes – General Product Information		pdf	Download
		438.6 kB	

CAD/CAE-Data

CAD data

2D/3D Models 757-443/000-002		URL	Download
------------------------------	--	-----	----------

CAE data

EPLAN Data Portal 757-443/000-002		URL	Download
-----------------------------------	--	-----	----------

WSCAD Universe 757-443/000-002		URL	Download
--------------------------------	--	-----	----------

ZUKEN Portal 757-443/000-002		URL	Download
------------------------------	--	-----	----------

EPLAN Data Portal 757-443/000-002		URL	Download
-----------------------------------	--	-----	----------

WSCAD Universe 757-443/000-002		URL	Download
--------------------------------	--	-----	----------

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



---

## Environmental Product Compliance

### Compliance Search

Environmental Product Compliance 757-443/000-002	URL	Download
M8 sensor/actuator box; 4-way; 3-pole; 2 m		

---

## Installation Notes

Subject to changes. Please also observe the further product documentation!

---

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.