



S21 TRANS LOG MAG.  
▶0.000 dB 0.100 dB/DIV

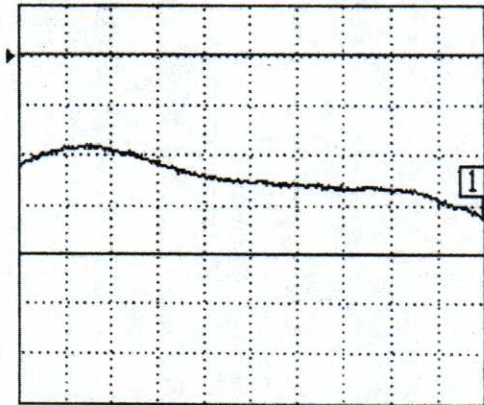


0.950000000 GHz 1.225000000

S11 REFL LOG MAG.  
▶0.000 dB 5.000 dB/DIV

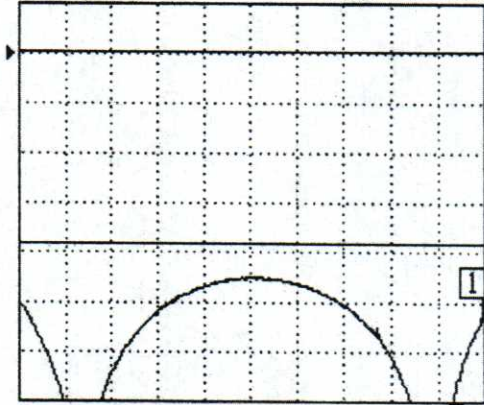


0.950000000 GHz 1.225000000

S22 REFL LOG MAG.  
▶0.000 dB 5.000 dB/DIV

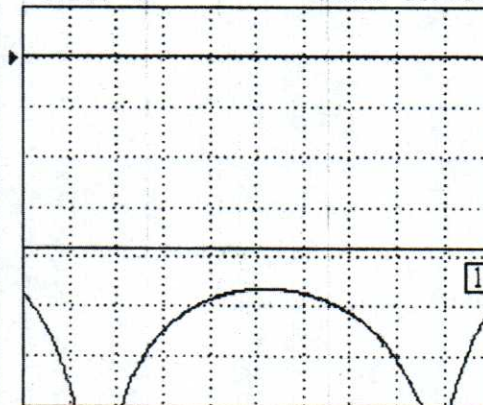

0.950000000 GHz 1.225000000

S12 TRANS LOG MAG.  
▶0.000 dB 5.000 dB/DIV

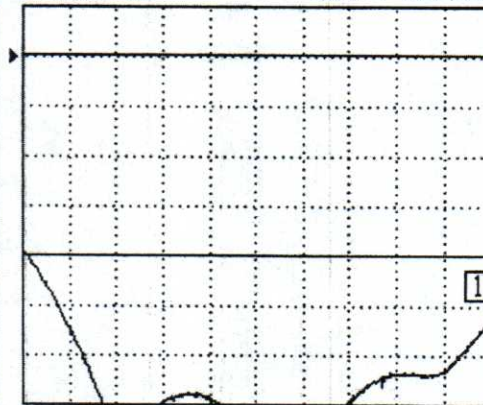

0.950000000 GHz 1.225000000

CH 1 - S21  
0.0000 mm REF  
0.000 dB OFFSET  
0.00° OFFSET

▶MARKER 1  
1.225000000 GHz  
-0.326 dB

MARKER TO MAX  
MARKER TO MIN

MARKER READOUT  
FUNCTIONS

D3C 9525 S - circulator

950 - 1225 MHz

Isolation: 20 dB Min

Insertion Loss: 0.40 dB Max

VSWR: 1.25:1 Max

SMA-F All 3 Ports