



**Electrical specifications**

**Center Frequency:** 250 MHz  
**Passband (Pb):** 55 MHz  
**Ins. Loss in Pb:** 1.5dB  
**Insertions loss in Pb:** 1.5dB  
**Rejection 1:** >=40dB@216MHz  
**Rejection 2:** >= 40dB@290MHZ  
**Power:** 50W


**Mechanical**

**Mounting Method:** Threaded Mounting  
**Connector Type:** SMA (F)  
**Dimensions:** 4.50" x 1.50" x 0.63"

**Environmental**

**Operating Temperature:** -40°C to +75°C  
**Storage Temperature:** -55°C to +100°C

**Outline Drawing:**

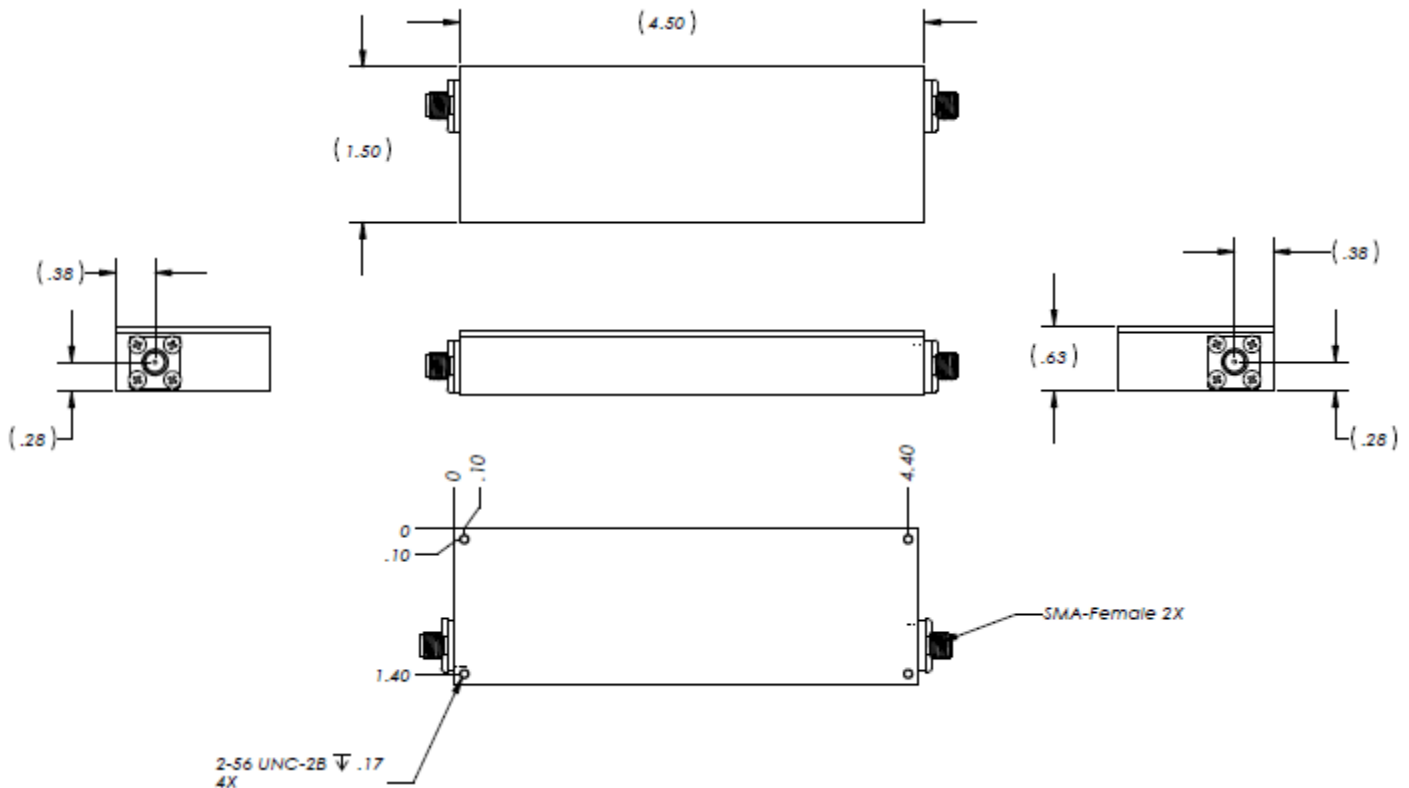



### Response Plot:

