

Crimp contact - CK1,6-BR-2,50BU OIC AG - 1004383

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Crimp contact, contact diameter: 1.6 mm, rolled, Socket, contact material: Cu alloy, nickel-plated, contact surface: silver-plated, connection cross section: 1.5 mm² ... 2.5 mm², AWG 16 ... 14, Taped products



Key Commercial Data

| | |
|------------------------|---------------|
| Packing unit | 5000 pc |
| Minimum order quantity | 5000 pc |
| GTIN | |
| GTIN | 4055626473406 |

Technical data

Ambient conditions

| | |
|---------------------------------|-------------------|
| Ambient temperature (operation) | -40 °C ... 125 °C |
|---------------------------------|-------------------|

Mechanical characteristics

| | |
|---|---|
| Conductor cross section | 1.5 mm ² ... 2.5 mm ² |
| Connection cross section AWG | 16 ... 14 |
| Stripping length of the individual wire | 4 mm |
| Contact diameter | 1.6 mm |
| Insertion/withdrawal cycles | ≥ 50 |

General

| | |
|-----------------------|---|
| Note | This product replaces 1884173 CK1,6-BR-1,50BU AG |
| Type | Female contact for taped products |
| Connection method | Crimp connection |
| Contact type | rolled |
| Assembly instructions | max. crimping speed for 2.5 mm ² corresponds to a cycle time of 1 second |
| Connection | A tool for automatically processing these contacts on crimping devices can be obtained from U. Kolb GmbH, Neuer Weg 32, |

Crimp contact - CK1,6-BR-2,50BU OIC AG - 1004383

Technical data

General

| | |
|--|---|
| | 71111 Waldenbuch, Germany, info@u-kolb-gmbh.de, Phone +49-(0)7157-7371-0. Order No.: 20.2001-1004382/4383, lubricant for crimp contacts: KMT 200 (wieds Ecochem AG) |
|--|---|

Material data


| | |
|--------------------------|-------------------------|
| Contact material | Cu alloy, nickel-plated |
| Contact surface material | silver-plated |

Environmental Product Compliance

| | |
|------------|---|
| China RoHS | Environmentally Friendly Use Period = 50 years |
| | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |

Drawings

Dimensional drawing

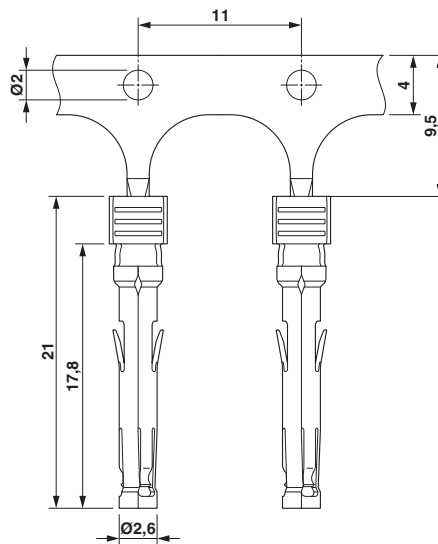

Classifications

eCl@ss

| | |
|---------------|----------|
| eCl@ss 10.0.1 | 27440204 |
| eCl@ss 11.0 | 27440204 |
| eCl@ss 5.1 | 27261200 |
| eCl@ss 6.0 | 27261200 |
| eCl@ss 7.0 | 27440204 |
| eCl@ss 9.0 | 27440204 |

ETIM

| | |
|----------|----------|
| ETIM 6.0 | EC000796 |
|----------|----------|

Crimp contact - CK1,6-BR-2,50BU OIC AG - 1004383

Classifications

ETIM

| | |
|----------|----------|
| ETIM 7.0 | EC000796 |
|----------|----------|

Accessories

Accessories

Assembly tool

Contact removal tool - VC-EW 1,6 - 1884869



Contact removal tool, for turned and rolled CK- 1.6-... contacts

Assembly tool - UNIFOX MT-CK 1.6/2.5 - 1089092



Assembly tool, for CK 1.6... crimp contacts for small conductor cross sections

Universal tools

Contact removal tool - UNIFOX RT-CK 1.6 - 1072069



Contact removal tool, for turned and rolled CK- 1.6-... contacts

Additional products

Crimp contact - CK1,6-BR-2,50ST OIC AG - 1004382



Crimp contact, contact diameter: 1.6 mm, rolled, Pin, contact material: Cu alloy, nickel-plated, contact surface: silver-plated, connection cross section: 1.5 mm² ... 2.5 mm², AWG 16 ... 14, Taped products

Phoenix Contact 2021 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>