



ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00904	Connector, 3.5xL20.7 mm stereo audio jack, nickel plating, molding type	1	
2	30-00177	Wire, 2C BC, 28 AWG, 300V, 80C, 3.8 mm, foil + shield, PVC	1	
3	24-00266	Overmold, audio jack, 3.5 mm, twist lock, TIC	1	PVC, black
4	Heat Shrink	Heat shrink tubing, black	1	
5	Heat Shrink	Heat shrink tubing, black	1	Covers shield wire

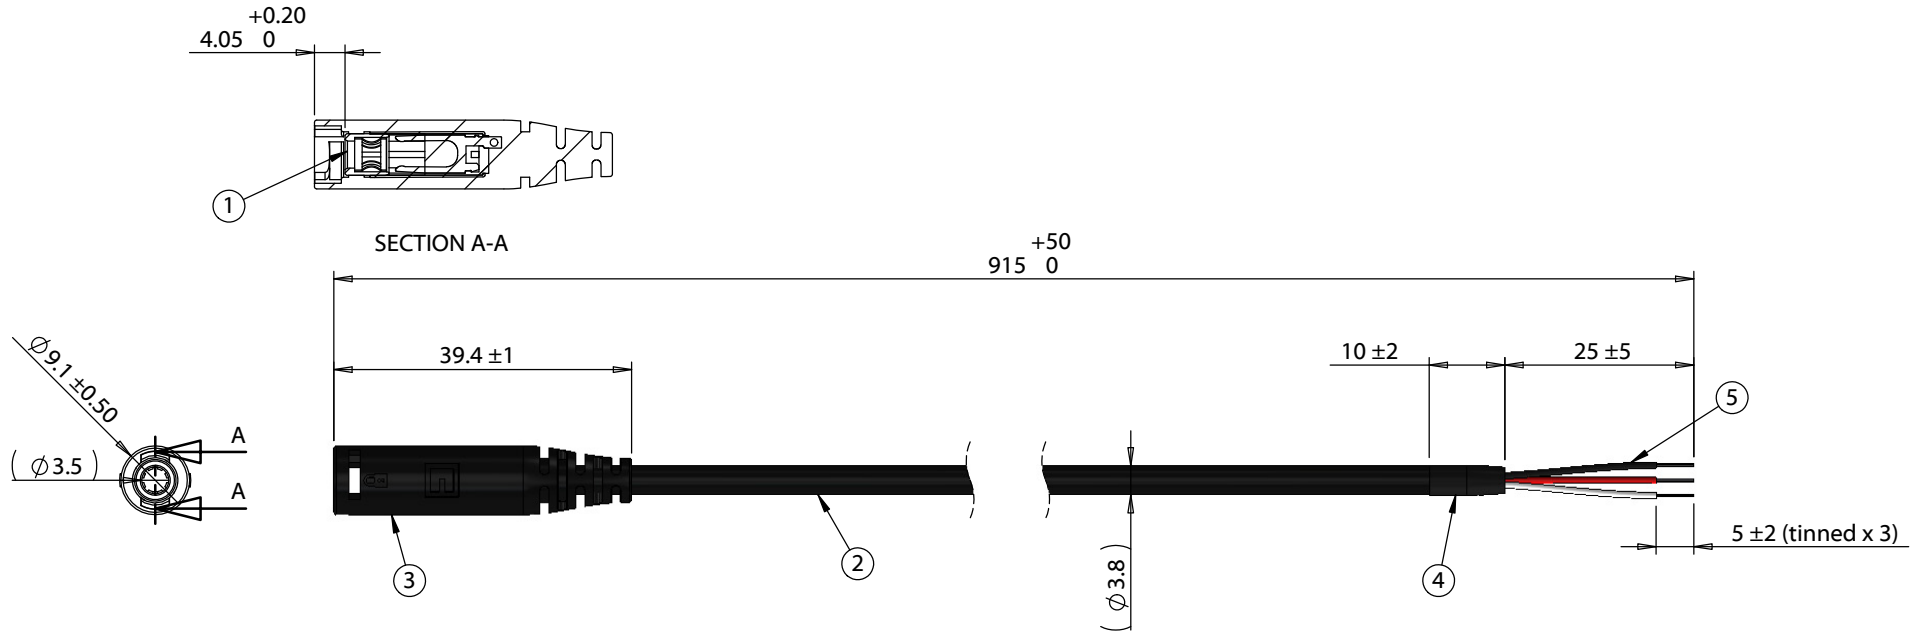

Notes:
 Made to mate with cable assembly: 10-03405
 Functionally equivalent components may be substituted

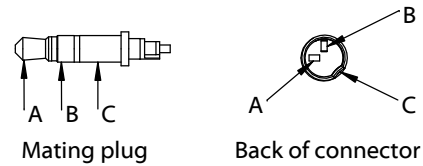

Wiring Diagram 50-00904		wire color
A		red
B		white
C		shield/black

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>
A	9/24/2019	Initial release	Verified:	RoHS compliant	
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Function test: no open, no short circuit, no intermittent	
				Description: Cable, 915 mm, 3.5 mm 3C 50-00904 twist lock audio jack to 5 mm tinned, 28 AWG, 30-00177	
			Size:	Part number:	
			A	10-03406	
			Scale:	1:1	Sheet 1 of 1

5

4

3

2

1