





10 9 8 7 6 5 4 3 2 1

FEMALE INSERT FRONT VIEW

MALE INSERT FRONT VIEW




1 BROWN/CAFE
3 BLUE/AZUL
4 BLACK/NEGRO

1 BROWN/CAFE
2 WHITE/BLANCO
3 BLUE/AZUL
4 BLACK/NEGRO

1 BROWN/CAFE
3 BLUE/AZUL
4 BLACK/NEGRO

1 BROWN/CAFE
2 WHITE/BLANCO
3 BLUE/AZUL
4 BLACK/NEGRO

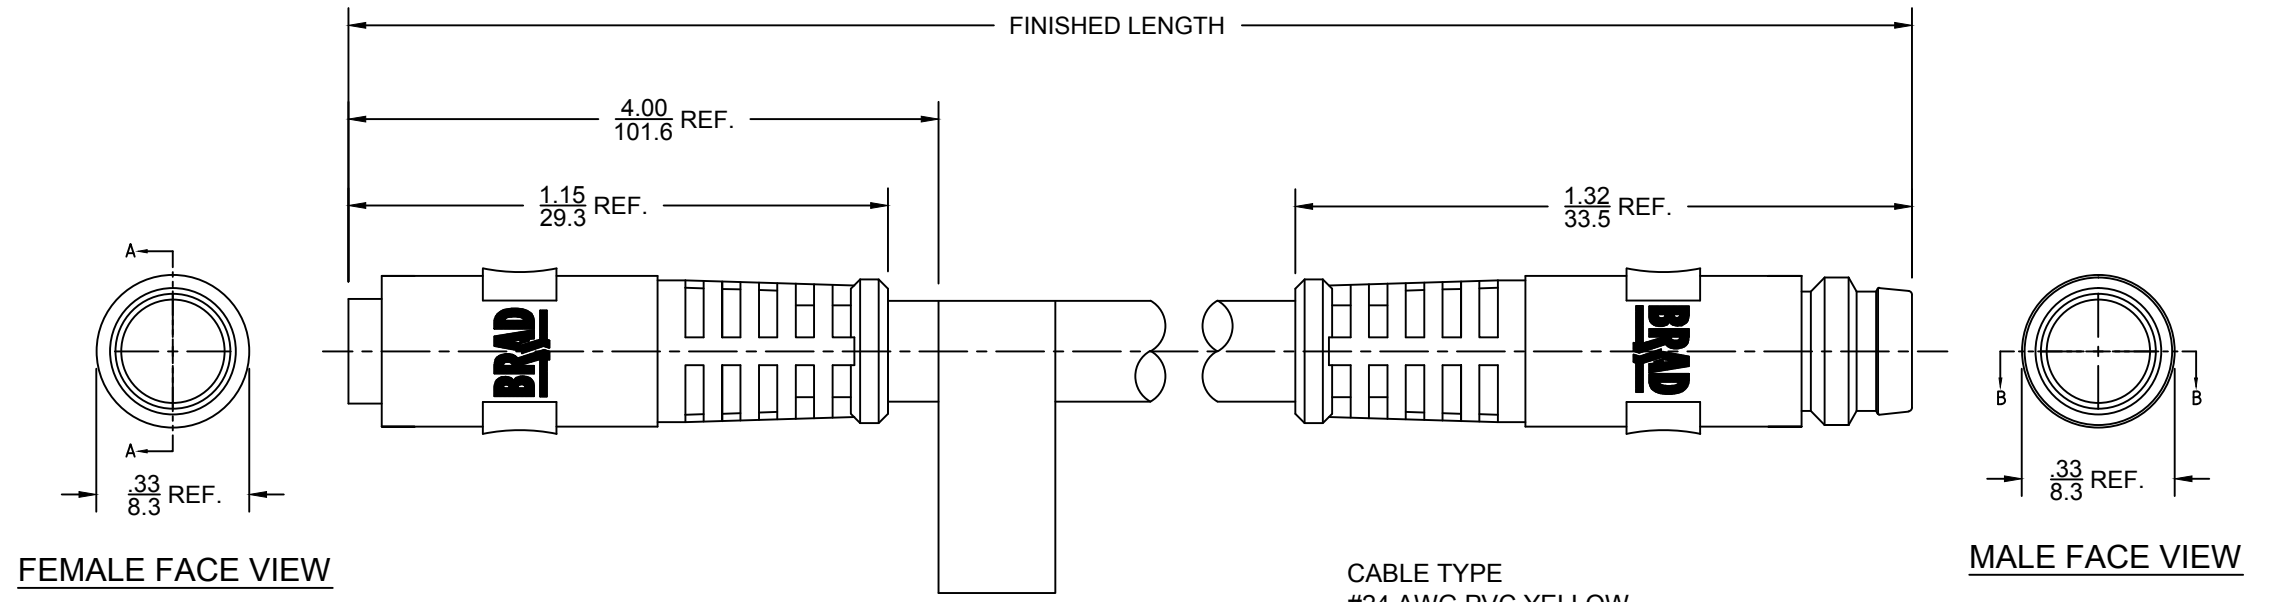

SPECIFICATIONS

MATERIALS:

FEMALE INSERT: PUR, BLACK
 MALE INSERT: NYLON, BLACK
 CONTACTS: COPPER ALLOY, GOLD PLATED
 MALE SNAP SLEEVE: BRASS, NICKEL PLATED
 OVERMOLDS: TPE, YELLOW
 LABEL: VINYL, BLACK/YELLOW
 CABLE: #24 AWG PVC YELLOW

ELECTRICAL:

CURRENT RATING: 4A
 VOLTAGE: 60VAC/75VDC

MECHANICAL:

TEMPERATURE RATING: -20°C TO 105°C
 PROTECTION: IP67 (IN FULLY MATED POSITION)

CABLE TYPE
#24 AWG PVC YELLOW

55X030A10MXXX

POLES	LENGTH
3	M001 - 0.1 METER
4	M010 - 1 METER
	M100 - 10 METER

INITIAL RELEASE EC NO: IPG2017-0081 DRWN: MZIELINS 2016/07/27 CHKD: KCOX01 2016/08/02 APPR: BWOODMAN 2016/08/05	QUALITY SYMBOLS ▽=0 ▽C=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE NTS	DESIGN UNITS INCH	THIRD ANGLE PROJECTION		
		4 PLACES	±---	±---	DRAWN BY	DATE	NANO-CHANGE M/MFE STR/STR SNAP ASSEMBLY			
		3 PLACES	±---	±---	MZIELINS	2016/07/27				
		2 PLACES	±---	±---	CHECKED BY	DATE	MOLEX INCORPORATED			
1 PLACE	±---	±---	KCOX01	2016/08/02						
ANGULAR ±---°		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		APPROVED BY DATE BWOODMAN 2016/08/05		MATERIAL NO. SEE MATRIX		DOCUMENT NO. SD-120088-040		
SIZE B		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								

10 9 8 7 6 5 4 3 2 1