

Coupler connector - SB-8EP8D8A9L34S - 1623715

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Coupling connector, straight long, shielded: yes, for standard and SPEEDCON interlock, M40, No. of pos.: 8+4+PE, type of contact: Pin, Crimp connection, cable diameter range: 20.5 mm ... 26.5 mm

Your advantages

- ✓ All housing can be fitted with pin or socket contacts
- ✓ A total of eight contacts are available for signal transmission
- ✓ Mechanical coding reliably prevents incorrect connections
- ✓ Safe use in the field, thanks to high degree of protection
- ✓ Consistent EMC protection for reliable connection solutions in the industrial environment

Key Commercial Data

| | |
|--------------|---|
| Packing unit | 1 pc |
| GTIN |  4 055626 194783 |
| GTIN | 4055626194783 |

Technical data

Temperature range

| | |
|---------------------------------|-------------------|
| Ambient temperature (operation) | -40 °C ... 130 °C |
|---------------------------------|-------------------|

Data of the insulating body

| | |
|--|--------------------|
| Coding | Signal, coding 2 |
| Contact connection method | Crimp connection |
| Type of contacts | Pin |
| Application | Hybrid |
| Number of positions | 13 |
| Contact diameter of power contacts | 3.6 mm |
| Litz wire cross section of power contacts min. | 1 mm ² |
| Litz wire cross section of power contacts max. | 16 mm ² |
| Nominal current per power contact at 25°C | 70 A |

Coupler connector - SB-8EP8A9L34S - 1623715

Technical data

Data of the insulating body

| | |
|---|----------------------|
| Rated surge voltage | 6 kV |
| Degree of pollution | 3 |
| Rated voltage (II/3) power contact | 850 V DC |
| Rated voltage (III/3) power contact | 630 V AC |
| Contact diameter of signal contacts | 1 mm |
| Litz wire cross section of signal contacts min. | 0.06 mm ² |
| Litz wire cross section of signal contacts max. | 1.5 mm ² |
| Nominal current per signal contact at 25°C | 8 A |
| Rated surge voltage | 6 kV |
| Rated voltage (III/3) signal contact | 500 V |
| Contact diameter, data contacts | 1 mm |
| Litz wire cross section, data contacts, min. | 0.06 mm ² |
| Litz wire cross section, data contacts, max. | 1.5 mm ² |
| Nominal current per data contact at 25°C | 8 A |
| Nominal voltage of data contact | 50 V |
| Rated surge voltage | 1.5 kV |
| Rated voltage (III/3) data contact | 50 V |

Housing data

| | |
|--|--|
| Housing material | Turned parts: copper zinc alloy (CuZn), die-cast parts: zinc (GD-Zn) |
| Type of locking | for standard and SPEEDCON interlock |
| Degree of protection (when plugged in) | IP68/IP69K |
| Thread type | M40 |

Cable seal data

| | |
|------------------|---------------------|
| Cable diameter | 20.5 mm ... 26.5 mm |
| Sealing material | FKM |


Environmental Product Compliance

| | |
|------------|---|
| REACH SVHC | Lead 7439-92-1 |
| China RoHS | Environmentally Friendly Use Period = 50 |
| | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |

Drawings

Coupler connector - SB-8EP5D8A9L34S - 1623715


Dimensional drawing

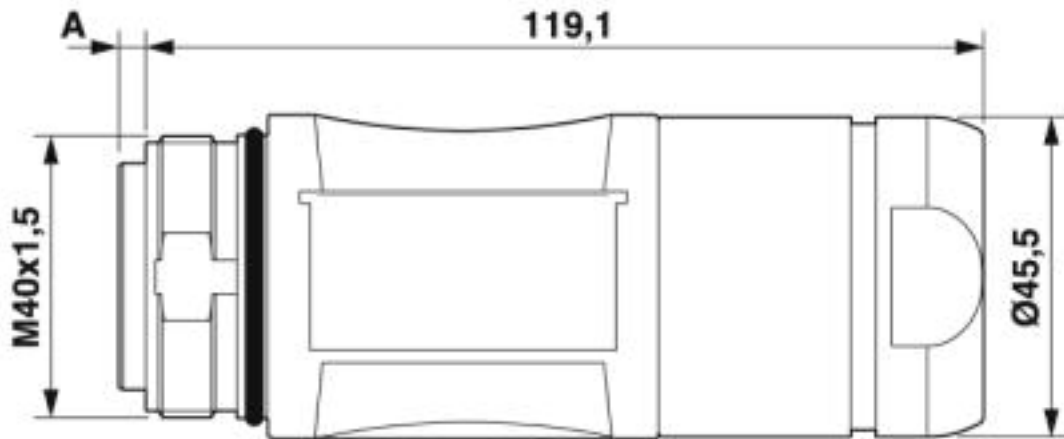

Pin version: dimension A = 3.8 mm, socket version: dimension A = 0.15 mm

Coupler connector - SB-8EP8D8A9L34S - 1623715

Schematic diagram

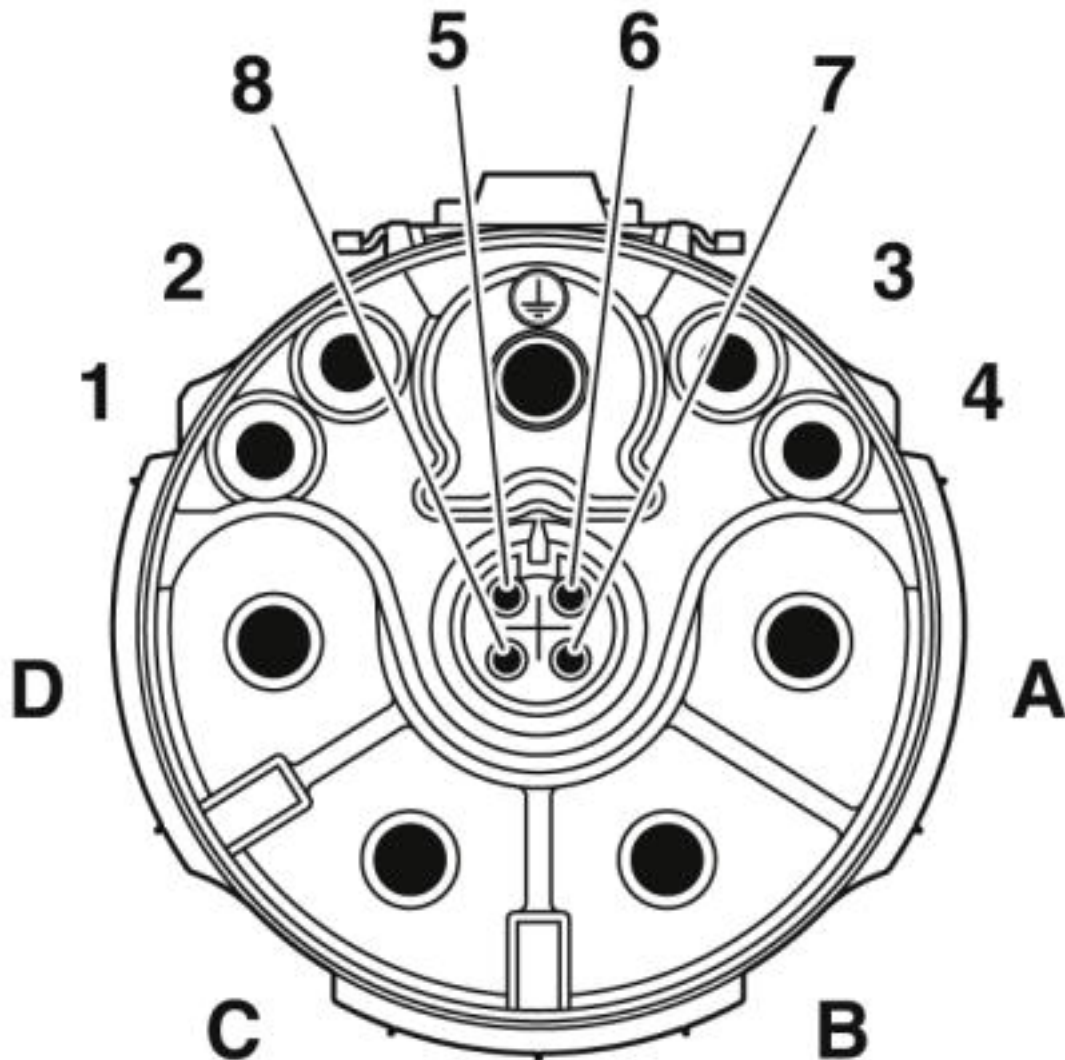

Pin assignment of pin signal, coding 2

Phoenix Contact 2019 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>