


## 20HV12B472MN

Aliases (20HV12B472M)

HV RAD-LDD Indust X7R HVHT200C, Ceramic, 4700 pF, 20%, 2000 VDC, X7R, Commercial, High Temperature, HighVoltage, Lead Spacing = 7.62mm

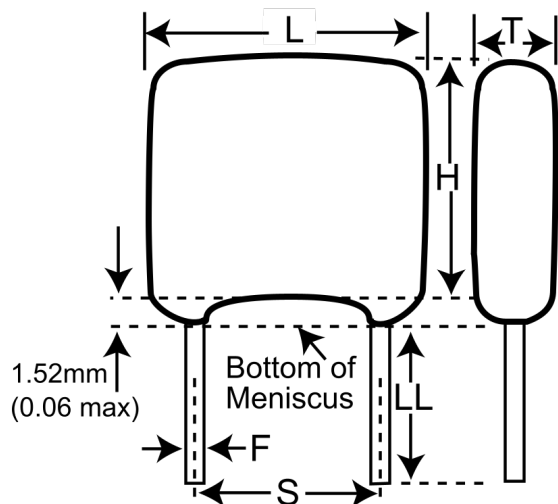

Click [here](#) for the 3D model.

### Dimensions

L	10.67mm MAX
H	10.16mm MAX
T	6.35mm MAX
S	7.62mm +/-0.762mm
LL	3.175mm MIN
F	0.635mm +0.102/-0.051mm

### Packaging Specifications

Packaging	Waffle
Packaging Quantity	28

### General Information

Series	HV RAD-LDD Indust X7R HVHT200C
Style	Radial
Description	Commercial, High Temperature, HighVoltage
Features	Commercial
RoHS	With Exemptions
REACH	SVHC (Pb - CAS 7439-92-1)
SCIP Number	ef26097b-3862-4ee0-b0ad-404a563ece0f
Termination	Nickel
Failure Rate	N/A
AEC-Q200	No

### Specifications

Capacitance	4700 pF
Capacitance Tolerance	20%
Voltage DC	2000 VDC
Dielectric Withstanding Voltage	3000 VDC
Temperature Range	-55/+200°C
Temperature Coefficient	X7R
Dissipation Factor	2%
Aging Rate	2% Loss/Decade Hour
Insulation Resistance	100 GOhms