
Mounting Option


04-.156 (3.96) Dia. Mounting Holes

Contact Detail

559-90 Degree Bend (Code 541 Contacts)

.156 [3.96] Contact Spacing x .200 [5.08] Row Spacing






See Accompanying Page for:

- **Bend Detail**
- **Mounting Options**
- **Features and Specifications**



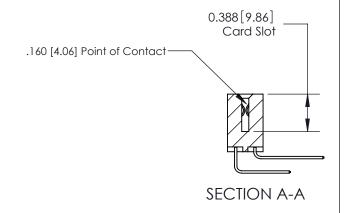

ACAD REFERENCE NO. 333 ENG MASTER

Part Number: 333-018-559-804		ACAD REFERENCE NO. 333 ENG MASTER			
		DRAWN:	J.LEE	DATE: OC	CT. 14/09
		CHECKED:		DATE:	
EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INCAND	SCALE:	NTS	SHEET '	0F 4
TORONTO, ONTARIO SHALL NOT BE REPRODUCE	SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE	DRAWING	NUMBER		ISSUE
CANADA CANADA	MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	33	3 Assembly		1

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.

1



333 Series Card Edge Connector Contact Bend Detail		ACAD REFERENCE NO. 333 ENG MASTER			
		DRAWN: J.LEE	DATE: OC	DATE: OCT. 14/09	
		CHECKED:	DATE:	DATE:	
EDAC INC THESE DRAWINGS AND SPECIFICATIONS		SCALE: NTS	SHEET :	2 OF 4	
TORONTO, ONTARIO ARE THE PROPERTY OF EDAC INC., ANI SHALL NOT BE REPRODUCED, OR COPIL OR USED AS THE BASIS FOR THE	DRAWING NUMBER	•	ISSUE		
	CONNECTION TO QUALITY & SERVICE OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		У	1	

THIS IS A C.A.D. GENERATED DRAWING
DO NOT MAKE MANUAL REVISIONS TO MASTER



SOL NUMBER

DRIGINAL

1



333 Series Card Edge Connector		ACAD REFERENCE NO. 333 ENG MASTER					
		DRAWN:	J.LEE	DATE: O	CT. 14/09		
	Mounting Options		CHECKED:		DATE:		
			THESE DRAWINGS AND SPECIFICATIONS	SCALE:	NTS	SHEET :	3 OF 4
	TORONTO, ONTARIO ARE THE PROPERTY OF EDAC INC., ANI SHALL NOT BE REPRODUCED, OR COPI OR USED AS THE BASIS FOR THE	DRAWING	NUMBER		ISSUE		
YOUR CONNECTION TO QUALITY & SERV		CANADA	MANUFACTURE OR SALE OF APPARATUS	333 Assembly			1

ISSUE NUMBER

ORIGINAL



Features

- .156 (3.96) Contact Spacing x .200 (5.08) Row Spacing
- Accepts .062 (1.57) Nominal Thickness P.C. Board
- High Profile Insulator Body .600 (15.24)
- Contact Termination Options include P.C. Tail, Wire Hole, Wire Wrap, 90 Degree, & Extender Board Bends
- Single or Dual Row Configurations
- Variety of Mounting Options, Flush or Offset Lugs
- Accepts Between Contact and In-Contact Polarizing Keys

Specifications

- Insulator Material: Thermoplastic Polyester, UL 94V-0, Colour: Green
- Contact Material: Copper, Nickel, Tin Alloy CA-725
- Contact Plating: Gold on the Mating Area, Tin on the Contact Tails, Nickel Underplate
- Current Rating: 3 Amperes Continuous
- Contact Resistance: 10 Milliohms Maximum
- Dielectric Withstanding Voltage: 1800 V AC rms at Sea Level Between Adjacent Contacts
- Insulation Resistance: 5000 Megohms Minimum
- Operating Temperature: -65 to +105 Degrees C
- Insertion Force: 16 oz (4.45 N) Maximum per Contact Pair when Tested with a .070 (1.78) Thick Gauge
- Withdrawal Force: 1 oz (0.28 N) Minimum per Contact Pair when Tested with a .054 (1.37) Thick Gauge

333 Series Card Edge Connector	ACAD REFERENCE NO. 333 ENG MASTER
Features and Specifications	DRAWN: J.LEE DATE: OCT. 14/09
realities and specifications	CHECKED: DATE:
	WINGS AND SPECIFICATIONS SCALE: NTS SHEET 4 OF 4
I SI I I ORONTO, ONTARIO SHALL NOT	BE REPRODUCED, OR COPIED DRAWING NUMBER ISSUE
	IRE OR SALE OF APPARATUS 333 Accembly 1