



.XX ±0.13 .XXX ±0.05

ISSUE NUMBER
ORIGINAL

(1)

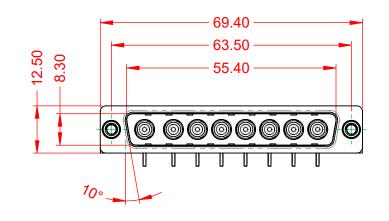



NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, 30µ" GOLD PLATED

10.67 Θ Ö Ö ÕÕÕ ٦ 6 6


OPERATING TEMPERATURE:	-55°C ~ 125°C
POWER/CO-AX CONTACT RATING: (IF PRESENT)	50Ω (IMPEDANC
SIGNAL CONTACT CURRENT RATING: SIGNAL CONTACT RESISTANCE:	5A PER CONTA 10mΩ MAX.
INSULATOR RESISTANCE: DIELECTRIC	5000MΩ min.

WITHSTANDING VOLTAGE:

ICE)

ACT

1000V AC rms



		SW REFERENCE NO.: 629 C	OMBO ASSEMBLY	
COMBINATION	COMBINATION D-SUB			19
			DATE:	
EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
TORONTO, ONTARIO CANADA		DRAWING NUMBER: 629-8W8-	640-5NE	ISSUE
YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 629-8W8-	640-5NE	1



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

