

Product data sheet

Characteristics

XVC6B2

Harmony XVC, Monolithic precabled tower light, plastic, red orange, Ø60, tube mounting, steady, without buzzer, IP23, 24 V AC/DC



Main

| | |
|------------------------------------|---|
| Range of Product | Harmony XVC6 |
| Product or Component Type | Complete pre-wired monolithic tower light |
| Beacon or indicator bank unit type | 2 illuminated units |
| Sound signalling | Without |
| Mounting diameter | 2.36 in (60 mm) |
| Component name | XVC |
| Light source | LED steady red LED steady orange |
| [Us] rated supply voltage | 24 V |
| Supply circuit type | AC/DC |

Complementary

| | |
|--|---|
| Material | Polycarbonate illuminated unit ABS (acrylonitrile butadiene-styrene) base unit PBT + ABS (UL94HB) top cover STK (chromium-plated) support tube |
| Product mounting | On support tube, 22 mm |
| Cable cross section | 0.00 in ² (0.33 mm ²) |
| AWG Gauge | AWG 22 |
| Cable length | 23.62 in (600 mm) |
| Marking | CE |
| [Uimp] rated impulse withstand voltage | 0.8 kV |
| Current Consumption | 50 mA |
| Flashing frequency | 1 Hz |
| Net Weight | 1.63 lb(US) (0.74 kg) |
| Height | 18.44 in (468.3 mm) |

Environment

| | |
|---------------------------------------|--|
| Standards | EN/IEC 61000-6-2 EN/IEC 61000-6-3 EN/IEC 61000-6-4 |
| Product Certifications | UL |
| Protective treatment | TC |
| Ambient Air Temperature for Storage | -31...158 °F (-35...70 °C) |
| Ambient Air Temperature for Operation | 14...122 °F (-10...50 °C) |
| Electrical shock protection class | Class I EN/IEC 61140 |
| IP degree of protection | IP23 vertical surface installation EN/IEC 60529 |

Ordering and shipping details

| | |
|-----------------------|------------------------|
| Category | 22617-XVC TOWER LIGHTS |
| Discount Schedule | XV |
| GTIN | 3606480032554 |
| Nbr. of units in pkg. | 1 |
| Package weight(Lbs) | 2.25 lb(US) (1.02 kg) |

| | |
|-------------------|----|
| Returnability | No |
| Country of origin | ID |

Packing Units

| | |
|------------------------------|--------------------------|
| Unit Type of Package 1 | PCE |
| Package 1 Height | 3.46 in (8.8 cm) |
| Package 1 width | 30.39 in (77.2 cm) |
| Package 1 Length | 3.35 in (8.5 cm) |
| Unit Type of Package 2 | S06 |
| Number of Units in Package 2 | 1 |
| Package 2 Weight | 28.66 lb(US) (13.0 kg) |
| Package 2 Height | 28.94 in (73.5 cm) |
| Package 2 width | 23.62 in (60 cm) |
| Package 2 Length | 31.50 in (80 cm) |
| Unit Type of Package 3 | P06 |
| Number of Units in Package 3 | 30 |
| Package 3 Weight | 95.57 lb(US) (43.348 kg) |
| Package 3 Height | 30.31 in (77 cm) |
| Package 3 width | 31.50 in (80 cm) |
| Package 3 Length | 23.62 in (60 cm) |

Offer Sustainability

| | |
|----------------------------|---|
| California proposition 65 | WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov |
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration |
| Mercury free | Yes |
| RoHS exemption information | Yes |
| China RoHS Regulation | China RoHS Declaration |
| Environmental Disclosure | Product Environmental Profile |
| Circularity Profile | End Of Life Information |


Contractual warranty

| | |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Pre-assembled and Pre-wired Tower Light with Support Tube Mounting

Dimensions

Below drawing shows the maximum configuration of the product. Select the number of stages according to the product characteristics in order to get b dimension.

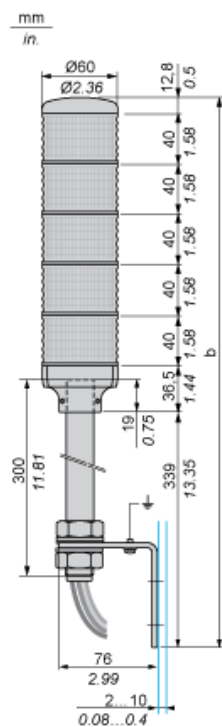

| No. of illuminated units | b Without buzzer (mm) | b Without buzzer (in.) |
|--------------------------|-----------------------|------------------------|
| 1 stage | 428.3 | 16.86 |
| 2 stages | 468.3 | 18.44 |
| 3 stages | 508.3 | 20.01 |
| 4 stages | 548.3 | 20.01 |
| 5 stages | 588.3 | 23.16 |

Pre-assembled and Pre-wired Tower Light

Support Tube Mounting

