



CATALOG LISTING
V3L-3003-D8
 PAGE 1 OF 1
M
 ISSUE 17
 REVISIONS
 A CO 92173 TSM 9 OCT 98
 B 0012902 KR 29 APR 05
 CHECK 29 APR 05
 AK
 CHECK 9 OCT 98
 J A F
 CHECK 9 OCT 98
 TSM 9 OCT 98
 DRAWN
 FORMTEK

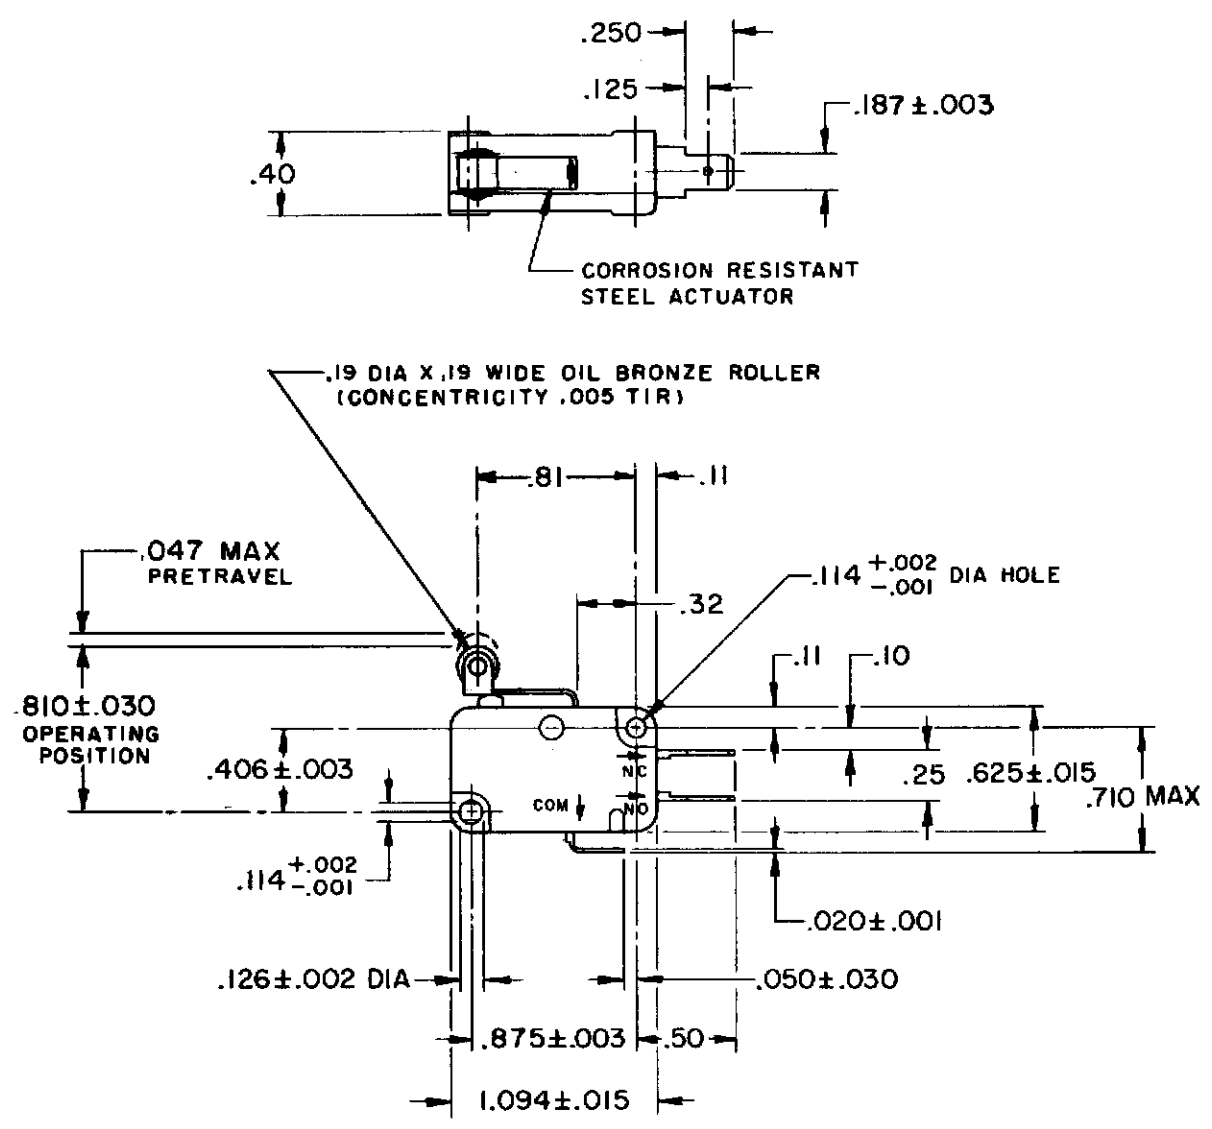

NOTES

- 1 - SWITCH MATERIALS WILL WITHSTAND TEMPERATURE OF 302° F
- 2 - CAUTION: OVERTRAVEL FORCE ON LEVER MUST NOT RESULT IN AN OVERTRAVEL FORCE ON PLUNGER EXCEEDING FIVE POUNDS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.



CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL	DO NOT SCALE PRINT
OPERATING FORCE - - - 195 GRAMS MAX	CONTACT ARRANGEMENT SPDT	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
RELEASE FORCE - - - - - 15 GRAM MIN	L83	ONE PLACE (.0) ± .030	
DIFFERENTIAL TRAVEL - - - .013 MAX	15.1A 1/2HP 125 OR 250 VAC	TWO PLACE (.00) ± .015	
OVERTRAVEL - - - - - .040 MIN	1/2A 125 VDC, 1/4A 250 VDC	THREE PLACE (.000) ± .005	
RELEASE TRAVEL - - - - - .007 MIN	5A 125 VAC "L"	ANGLES ±	
		WEIGHT	