

# Product data sheet

## Characteristics

# XZCPA1241L10

Pre wired connectors XZ, elbowed female, M12, 4 pins, cable PVC 10 m



### Main

|                                    |                                  |
|------------------------------------|----------------------------------|
| Range of Product                   | Telemecanique Cabling components |
| Accessory / separate part category | Cabling accessory                |
| Accessory / Separate Part Type     | Pre-wired connectors             |
| Series name                        | Application                      |

### Complementary

|                                |                                      |
|--------------------------------|--------------------------------------|
| Electrical connection          | Elbowed female connector M12, 4 pins |
| Cable connector fixing         | Screw-on                             |
| Collar material                | Stainless steel 316L                 |
| Status LED                     | Without                              |
| Cable length                   | 32.81 ft (10 m)                      |
| Cable outer diameter           | 0.21 in (5.3 mm)                     |
| Cable composition              | 4 x 0.34 mm <sup>2</sup>             |
| Wire insulation material       | PVC                                  |
| [Ue] rated operational voltage | 250 V AC<br>300 V DC                 |
| Line Rated Current             | 4 A                                  |
| Contact resistance             | 5000 µOhm                            |
| Minimum insulating resistance  | 1 GΩ                                 |
| Net Weight                     | 0.82 lb(US) (0.37 kg)                |

### Environment

|                                       |                                   |
|---------------------------------------|-----------------------------------|
| IP Degree of Protection               | IP69K                             |
| Ambient air temperature for operation | -13...185 °F (-25...85 °C) static |
| Ambient Air Temperature for Storage   | -31...212 °F (-35...100 °C)       |

### Ordering and shipping details

|                       |                        |
|-----------------------|------------------------|
| Category              | 22483 - MACHINE CABLES |
| Discount Schedule     | DS3                    |
| GTIN                  | 3389119021494          |
| Nbr. of units in pkg. | 1                      |
| Package weight(Lbs)   | 10.23 oz (290 g)       |
| Returnability         | No                     |
| Country of origin     | PL                     |

## Packing Units

|                              |                         |
|------------------------------|-------------------------|
| Unit Type of Package 1       | PCE                     |
| Package 1 Height             | 1.57 in (4 cm)          |
| Package 1 width              | 7.48 in (19 cm)         |
| Package 1 Length             | 7.48 in (19 cm)         |
| Unit Type of Package 2       | S03                     |
| Number of Units in Package 2 | 20                      |
| Package 2 Weight             | 19.37 lb(US) (8.784 kg) |
| Package 2 Height             | 11.81 in (30 cm)        |
| Package 2 width              | 11.81 in (30 cm)        |
| Package 2 Length             | 15.75 in (40 cm)        |


## Offer Sustainability

|                            |   |
|----------------------------|---|
| California proposition 65  | WARNING: This product can expose you to chemicals including: Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> |
| REACH Regulation           | <a href="#">REACH Declaration</a>   |
| REACH free of SVHC         | Yes   |
| EU RoHS Directive          | Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>  |
| Toxic heavy metal free     | Yes   |
| Mercury free               | Yes   |
| RoHS exemption information | <a href="#">Yes</a>   |

## Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Dimensions

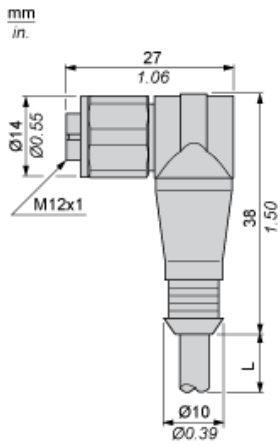


L : Length of cable

---

Connections and Schemes

---

Connector



BN : Brown  
BK : Black  
BU : Blue  
WH : White