



Kontaktstift $\varnothing 10$ mm

Einsatzbereich: - 958 Kupplung / Einbaudose

Crimp 50 mm²

TE Teile Nr.: 61-0116-023-000
IC Ref. Nr.: 61.116.23

Elektrische Werte

Bemessungsstrom max. 150 A*
Durchgangswiderstand < 90 μ Ohm

Werkstoff

Kontakt Messing, versilbert

Anschluss

Anschlussart/-bereich Crimp/ 50 mm²
max. Litzenaußendurchmesser $\varnothing 15$ mm
Abisolierlänge 17 mm
Crimpeinstellungen sind individuell zu wählen


Mechanische Werte

Steckzyklen 500

Werkzeuge (nicht im Lieferumfang enthalten)

Akku Crimpzange TE Teile Nr.: C0-0207-000-000
IC Ref. Nr.: C0.207.00

(Crimpbacken für 10 mm Kontakt TE Teile Nr.: C0-0208-000-000
IC Ref. Nr.: C0.208.00)

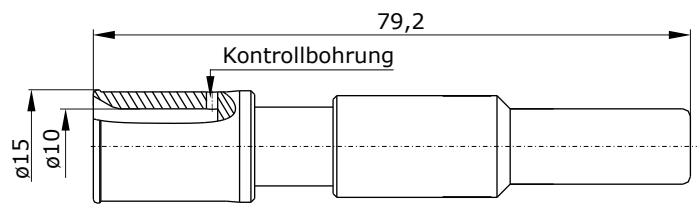

Hauptabmessungen

Kontaktstift





Contact Pin $\varnothing 10$ mm

for: - 958 Extension / Receptacle

Crimp 50 mm²

TE part number: 61-0116-023-000
IC reference number: 61.116.23

Electrical Data

rated current max. 150 A*
contact resistance < 90 μ Ohm

Material

contact brass, silver plated

Termination

cross-section crimp/ 50 mm²
max. outer wire diameter $\varnothing 15$ mm
stripping length 17 mm
crimp settings select individually


Mechanical Data

mating cycles 500

Tools (not part of product contents)

battery crimp tool TE part no.: C0-0207-000-000
IC ref. no.: C0.207.00

(crimping insert for 10 mm contact TE part no.: C0-0208-000-000
IC ref. no.: C0.208.00)

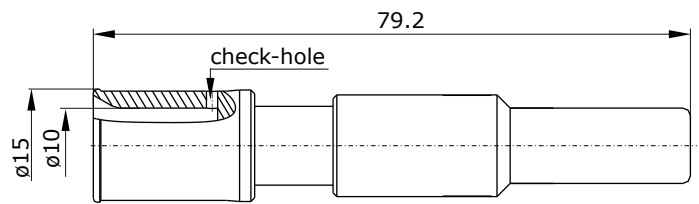

Main Dimensions

contact pin

