

Over	Up to and including	Tolerance
0	1000	±20
1000	3000	±30
3000	5000	±40
5000	10000	±50
10000	15000	±100
15000	20000	±150
20000		±L/100







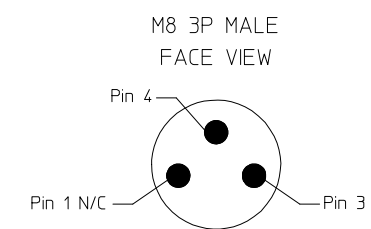


TABLE 1

MOLEX PN	Engineering No	L [mm]	Cable type
1210350203	E43000E12M015	1500	PVC Black 0.5mm²
1210350282	E43000E12M020	2000	PVC Black 0.5mm²
1210350300	E43000E12M010	1000	PVC Black 0.5mm²

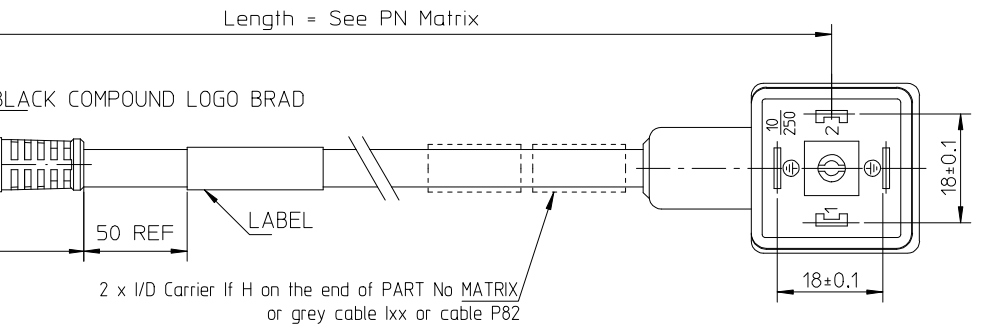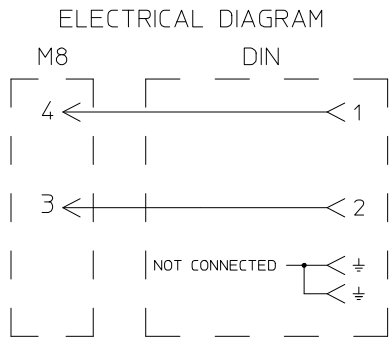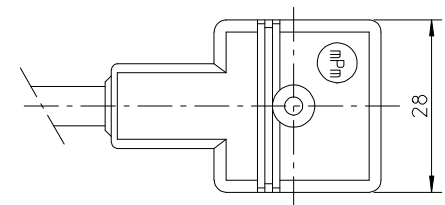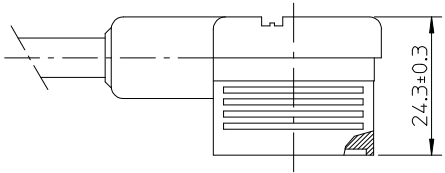

PART No MATRIX

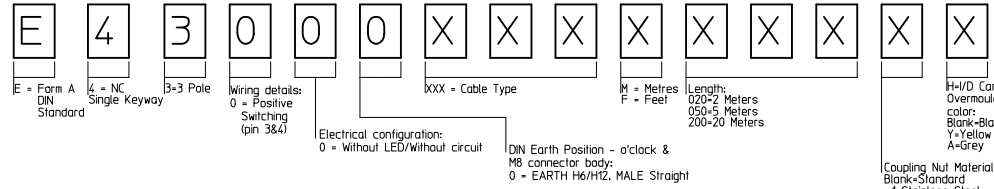

OPTIONS

ORIGINAL RELEASE EC NO: IPG2014-1462 DRWN: JMARSZALEK 2014/02/19 CHKD: MSZWAJKOWSKI 2014/03/10 APPR: MIWASIECZKO 2014/03/10	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE MM ONLY	SCALE -	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
	▽=0 ◻=0	mm INCH	DRAWN BY DATE JMARSZALEK 2014/02/19	TITLE	E43000XXXXXXX DIN A + CORDSETS M8		
		4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± --- ± --- 1 PLACE ± --- ± --- 0 PLACE ± --- ± ---	CHECKED BY DATE MSZWAJKOWSKI 2014/03/10	APPROVED BY DATE MIWASIECZKO 2014/03/10			
		ANGULAR ± --- °	MATERIAL NO.	DOCUMENT NO.			
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	SIZE A3	SEE TABLE 1	SD-121035-004 1 OF 1			
		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					