THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION - ,- .
© COPYRIGHT - By - ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	REVISED PER ECO-17-015513	18DEC2017	PHM	CT

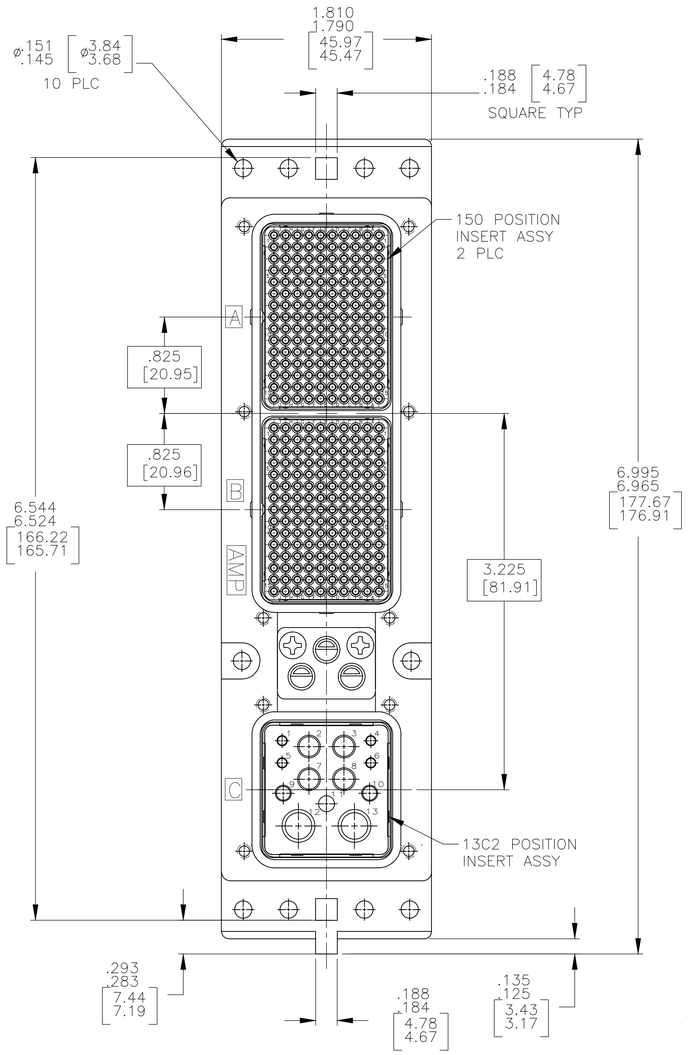

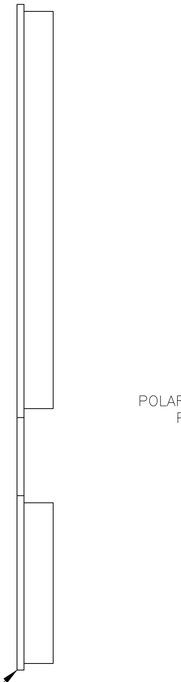

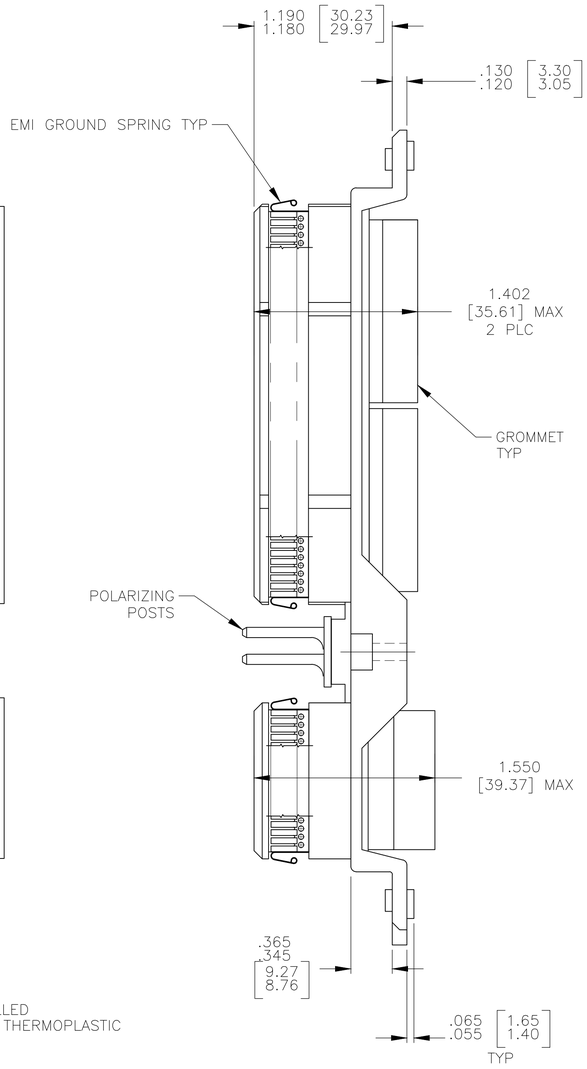

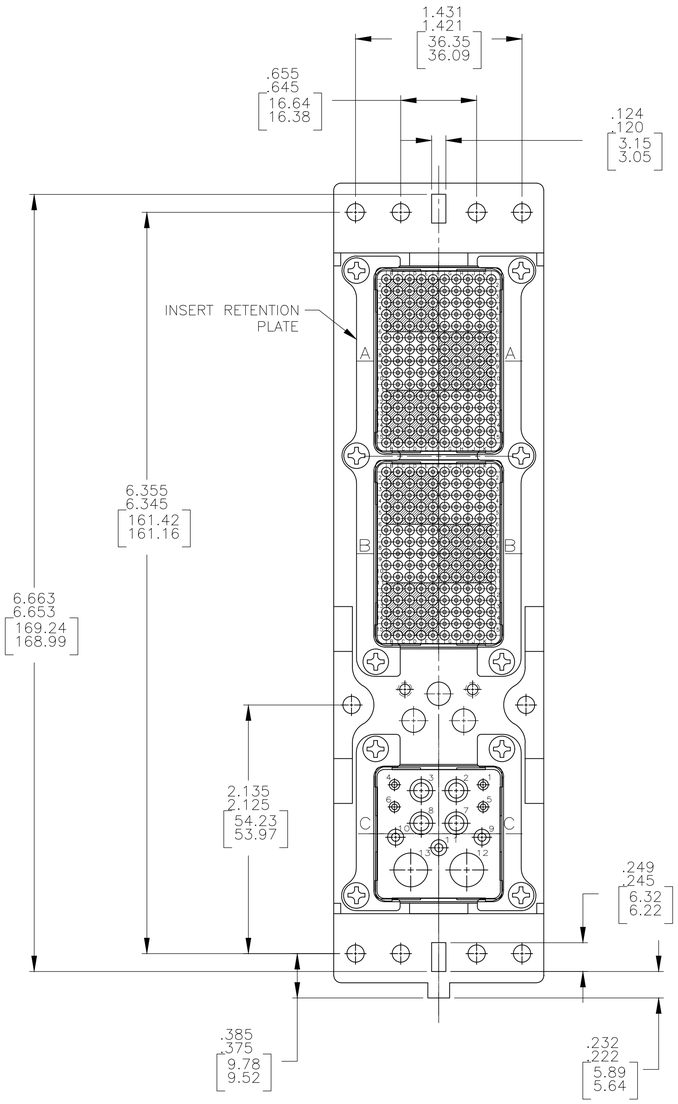

COMPONENT	MATERIAL	FINISH
SHELL	DIE CAST ALUMINUM PER ASTM-B-85	ELECTROLESS NICKEL PER MIL-C-26074
INSERT RETENTION PLATES	ALUMINUM ALLOY PER ASTM-B-209	ELECTROLESS NICKEL PER MIL-C-26074
SCREWS	STAINLESS STEEL	PASSIVATED
POLARIZING POST	ZINC ALLOY PER ASTM-B-86	-
150 & 13C2 INSERTS	THERMOSET OR THERMOPLASTIC PPS PER MIL-M-24519	-
POLARIZING POST RETAINING PLATE	ALUMINUM ALLOY PER ASTM-B-209	BLUE ANODIZED PER MIL-A-8625
EMI GROUND SPRING	BERYLLIUM COPPER 172 (ALLOY 29)	ELECTRODEPOSITED NICKEL PER AMS-QQ-N-290

01	MODULE A 208262-3; SZ 22 PIN CONTACT (QTY=150) MODULE B 208262-3; SZ 22 PIN CONTACT (QTY=150) MODULE C 208267-2; SZ 20 SOCKET CONTACT (QTY=4) 208270-2; SZ 16 SOCKET CONTACT (QTY=3) 208273-2; SZ 12 SOCKET CONTACT (QTY=4) 1484225-1 SZ 5 FILLER PLUG (QTY=2)	2286065-1
KEYING POSITION	CONTACTS & FILLER PLUGS INCLUDED AND NOT INSTALLED	PART NUMBER

1. CONNECTOR DIMENSIONS ARE PER ARINC 600 SPECIFICATION.
2. CONNECTOR IS SUPPLIED WITH CONTACTS (PER TABLE) NOT INSTALLED.
3. KEYING INSTALLED IN POSITION "01".
   FOR POSITION "00" KEYING HARDWARE SHIPPED UNASSEMBLED.
4. CONNECTOR IS SUPPLIED WITH A DUST COVER INSTALLED FOR SHIPPING.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± -

MATERIAL: SEE TABLE
FINISH: SEE TABLE

DWN	C.C.THOMAS	2-26-14
CHK	W.BERNHART	2-26-14
APVD	W.BERNHART	2-26-14
PRODUCT SPEC	-	
APPLICATION SPEC	-	
WEIGHT		

TE Connectivity

NAME: PLUG ASSY,SIZE 2,ARINC 600 (150/150/13C2) WITH GROUND SPRINGS

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-2286065	-

CUSTOMER DRAWING | SCALE 3:2 | SHEET 1 OF 1 | REV B

4805 (1/15)