
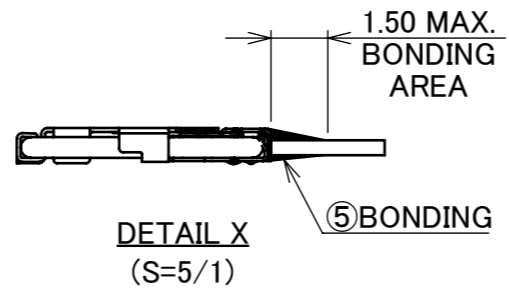
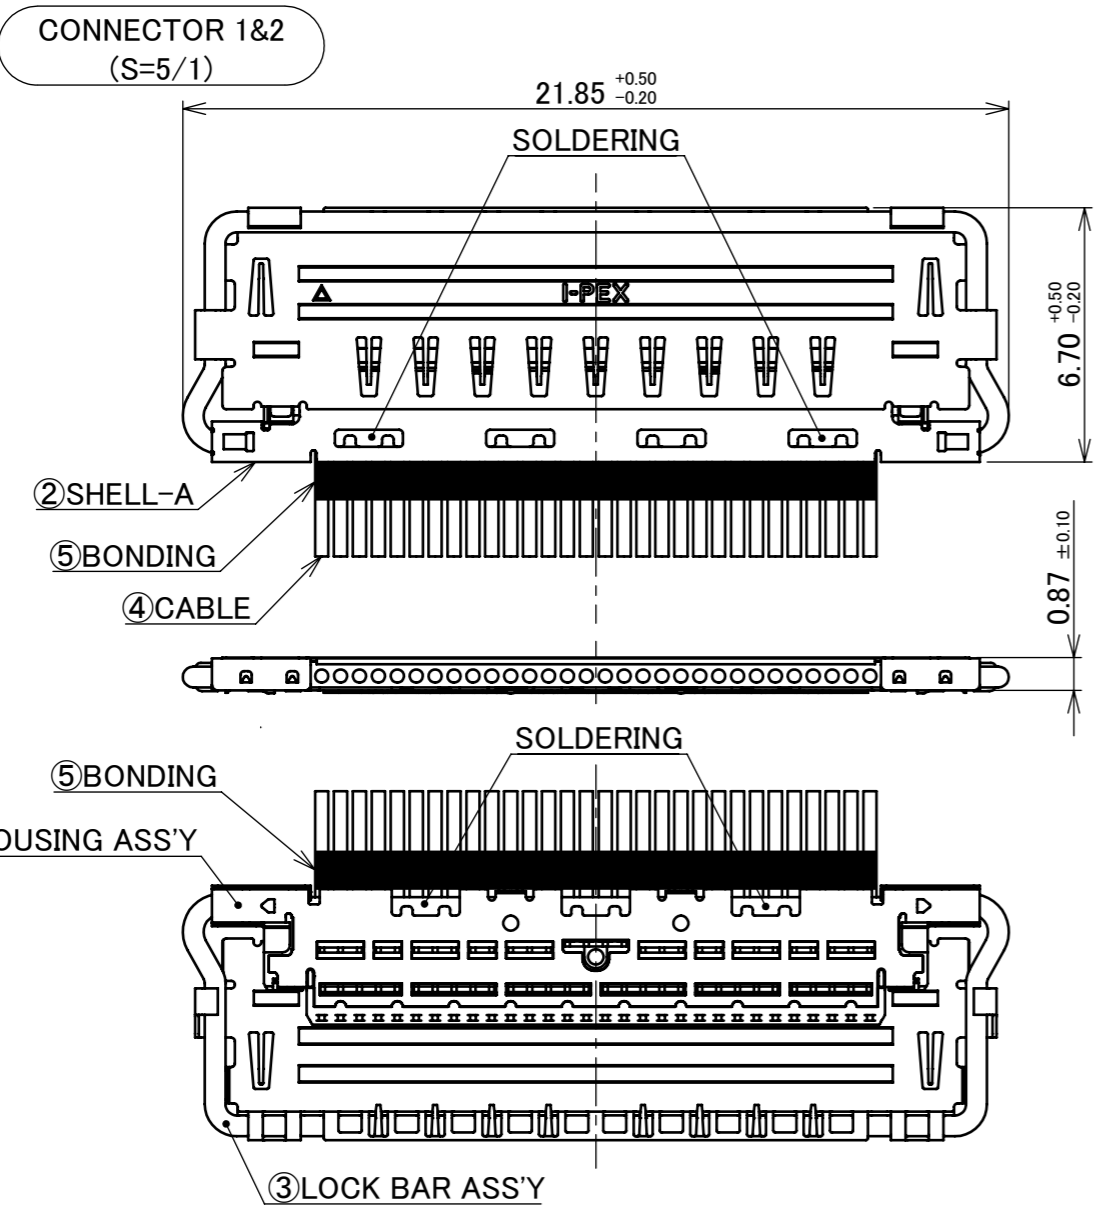


PART No.  
81457-100B-02-D

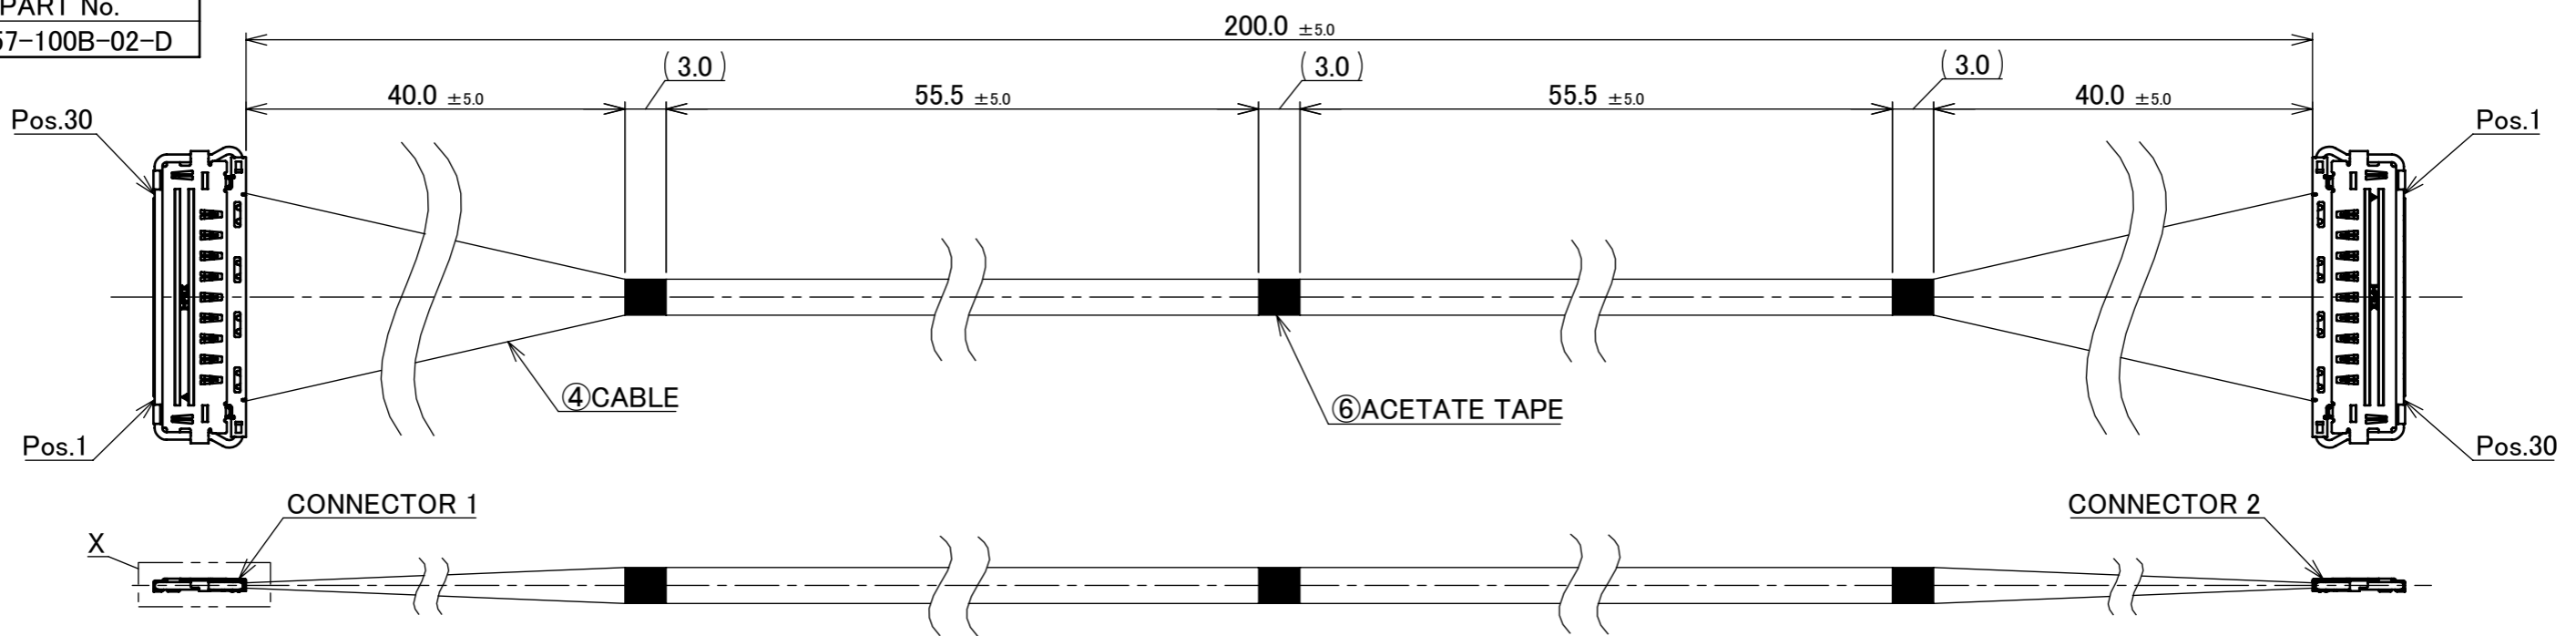

PIN ASSIGNMENT		
CONNECTOR 1	CABLE	CONNECTOR 2
30	MICRO-COAXIAL AWG#40 50 OHM, BLUE	1
29	MICRO-COAXIAL AWG#40 50 OHM, BLUE	2
.	MICRO-COAXIAL AWG#40 50 OHM, BLUE	.
.	MICRO-COAXIAL AWG#40 50 OHM, BLUE	.
2	MICRO-COAXIAL AWG#40 50 OHM, BLUE	29
1	MICRO-COAXIAL AWG#40 50 OHM, BLUE	30

NOTE.  
 1. TO HANDLE THIS CONNECTOR YOU MUST READ AND FOLLOW THE INSTRUCTION MANUAL BELOW. I-PEX INSTRUCTION MANUAL No.HIM-17015.  
 2. ELECTRIC CHARACTERISTICS  
 WITHSTANDVOLTAGE : AC 250V(1SEC.) LEAKAGE CURRENT 2.0mA MAX.  
 INSULATION RESISTANCE : 50MΩ MIN. DC 100V (0.5SEC.)

NO.	DESCRIPTION	PARTS NO.	QTY	REMARKS
6	ACETATE TAPE	-	3	BLACK
5	BONDING	-	-	UV GLUE
4	CABLE	-	30	MICRO-COAXIAL AWG #40 50 OHM, BLUE
3	LOCK BAR ASS'Y	20848-030T-01	2	CONNECTOR 1 & 2
2	SHELL-A	3427-0301	2	CABLIN®-VS II PLUG P/N : 20846-030T-01 CONNECTOR TO BE MATED : 20849-030E-01
1	HOUSING ASS'Y	20847-030T-01	2	

For DIGI-KEY CORPORATION

ANGLE	±2°	6 OVER 30 MAX.	±0.3	PROJECTION ⊕	SERIES No. IH-210016	CUSTOMER COPY
	6 MAX.	±0.2	30 OVER 120 MAX.			
GENERAL TOLERANCE.				TITLE CABLIN®-VS II 30P HARNESS		SCALE 2:1 UNIT mm
DWG.	K.Baba		DATE	2021/05/19		
CHK.	R.Takei					
REV.	ECN	BY	DATE	APP.	DWG. No.	81457
REVISION RECORD				H.Ikari	SIZE	A3
					SHEET	1/1
					REV.	0