

# UC-5100 Series

**Arm-based DIN-rail wireless-enabled industrial computer with 4 serial ports, 2 LANs, 2 CANs, 4 DI/DOs**



- > ARMv7 Cortex-A8 1000 MHz processor
- > Dual auto-sensing 10/100 Mbps Ethernet ports
- > 4 software-selectable RS-232/422/485 ports supporting all signals
- > Dual CAN ports with Industrial CAN 2.0 A/B protocol supported
- > Moxa Industrial Linux with 10-year superior long term support
- > Mini PCIe socket for Wi-Fi/Cellular module
- > Micro SD socket for storage expansion
- > Supports TPM v2.0 (optional)
- > -40 to 85°C wide temperature range and -40 to 70°C with LTE enabled
- > IEC 61000-6-2/6-4 standards for harsh industrial environments



## Introduction

The UC-5100 Series embedded computers are designed for industrial automation applications. The computers feature 4 RS-232/422/485 full signal serial ports with adjustable Pull-High/Pull-Low resistors, dual CAN ports, dual LANs, 4 digital input channels, 4 digital output channels, USB, and a SD socket in a compact, front-end access housing.


To fulfill various industrial applications, the UC-5100 Series computing platform provides models with dual CANopen protocol supported CAN ports and mini PCIe socket for wireless connection featuring a dual SIM design for network redundancy.

The UC-5100's vertical DIN-rail form factor makes it easy to install the computers in a small cabinet. This space-saving solution also facilitates easy wiring, making the UC-5100 a great choice as front-end embedded controllers for industrial applications.


Furthermore, all models are equipped with Moxa Industrial Linux for users to enjoy its superior long term support operating system as well as the optimized software features.

## Appearance


### UC-5101

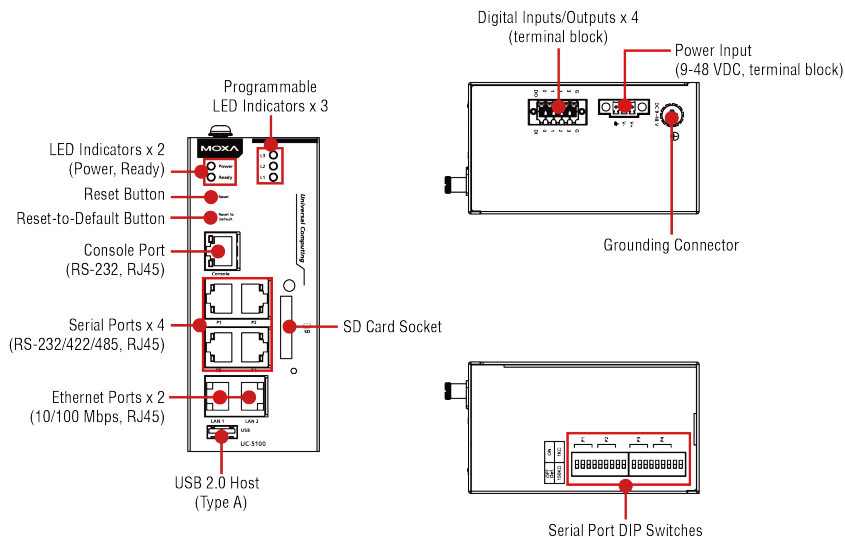


**UC-5102**

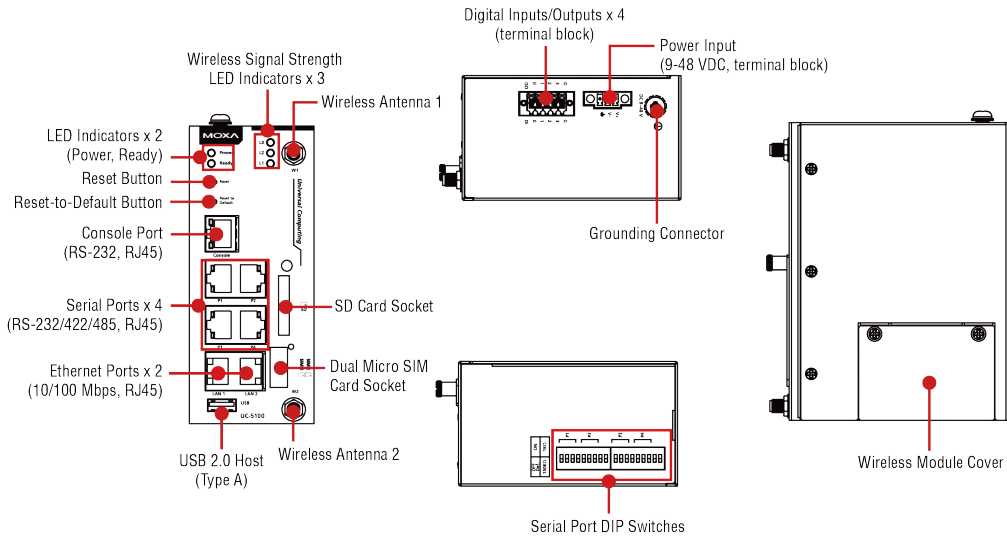


**UC-5111**

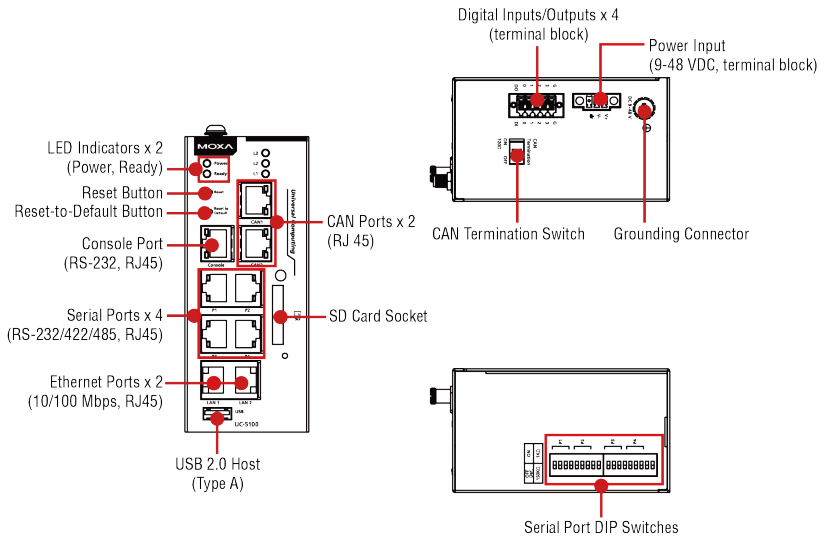

**UC-5112**

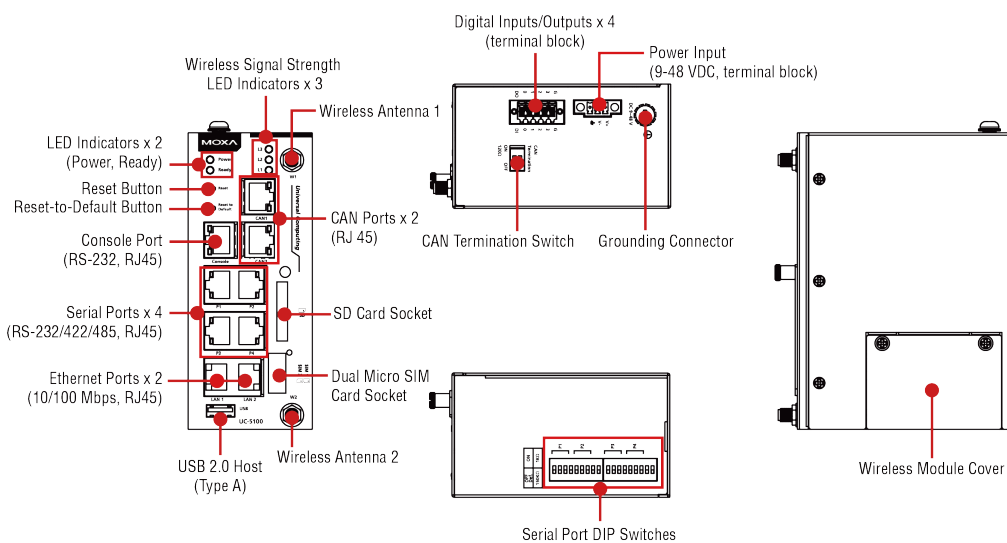

## Dimensions

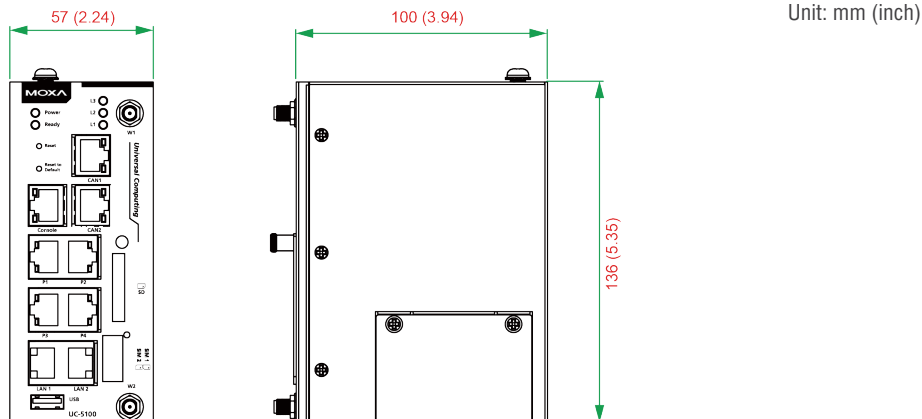

## Hardware Specifications

### Computer

**CPU:** ARMv7 Cortex-A8 1000 MHz

**OS (pre-installed):** Moxa Industrial Linux (Debian 9, Kernel 4.4)

**DRAM:** 512 MB DDR3 SDRAM

**USB:** USB 2.0 hosts x 1, type A connector

### Storage

**Built-in:** 8 GB eMMC flash with OS pre-installed

**Storage Expansion:** SDHC/SDXC socket for storage expansion

### Other Peripherals

**TPM:** v2.0 by request (SPI interface)

### Ethernet Interface

**LAN:** 2 auto-sensing 10/100 Mbps ports (RJ45)

**Magnetic Isolation Protection:** 1.5 kV built-in

### Serial Interface

**Serial Standards:** 4 RS-232/422/485, software selectable port (RJ45)

**Console Port:** RS-232 (TxD, RxD, GND), 4-pin pin header output (115200, n, 8, 1)

### Serial Communication Parameters

**Data Bits:** 5, 6, 7, 8

**Stop Bits:** 1, 1.5, 2

**Parity:** None, Even, Odd, Space, Mark

**Flow Control:** XON/XOFF, ADDC® (automatic data direction control) for RS-485

**Baudrate:** 300 bps to 921.6 kbps

### Serial Signals

**RS-232:** TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND

**RS-422:** TxD+, TxD-, RxD+, RxD-, GND

**RS-485-4w:** TxD+, TxD-, RxD+, RxD-, GND

**RS-485-2w:** Data+, Data-, GND

### Digital Input

**Input Channels:** DI x 4

**Input Voltage:**

- Logic 0: 0 to 0.8 V
- Logic 1: 2.0 to 5.5 V

### Digital Output

**Output Channels:** DO x 4

**Output Current:** 24 mA

**Output Voltage:**

- Logic 0: 0 to 0.55 V
- Logic 1: 2.5 to 3.3 V

### LEDs

**System:** Power x 1, Ready x 1

**LAN:** LED located on the RJ45 connector, 10M/Link x 1, 100M/Link x 1

**Serial:** TxD x 1, RxD x 1

**Signal Strength / Programmable:** L1, L2, L3 (LEDs located on the RJ45 connector)

### Switches and Buttons

**Push Button:** Initially configured to reboot and to reset the device to factory defaults

**Dip Switch:** For configuring the serial port Pull-High/Pull-Low resistors and CAN port termination

### Physical Characteristics

**Housing:** SECC + AI 5052

**Weight:** 600 g (1.32 lb)

**Dimensions:** 57 x 136 x 100 mm (2.24 x 5.35 x 3.94 in)

**Mounting:** DIN rail, wall (with optional kit)

### Environmental Limits

**Operating Temperature:**

Standard Models: -10 to 60°C (14 to 140°F)

Wide Temp. Models:

- Product only: -40 to 85°C (-40 to 185°F)
- With LTE accessory: -40 to 70°C (-40 to 158°F)
- With WiFi accessory: -10 to 70°C (14 to 158°F)

**Storage Temperature:**

Standard Models: -20 to 70 °C (-4 to 158°F)

Wide Temp. Models: -40 to 85°C (-40 to 185°F)

**Ambient Relative Humidity:** 5 to 95% (non-condensing)

**Anti-Vibration:** 2 Grms @ IEC 60068-2-64, random wave, 5-500 Hz, 1 hr per axis (without any USB devices attached)

**Anti-Shock:** 20 g @ IEC 60068-2-27, half sine wave, 11 ms

### Power Requirements

**Input Voltage:** 9 to 48 VDC (3-pin terminal block, V+, V-, SG)

**Input Current:** 0.95 to 0.23 A

**Power Consumption:** 6 W (without cellular module and external USB device attached)

### Standards and Certifications

**Safety:** UL 60950-1, IEC 60950-1, EN 60950-1

**EMC:** EN 55032/24, EN 61000-6-2/6-4, RCM, VCCI, EAC

**EMI:** CISPR 32, FCC Part 15B Class A

**EMS:**

IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV

IEC 61000-4-3 RS: 10 V/m

IEC 61000-4-4 EFT: Power: 2 kV; Signal: 1 kV

IEC 61000-4-5 Surge: Power: 2 kV; Power: 0.5 kV; Signal: 1 kV

IEC 61000-4-6 CS: 10 V

IEC 61000-4-8

**Green Product:** RoHS, CRoHS, WEEE

### Reliability

**Alert Tools:** External RTC (real-time clock)

**Automatic Reboot Trigger:** External WDT (watchdog timer)

### Warranty

**Warranty Period:** 5 years

**Details:** See [www.moxa.com/warranty](http://www.moxa.com/warranty)

## Software Specifications

### Linux

**OS:** Moxa Industrial Linux (Debian 9)

**Kernel:** GNU/Linux 4.4 CIP

**System Shell:** DASH (default), BASH

**Text Editor:** vim, nano

**File System:** JFFS2, NFS, Ext3, Ext4, VFAT, OverlayFS, NTFS

**Internet Protocol Suite:** TCP, UDP, IPv4, IPv6, SNMPv2, v3, ICMP, ARP, HTTP, CHAP, PAP, DHCP, NTP, NFS, SSH, PPP, SFTP, RSYNC, SSL, SCP

**Programming Language Support:** PHP, Perl, Python

**Internet Security Suite:** OpenVPN, Netfilter/iptables, IPsec

**Cryptographic Hardware Accelerators:** AES, SHA, OpenSSL, random generator

**Web Server (Apache):** Allows you to create and manage web sites; supports PHP and XML

**Terminal Server (SSH):** Provides secure encrypted communications between two untrusted hosts over an insecure network

**Cellular Networking:**

- WVDIAL: Point-to-Point Protocol dialer that dials a modem and starts pppd to connect to the Internet
- QMI (Qualcomm MSM Interface): Glib-based library for talking to WWAN modems and devices that speak the Qualcomm MSM Interface (QMI) protocol
- Modem Manager
- Cellular Management Utility
- Wi-Fi Management Utility

### Application Development Software:

- Toolchain ARM GNUeabi6.3
- GNU C/C++ cross-compiler
- GNU C library
- GDB source-level debugging server

### Moxa Industrial Linux

**Long-Term Support:** Moxa Industrial Linux allows users to keep the same kernel version and Debian user space without needing to upgrade the entire system frequently. In addition, subscription services for each major release of Moxa Industrial Linux, throughout its 10-year life-cycle phase, provide security updates and bug fixes.

**Robust File system:** The OverlayFS robust file system integrated into Moxa Industrial Linux provides extra protection during firmware upgrades and downgrades.

### Cybersecurity:

- Moxa Industrial Linux comes with a built-in utility that helps developers implement a cybersecurity protection mechanism based on IEC 62443-4-2 international standards.
- Security Update of Existing Software Packages: All software packages installed on the UC-5100 Series can be automatically updated using Debian Linux's Advanced Packaging Tool (APT) server or Moxa's server

**Real COM Mode:** Support NPort's Real COM mode driver to communicate with NPort device servers

## Ordering Information

Model	CPU	RAM	Storage	Ethernet	Serial	CAN	microSD	USB	Mini PCIe	Operating Temperature
UC-5101-LX	1 GHz	512 MB	8 GB	2	4	–	1	1	–	-10 to 60°C
UC-5102-LX	1 GHz	512 MB	8 GB	2	4	–	1	1	1 (dual sim socket)	-10 to 60°C
UC-5111-LX	1 GHz	512 MB	8 GB	2	4	2	1	1	–	-10 to 60°C
UC-5112-LX	1 GHz	512 MB	8 GB	2	4	2	1	1	1 (dual sim socket)	-10 to 60°C
UC-5101-T-LX	1 GHz	512 MB	8 GB	2	4	–	1	1	–	-40 to 85°C
UC-5102-T-LX	1 GHz	512 MB	8 GB	2	4	–	1	1	1 (dual sim socket)	-40 to 85°C
UC-5111-T-LX	1 GHz	512 MB	8 GB	2	4	2	1	1	–	-40 to 85°C
UC-5112-T-LX	1 GHz	512 MB	8 GB	2	4	2	1	1	1 (dual sim socket)	-40 to 85°C

## Optional Accessories (can be purchased separately)

### Power Adapters, Power Cords

Model Name	Package Contents	Description
PWR-24270-DT-S1	• 1 x Power adapter	Power adapter for testing and system development indoors under ambient temperature conditions (input: 100 to 240 VAC, 50 to 60 Hz, 1.5 A; output: 24 VDC, 2.7 A, 60 W)
PWC-C7US-2B-183	• 1 x Power cord	10 A/125 V North American (US) power cord, 183 cm
PWC-C7EU-2B-183	• 1 x Power Cord	10 A/250 V Continental European (EU) power cord, 183 cm
PWC-C7UK-2B-183	• 1 x Power Cord	10 A/250 V United Kingdom (UK) power cord, 183 cm
PWC-C7AU-2B-183	• 1 x Power Cord	2.5 A/250 V Australian (AU) power cord, 183 cm
PWC-C7CN-2B-183	• 1 x Power Cord	10 A/250 V China (CN) power cord, 183 cm

## Wireless Packages

Model Name	Package Contents	Description
UC-LTE-CAT1-EU	<ul style="list-style-type: none"> <li>1 x Cellular module</li> <li>2 x Mini PCI/e mount screw sets</li> </ul>	LTE regions: Asia, Europe Penta-Band LTE: Bands 1, 3, 8, 20, 28* (700*, 800, 900, 1800, 2100 MHz), Dual-Band GSM 900 and 1800 MHz
UC-LTE-CAT1-AUS	<ul style="list-style-type: none"> <li>1 x Cellular module</li> <li>2 x Mini PCI/e mount screw set</li> </ul>	LTE regions: Australia, New Zealand Quad-Band LTE: Bands 3, 5, 8, 28 (1800, 850, 900, 700 MHz), Tri-Band UMTS: Bands 1, 5, 8 (WCDMA/FDD 2100, 850, 900 MHz)
UC-LTE-CAT4-CN	<ul style="list-style-type: none"> <li>1 x Cellular module</li> <li>2 x Mini PCI/e mount screw set</li> </ul>	LTE(FDD): B1,B3,B8; LTE(TDD): B39,B40,B41(38), all bands with diversity DC-HSPA+: B1,B9,B5,B8; TDS: B34, B39, all bands with diversity GSM: 1800/900MHz
UC-WiFi-USB	<ul style="list-style-type: none"> <li>1 x WiFi module</li> <li>2 x Mini PCI/e mount screw set</li> </ul>	Operating Frequency: 802.11 ac/a/b/g/n ISM Band 2.412 GHz to 2.472 GHz, 5.180 MHz to 5.825 MHz (Subject to local regulations) Modulation: 802.11b: DSSS (DBPSK, DQPSK, CCK) 802.11a/g: OFDM (BPSK, QPSK, 16-QAM, 64-QAM) 802.11n: OFDM (BPSK, QPSK, 16-QAM, 64-QAM) 802.11ac: OFDM (BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM)

## Antennas and Internal Antenna Cables

Model Name	Package Contents	Description
ANT-WDB-ARM-0202 plus ADP	<ul style="list-style-type: none"> <li>1 x WiFi antenna</li> <li>1 x SMA adapter</li> </ul>	1.8/1.8 dBi, RP-SMA (male) antenna with 1 SMA adapter
ANT-LTE-OSM-03-3m BK	<ul style="list-style-type: none"> <li>1 x LTE antenna</li> </ul>	Multi-band antenna that covers 700-2700 MHz. Specially designed for 2G, 3G, and 4G applications. Magnetic mounting is available.
ANT-LTE-ASM-04 BK	<ul style="list-style-type: none"> <li>1 x LTE antenna</li> </ul>	LTE Stick antenna that covers 704-960/1710-2620 MHz providing omnidirectional radiation with a gain of 4.5 dBi.
ANT-LTE-ASM-05 BK	<ul style="list-style-type: none"> <li>1 x LTE antenna</li> </ul>	LTE stick antenna that covers 704-960/1710-2620 MHz with a gain of 5 dBi.
ANT-LTE-OSM-06-3m BK MIMO	<ul style="list-style-type: none"> <li>1 x LTE antenna</li> </ul>	Multi-band antenna that covers 700-2700/2400-2500/5150-5850 MHz frequencies. Screw-fastened mounting and full IP67 waterproofing are available.
SMA-Adapter	<ul style="list-style-type: none"> <li>1 x SMA adapter</li> </ul>	SMA Adapter to convert to SMA male connector

## Mounting Kits

Model Name	Package Contents	Description
DK-UC-5000	<ul style="list-style-type: none"> <li>DIN-rail Mounting kit x 1</li> <li>Screws x 4</li> </ul>	DIN-rail Mounting kit with screws
WM-UC-5000	<ul style="list-style-type: none"> <li>Wall Mounting kit x 2</li> <li>Screws x 4</li> </ul>	Wall Mounting kit with screws

### Package Checklist

- UC-5100 embedded computer
- Power jack
- Console cable
- Quick installation guide (printed)
- Warranty card