



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
H1		REVISED PER ECO-11-005027	11MAR11	RK	HMR
H2		REVISED PER ECO-17-008806	19FEB2018	RS	DR

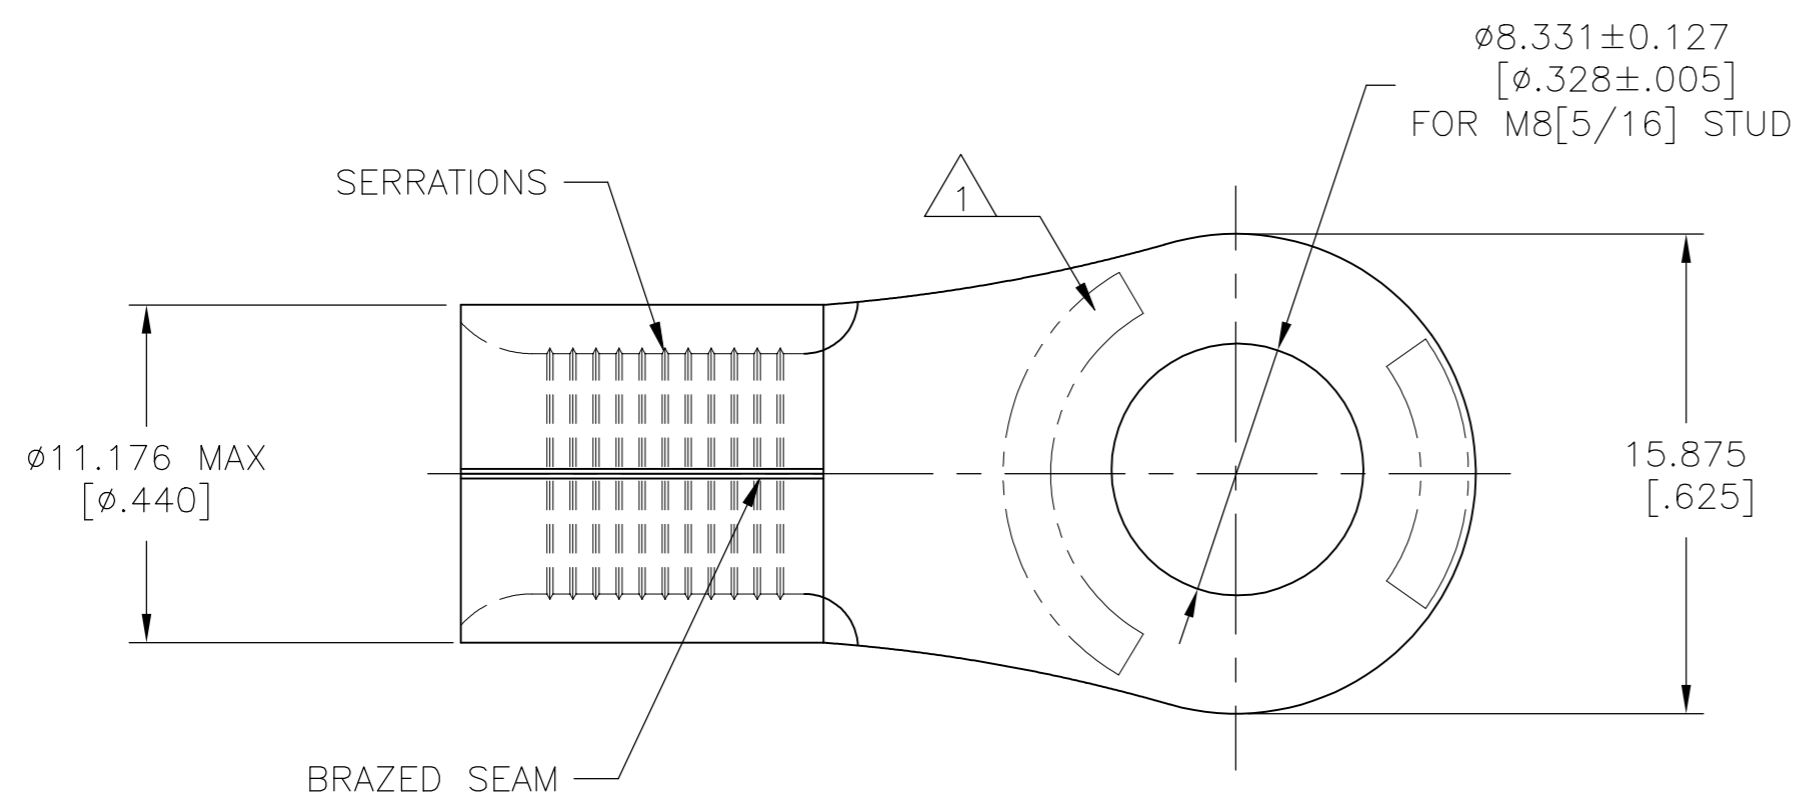

<b>AMP</b> WIRE RANGE	Listed
4 AWG SOLID OR STRANDED	4 AWG STRANDED
LR7189 Certified	MILITARY P/N AND CLASS
4 AWG SOLID OR STRANDED	MS20659-132 CLASS 2

- STAMP AMP 4W\* 40-50  
LOCATED APPROX AS SHOWN
- UL 486 A-B OR SAE AS7928

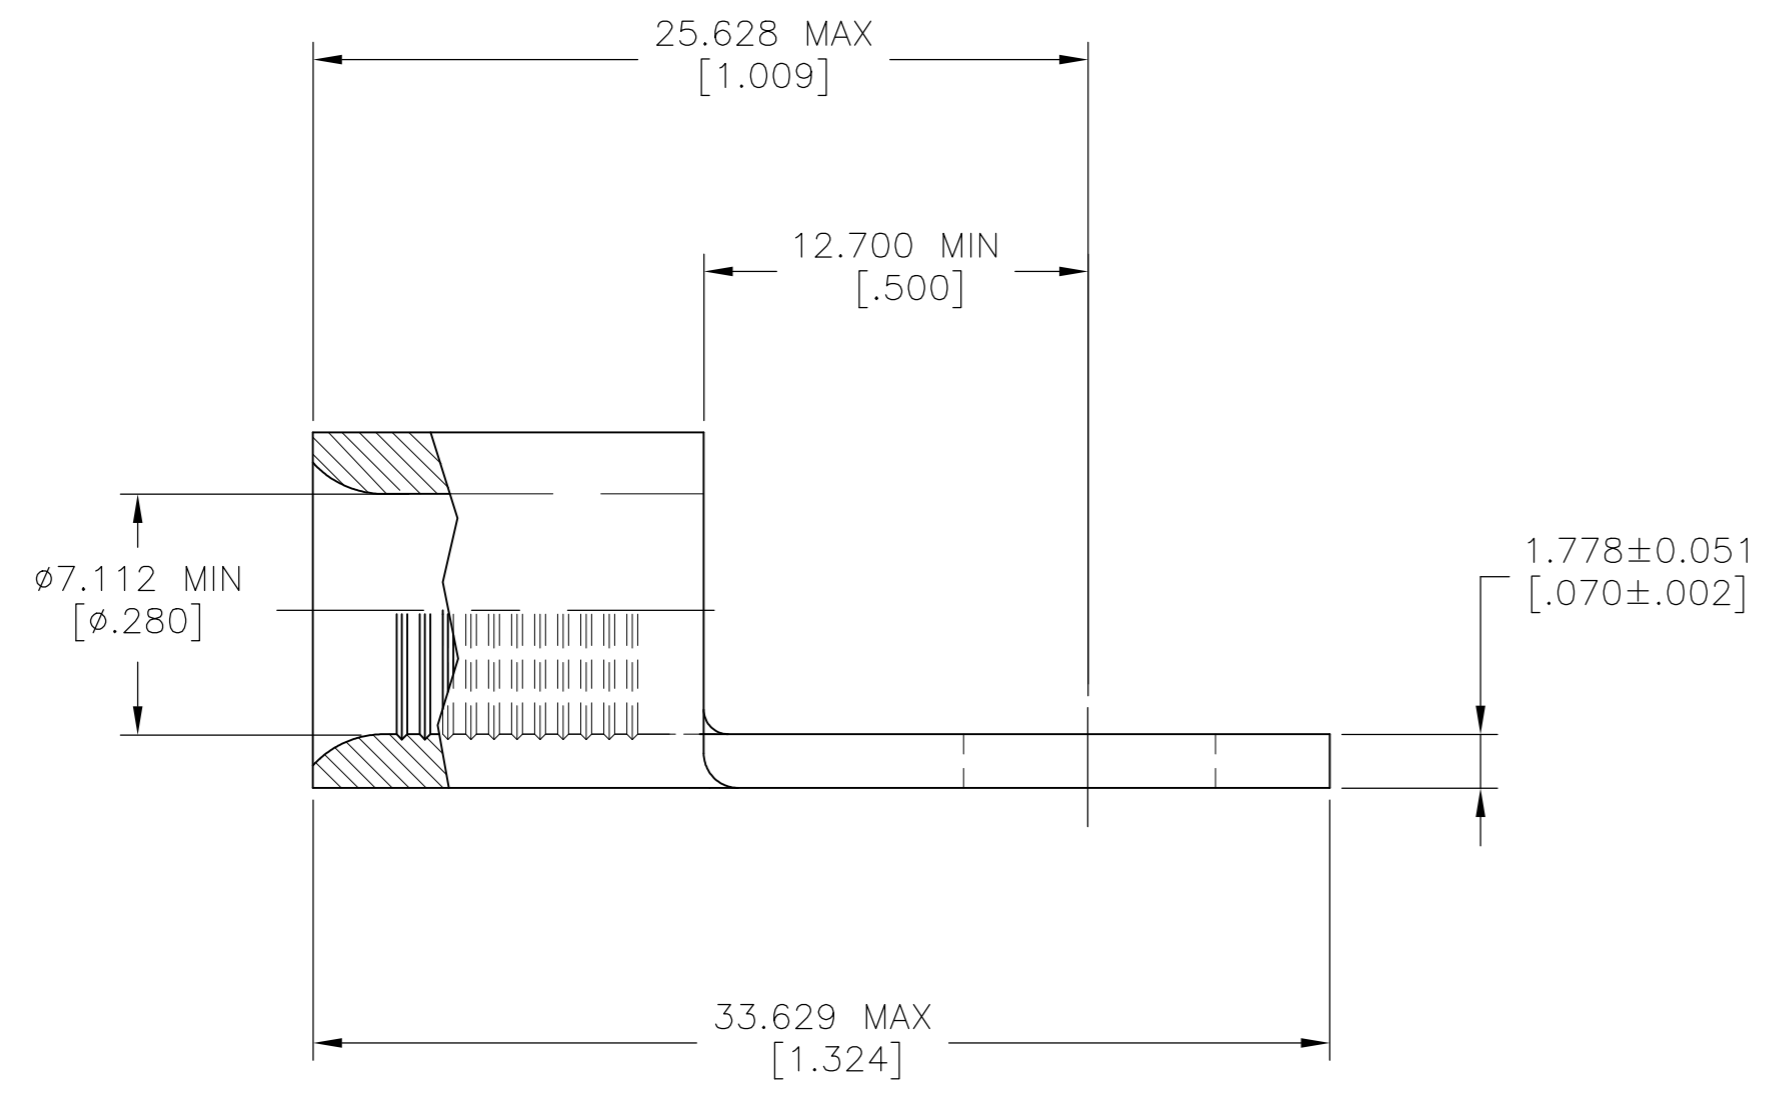

<b>AMP INCORPORATED CUSTOMER SERVICE SYSTEMS</b>		MAX RECOMMENDED OPERATING TEMPERATURE: 170° C [338°F] MAX
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	VOLTAGE RATING: NOT APPLICABLE
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	WIRE CROSS SECTIONAL AREA RANGE: 16.8-26.7MM <sup>2</sup> [33,100-52,600] CIR MILS SOLID OR STRANDED
FOR ORDER ENTRY	1-800-526-5142	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN TA BRINKMAN 3-29-93	100	LOOSE PIECE	33115
DIMENSIONS: mm [INCHES]		CHK DA PATTERSON 3-29-93	QTY	PACKAGE TYPE	PART NUMBER
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± 0.127[.005] 4 PLC ± - ANGLES ± -		APVD DE MILLER 3-29-93	TE Connectivity Ltd.		
MATERIAL COPPER PER ASTM B-152 ANNEALED		PRODUCT SPEC 	NAME TERMINAL, RING, TONGUE, SOLISTRAND™ 4 AWG		
FINISH TIN PLATE 0.00254[.000100] MIN THK PER ASTM B545		WEIGHT	SIZE A2	CAGE CODE 00779	DRAWING NO C=33115
CUSTOMER DRAWING			RESTRICTED TO	SCALE 4:1	SHEET 1 of 1
			REV H2		