

Ŧ	Ω (П	m	D	C C



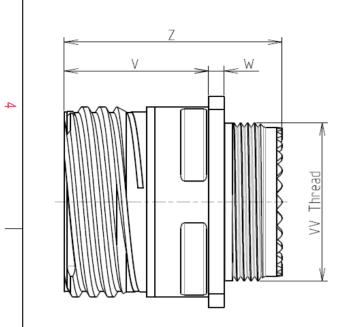



LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 17

PLATING : F = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ω

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Aluminium			
	-Shell Plating	: Nickel			
N	-Insulator	: Thermoplastic			
	-Contacts	: Copper Alloy			
	-Seals & Grommet	: Silicon Elastomer			
	-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
	-Durability	: 500 Mating cycles			
	-Delivered with Souriau contacts and Accessories				
	-Temperature Range	: -65°C to +200°C			
	-Salt Spray	: 48 hours			
	-Mass	: 33.62 g ± 10%			

8D 0

G

17

-

F

75


А


F

В

Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	26.97
R2	24.61
S	33.3±0.3
V	20.83+0/-1.25
W	2.1/2.5
Z	31.5 Max
VV THREAD	M25x1-6g

Е



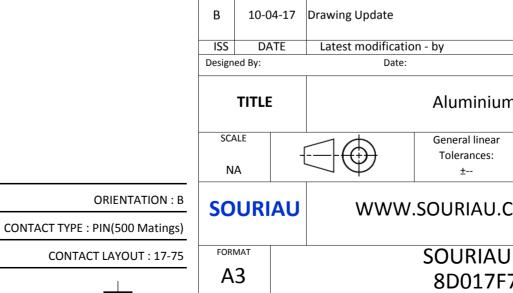

С

D

σ		Þ		
	0			4
AS EXAMPLE				3
r any non-conformin s which does not co er of the Parties or I ndation, technical n untry Jurisc FR	mply with by a third par			0
.7F75AB	Not Listed			2
			MOD N°	
um Receptac		R DRAWING ES		
ar :		^r project 59		1
J.COM	This document is the property of			
U DRG N° 775AB-C			SHEET 1/2	
В		А		J

ſ	Ŧ	G	г п	m	D	0	
		Contact Layout					Panel Cuto
4		75			ħ Ez	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
	Ctc A B	2#8 Triax 17-75 X Y 0 4.75 0 -4.75			¥.	Max. thickness panel for receptacle: Typ	Ø⊺ vpe 0: front m
ى	5	0 4.75				Dim ØA ØAA R1 ØT	
	+					SOURIAU shall not be li	
N						due to a use of the P the Specifications issued I (professional rec	by either
					B 10-04-	PN: 8	
					ISS DAT Designed By: TITLE	Date:	uminiu
<u> </u>					SCALE		eral linear lerances: ±
					FORMAT A3	SOU	RIAU. URIAU 2017F
l	Н	G	F	E	D		

