

TTL/CMOS FULL-SIZE DIP VOLTAGE CONTROLLED CRYSTAL OSCILLATOR

ACVX1220



RoHS Compliant



20.2 x 12.6 x 8.0mm

FEATURES:

- Large frequency pulling available
- Hermetically sealed
- Tight Symmetry Available

APPLICATIONS:

- Phase locked loops (PLLs)
- Clock recovery
- Synthesizers
- Reference signal tracking

STANDARD SPECIFICATIONS:

PARAMETERS

ABRACON P/N	ACVX1220 Series
Frequency Range	1.0MHz to 160.0MHz
Operating Temperature	0°C to + 70°C (see options)
Storage Temperature	-40°C to + 85°C
Freq. Stability vs. Temperature	± 100ppm max. (see options)
Freq. Stability vs. Aging	± 5ppm/yr max.
Freq. Stability vs. Supply Volt.	± 5ppm max.
Supply Voltage (Vdd)	5.0 Vdc ±5%
Supply Current (Idd)	See Table 1
Symmetry	40/60% max. @ 1/2 Vdd (see option)
Rise & Fall Time (Tr/Tf)	10ns max.
Output Load	TTL/CMOS (15pF or 5TTL gate)
Output Voltage	VOH=0.9*Vdd min. ; VOL=0.4*Vdd max.
Transfer Function	Positive
Control Voltage (Vc)	0.5Vdc to 4.5Vdc
Center Voltage	2.5 VDC ±0.5V
Frequency Deviation	± 100ppm min. (see options)
Linearity	± 10% max.
Start-up Time	10ms. max.


Table 1

Freq MHz	Idd max. mA
≤24	25
≤45	30
≤70	60
≤160	90

OPTIONS & PART IDENTIFICATION:

(Left blank if standard)

ACVX1220 - Frequency - □ - □ - □ - □ - □

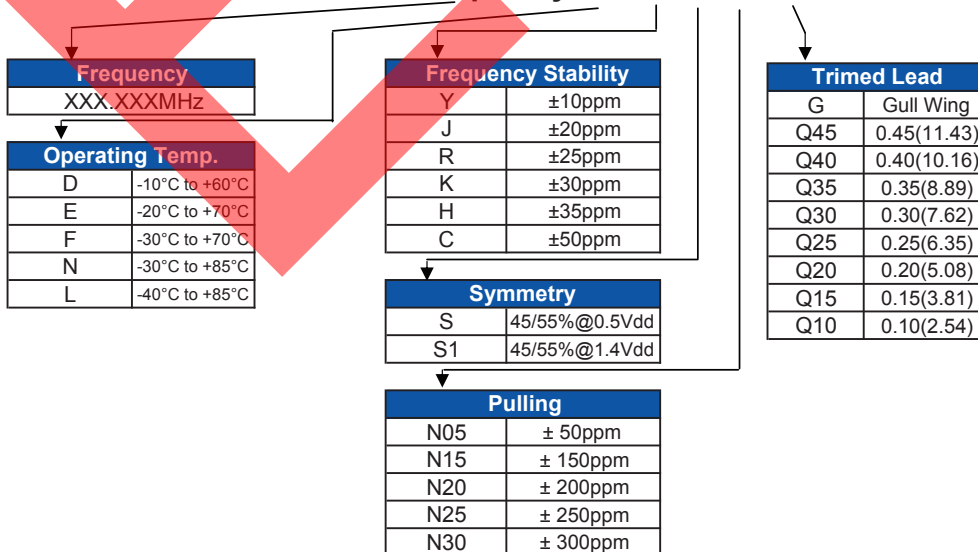

ABRACON IS
ISO 9001 / QS 9000
CERTIFIED



ABRACON
CORPORATION

Visit www.abracon.com for Terms & Conditions of Sale **Revised: 12.03.07**
30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000 | fax 949-546-8001 | www.abracon.com

TTL/CMOS FULL-SIZE DIP VOLTAGE CONTROLLED CRYSTAL OSCILLATOR

ACVX1220




RoHS
Compliant



20.2 x 12.6 x 8.0mm

OUTLINE DRAWING:

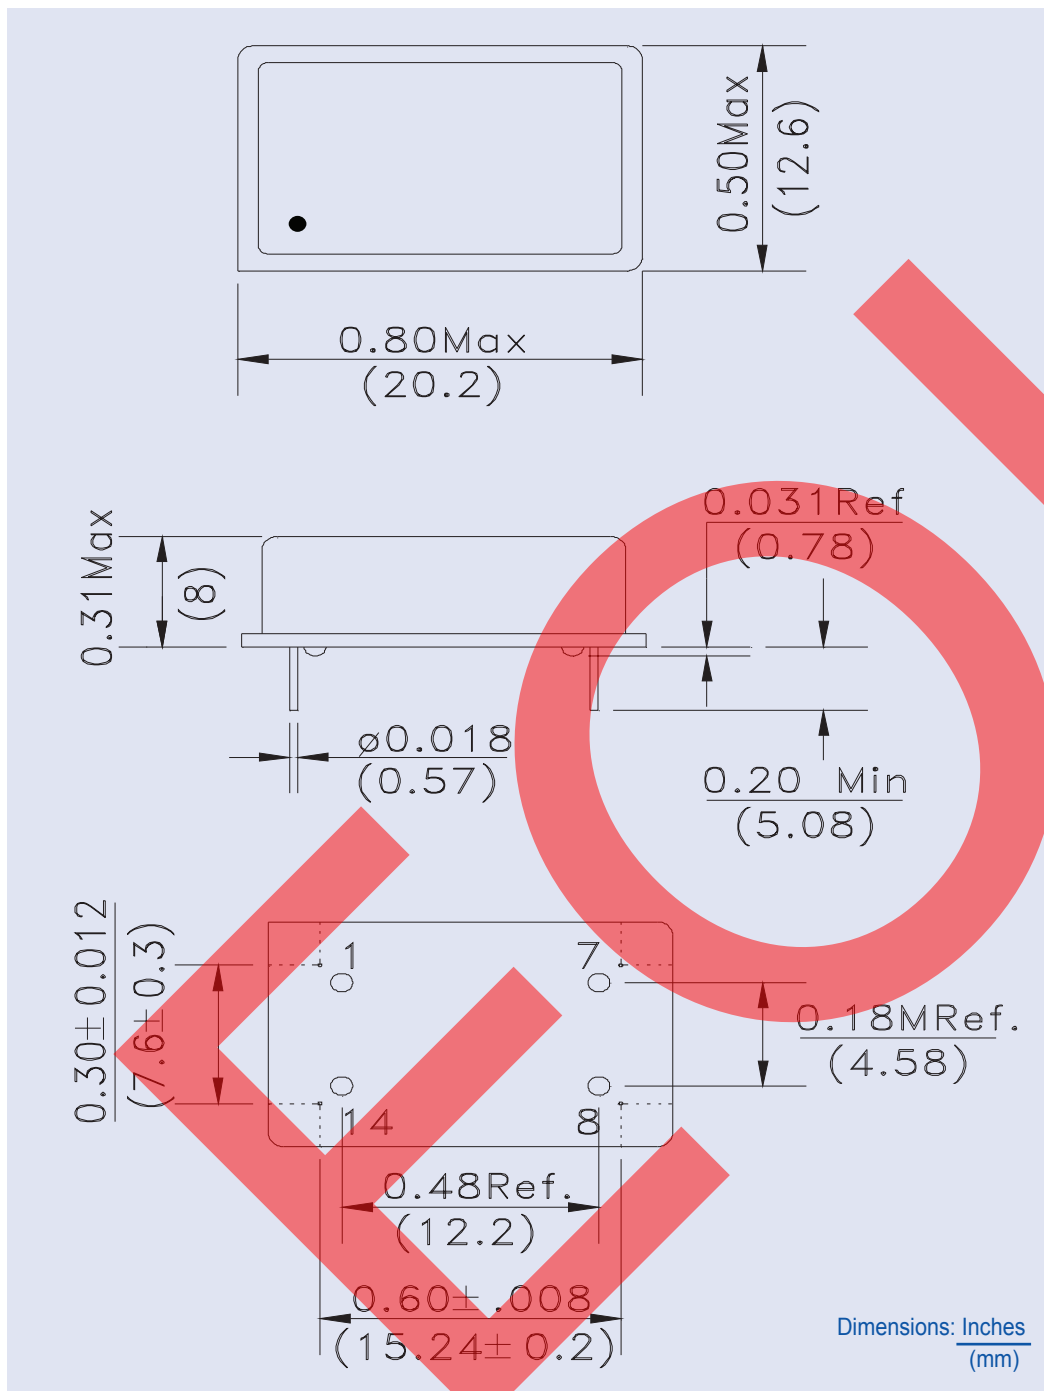

PIN	FUNCTION
1	Vc
7	GND/Case
8	Output
14	VDD

Note: It is recommended to use an approximately 0.01uF bypass capacitor between PIN 7 and 14.