


**Note for plug:**

- Material:**  
 Housing-Polycarbonate,clear.  
 Terminal-0.36[.014] thick phosphor bronze.  
 Thick gold in localized gold plate.  
 Area,Gold flash over the remainder.  
 Over 2.54mm[.000100] thick nickel underplate.
- ① Conductor: [26AWG(0.12x12) BARE COPPER]x6C.
  - ① Insulation: (PP6331 ID:0.95-1.0)x6C.
  - ① Jacket: PVC NOUL 80P.
  - ① Package: Individual PE Bag.

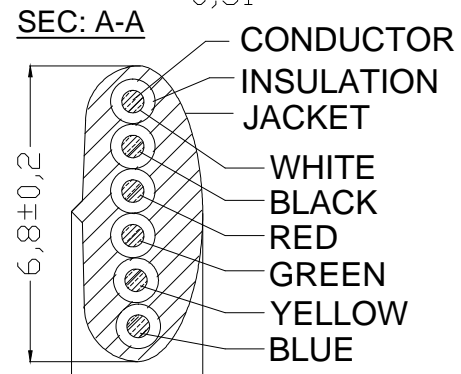

**TERMINATION**

P1		P2
1	White	6
2	Black	5
3	Red	4
4	Green	3
5	Yellow	2
6	Blue	1

Order code: AT-C-26-6/6/X-XX  
 Order color:  
 B: Black  
 W: White  
 S: Silver

Length Code	Retracted Length(L3)	Extended Length(L2)	Cut Length(L1)
5	540±50	5.0FT-5.75FT	2600-2700
7	740±50	7.0FT-8.05FT	3700-3900
10	1000±50	10.0FT-11.5FT	5000-5200
12	1300±50	12.0FT-13.8FT	6400-6600
14	1350±50	14.0FT-16.1FT	6900-7100

**RoHS compliant**  
 Unit: mm

Scale	Free					Date	Name	Customer-No.
TOLERANCE						Drawn	18.12.2017	Amy
.x	±0.50					Approved	08.05.2019	Amy
.xx	±0.20	②	Remove the retracted length 3.4m	23.06.2021	Luca			ASSMANN WSW-No. <b>AT-C-26-6/6/X-XX</b>
DIM	TOL	①	Update the notes, and add the cut length	08.05.2019	Segal			Drawing-No. <b>ASS 8162 CA</b>
		①	Drawn	18.12.2017	Amy	<b>ASSMANN</b> WSW components		rev02
Angle	±2°	Id.	Modification	Date	Name			Replace

