



Electrical Specifications

Center Frequency: 4000 MHz
Bandwidth: 400 MHz
Passband: 3800-4200 MHz
Insertion Loss in BW: 2.5 dB Max
VSWR: 2.10:1 Max
Ripple in BW: 0.4 dB Max
Attenuation: >30 dB @ DC-3000 MHz
 >20 dB @ 3000-3600 MHz
 >20 dB @ 4500-4800 MHz
 >40 dB @ 4800-6000 MHz
Input Power: 3 Watt Max
Impedance: 50 Ω


Mechanical

Mounting Method: SMT
Dimensions: 26.5 x 14.0 x 5.5 mm

Environmental

Operating Temperature: -40 to +85° C
Storage Temperature: -50 to +95° C

Outline Drawing:

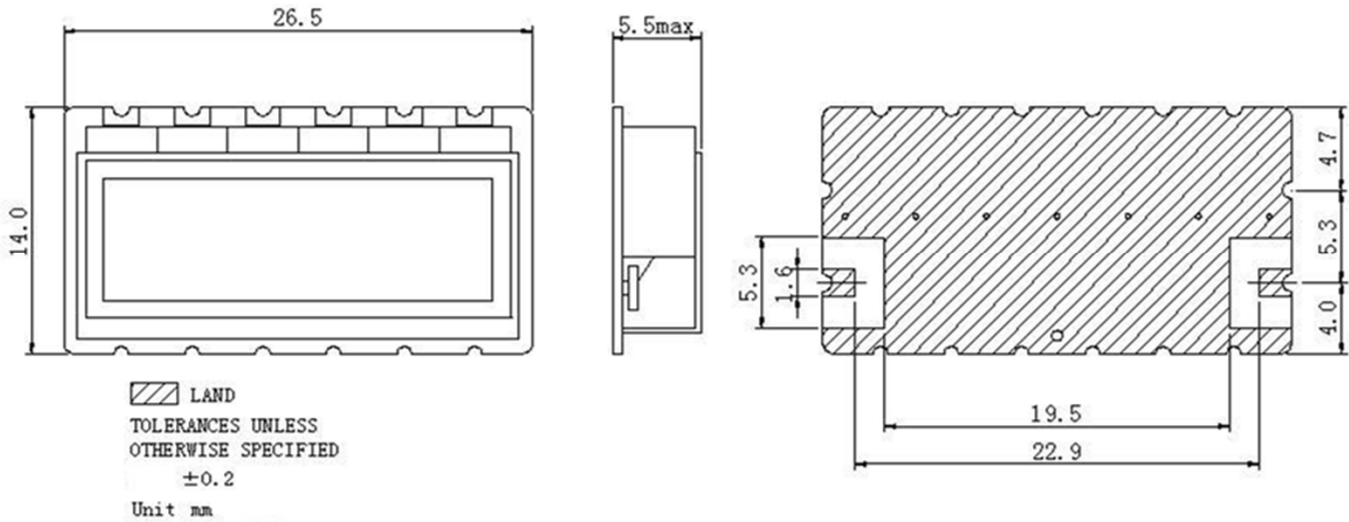



Response Plot:

