


Isometric view  
Scale: 1:1

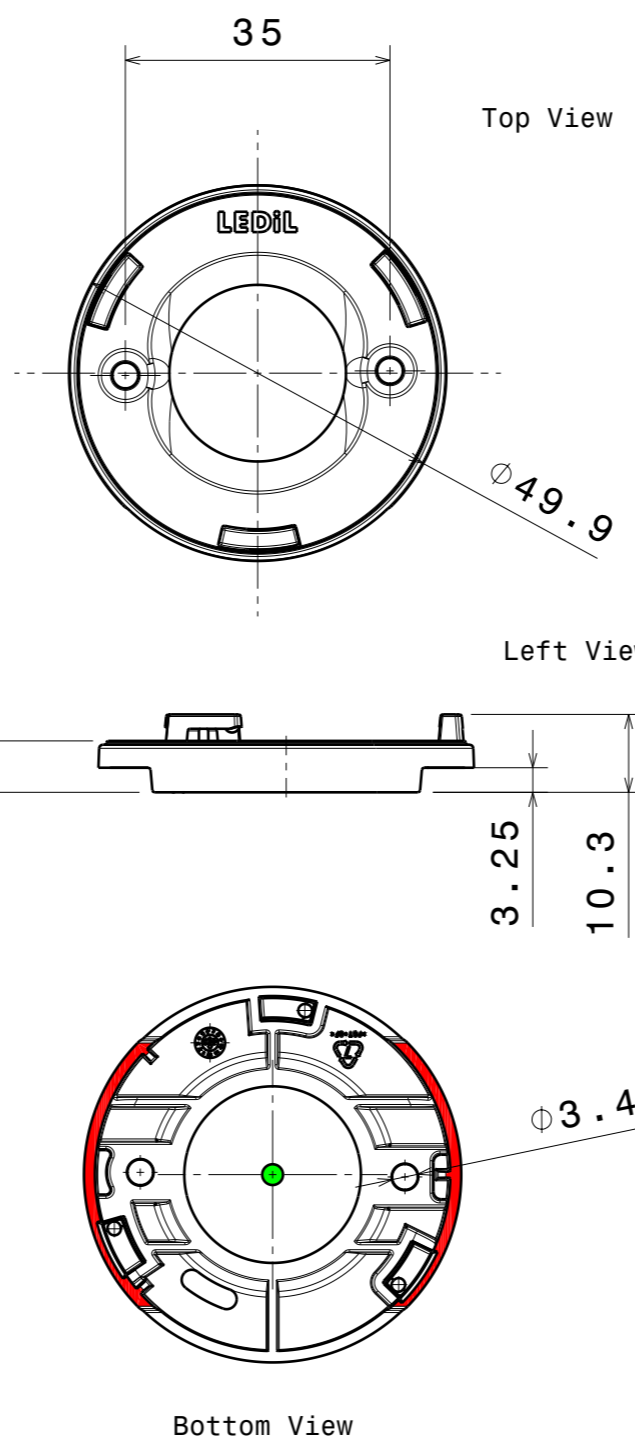

Compatible with the following optics:

|                           |                      |
|---------------------------|----------------------|
| F13379_ANGELA-S           | FN15679_RONDA-S      |
| F13380_ANGELA-M           | FN15552_RONDA-W      |
| F13381_ANGELA-W           | FN15387_RONDA-WW     |
| F13840_ANGELA-XW          | FN15381_RONDA-WWW    |
| F13325_ANGELINA-S         | FN15622_RONDA-REC-60 |
| F13401_ANGELINA-M         | FN15789_RONDA-REC-90 |
| F13402_ANGELINA-W         | FN15380_RONDA-WAS    |
| F13838_ANGELINA-XW        | FN15977_RONDA-WAS2   |
| F14532_ANGELETTE-S        | FN15388_RONDA-ZT45   |
| F14533_ANGELETTE-M        | C15800_MOLLY-S       |
| F16010_ANGELETTE-M2       | C15801_MOLLY-M       |
| F14534_ANGELETTE-WW       | C15802_MOLLY-W       |
| F14619_ANGELETTE-S-PLAIN  |                      |
| F14620_ANGELETTE-M-PLAIN  |                      |
| F16011_ANGELETTE-M2-PLAIN |                      |
| F14622_ANGELETTE-WW-PLAIN |                      |
| C14346_ANGELETTE-WAS      |                      |

| PART               | TYPE   | MATERIAL | COLOR / COATING |
|--------------------|--------|----------|-----------------|
| C16685_CLAMP-PRV-A | HOLDER | PBT      | WHITE           |

|  |                             |   |
|--|-----------------------------|---|
| <b>MECHANICAL DRAWING</b>  |                             | <b>LEDiL®</b>   |
| PRODUCT<br><b>C16685_CLAMP-PRV-A</b>   |                             |   |
| Plastic moulding general tolerances according to DIN 16901-130 and applies if not otherwise shown in the drawing. Silicone moulding general tolerances according to ISO 3302-1 Class M3 and applies if not otherwise shown in the drawing. | FIRST ANGLE PROJECTION:<br> | This drawing is the property of LEDiL Oy. It may not be copied or otherwise distributed without prior written permission from LEDiL Oy. |
| SCALE 1:1  | WEIGHT 4.7 g                | A3 SHEET 1/1  |

Notes

|   |   |
|---|---|
| ● | Fits with OSRAM PrevaLED Core G7 L15 H1 connectors  |
| ● | Countersunk head screw, M3, moment 0.6Nm  |
| ● | PCB or heatsink level.  |
| ● | LED location  |
|   | Ensure LED fitting from a product specific 3D model available from <a href="http://www.ledil.com">www.ledil.com</a>         |
|   | For more details about installation please see LEDiL Installation Guide on <a href="http://www.ledil.com">www.ledil.com</a> |