
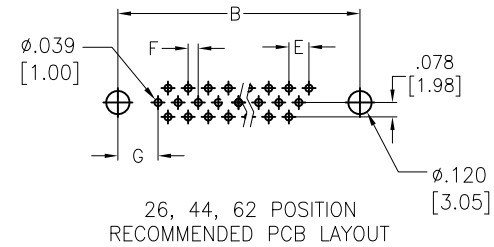
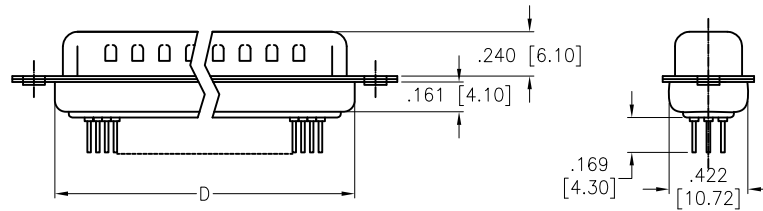
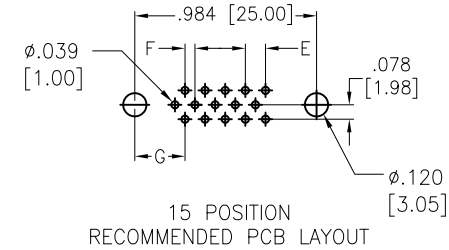


APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/5/05	
A		UPDATED DRAWING	5/27/16	HR/CT

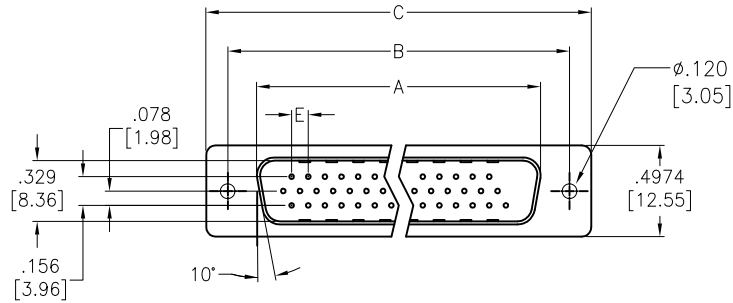

Positions	DIMENSIONS						
	A	B	C	D	E	F	G
15	.666 [16.92]	.984 [24.99]	1.213 [30.81]	.756 [19.20]	.090 [2.29]	.045 [1.145]	.277 [7.04]
26	1.004 [25.50]	1.312 [33.32]	1.541 [39.14]	1.091 [27.70]	.090 [2.29]	.045 [1.145]	.271 [6.88]
44	1.534 [38.96]	1.852 [47.04]	2.088 [53.04]	1.618 [41.10]	.090 [2.29]	.045 [1.145]	.271 [6.88]
62	2.182 [55.42]	2.500 [63.50]	2.729 [69.32]	2.256 [57.30]	.095 [2.41]	.047 [1.205]	.276 [7.00]

**SPECIFICATIONS:**

Material:  
 Insulator: PBT, glass reinforced, rated UL 94V-0  
 Insulator color: Black  
 Contacts: Copper Alloy  
 Shell: SPCC  
 Plating:  
 Gold flash over Nickel underplate on contact area  
 Electrical:  
 Operating voltage: 250 VAC  
 Current rating: 1 Amps  
 Contact resistance: 20 mohms max @ DC 100 mA  
 Insulation resistance: 1,000 Mohms min @ 500 VDC  
 Dielectric withstanding voltage: 500 VAC for 1 minute  
 Environmental:  
 Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010

**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

APPROVALS		DATE
DRAWN	SS	5/5/05
CHECKED		
APPROVED		

TITLE		
HIGH DENSITY D-SUB PLUG, PCB TAILS		
SIZE	PART NO.	REV.
X	HDTXX-PT	A
REF:	S00087T	SCALE: NTS SHEET 1 OF 1