

ITEM	PART#	DESCRIPTION	QTY	UOM
A	50579402	SL Crp Hsg G SR Pos Ltch 2 ckt Opt G	1	PC
B	16020086	SL Fem Crimp Term 22-24 Tin Reel x	2	PC
C	--	PAPER PRINTED PAPER WHITE	1	PC

FROM	TO	DESCRIPTION	COLOR
A1	--	1X22AWG DISC MPPE BK UL11028	BLACK
A2	--	1X22AWG DISC MPPE BK UL11028	BLACK

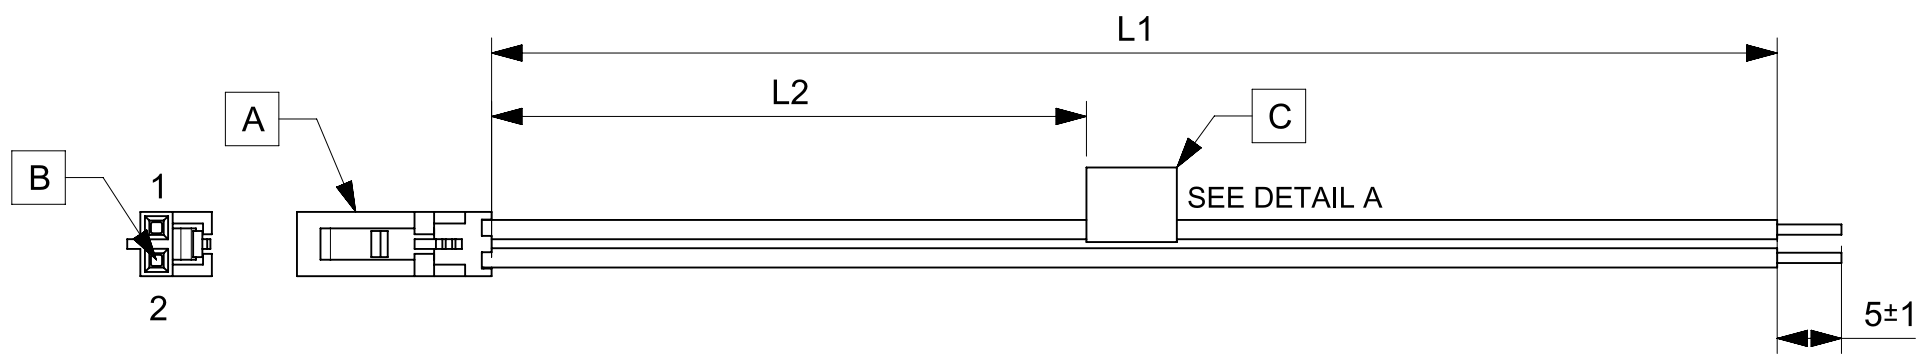


TABLE			
PART NUMBER	L1	L2	TITLE
2162711020	50±3	13 REF	SL POSITIVE LOCK R-S 2CKT 50MM Sn
2162711021	100±5	38 REF	SL POSITIVE LOCK R-S 2CKT 100MM Sn
2162711022	150±8	63 REF	SL POSITIVE LOCK R-S 2CKT 150MM Sn
2162711023	300±10	138 REF	SL POSITIVE LOCK R-S 2CKT 300MM Sn
2162711024	600±10	288 REF	SL POSITIVE LOCK R-S 2CKT 600MM Sn

NOTES

1. Connector view shown is from mating side.
2. Free ends must be stripped, twisted & tinned. The length of tinning is 5±1mm. Tinning dia must be 0.9mm Max.
3. Label text must be 2mm max. in height with Arial font.
4. Label must be wrapped in Flag type on a single cable.

MOLEX P/N
MOLEX
BATCH WK/YR
DETAIL A

REVISION			
DATE	REV	DESCRIPTION	CHANGER
2020/05/05	A	INITIAL RELEASE	ARAJU

FUNCTIONAL SYMBOLS $\frac{F}{A} = 0$ $\frac{F}{E} = 0$ $\frac{F}{P} = 0$ DIVISIONAL SYMBOLS	DIMENSION UNITS: mm SCALE: NTS		CURRENT REV DESC:			
	GENERAL TOLERANCES (UNLESS SPECIFIED)		EC NO: 642836			SEE TABLE
	ANGULAR TOL ± °		DRWN: ARAJU 2020/05/05			
	4 PLACES ±		CHK'D: RDESAI01 2020/08/05			
3 PLACES ±		APPR: RDESAI01 2020/08/05		PRODUCT CUSTOMER DRAWING		
2 PLACES ±		INITIAL REVISION:		DOCUMENT NUMBER		
1 PLACE ±		DRWN: ARAJU 2020/05/05		2162711020		
0 PLACES ±		APPR: RDESAI01 2020/08/05		PSD 000 A		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER	
			A4-SIZE	216271	CUSTOMER	
					GENERAL MARKET	
					SHEET NUMBER	
					1 OF 1	