

THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER	
ORIGINAL	

(1)

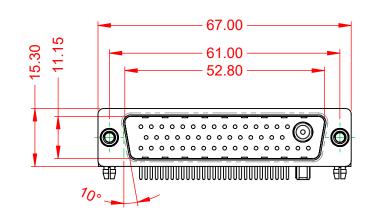




.X ±0.25 .XX ±0.13 .XXX ±0.05


NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:


THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, GOLD FLASH PLATED

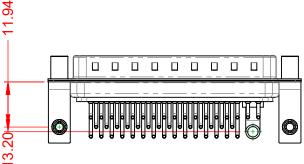

OPERATING TEMPERATURE:	-55°C ~ 125°C
POWER/CO-AX CONTACT RATING: (IF PRESENT)	40A (CURRENT)
SIGNAL CONTACT CURRENT RATING: SIGNAL CONTACT RESISTANCE:	5A PER CONTACT 10mΩ MAX.
INSULATOR RESISTANCE: DIELECTRIC	$5000M\Omega$ min.

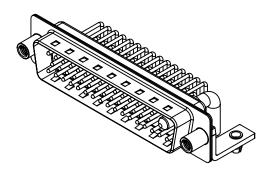

			SW REFER	RENCE NO.: 629 C	OMBO ASSEMBLY	
	COMBINATION D-SUB			C.B	DATE: JAN. 01/20	19
			CHECKED:		DATE:	
	EDAC INC TORONTO, ONTARIO CANADA ARE THE PROPERTY OF EDAC INC SHALL NOT BE REPRODUCED, OR OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APP,	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE:	(IN C.A.D. 1:1)	SHEET 1 OF	2
		SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 629-47W1240-41D		ISSUE	
YOUR CONNECTION TO			PART NUM	IBER: 629-47W	1240-4TD	1

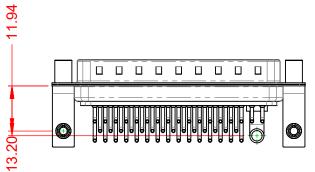

F #HS	
COMPLIANT	

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

YOUR CON	EDAC INC TORONTO, ON CANADA QUALITY & SER

WITHSTANDING VOLTAGE:

1000V AC rms

