


DIT IS ONZE EIGENDOM EN MAG NOCH NAGEMAAKT, HERDRUKT, OVERGEMAAKT AAN DERDEN, NOCH VOOR FABRIKATIE GEBRUIKT WORDEN, ZONDER ONZE SCHRIFTELIJKE TOELATING. BIJ NIET GEBRUIK IS DE TERUGZENDING VERPLICHT.

THIS IS OUR EXCLUSIVE PROPERTY. IT IS NOT TO BE COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY, NOR USED FOR MANUFACTURING WITHOUT OUR WRITTEN CONSENT, AND HAS TO BE RETURNED TO US IN CASE OF NO USAGE

BS, A , 202105, 003, 0A

REV.	DATE	DESCRIPTION	BY	C'K'D'

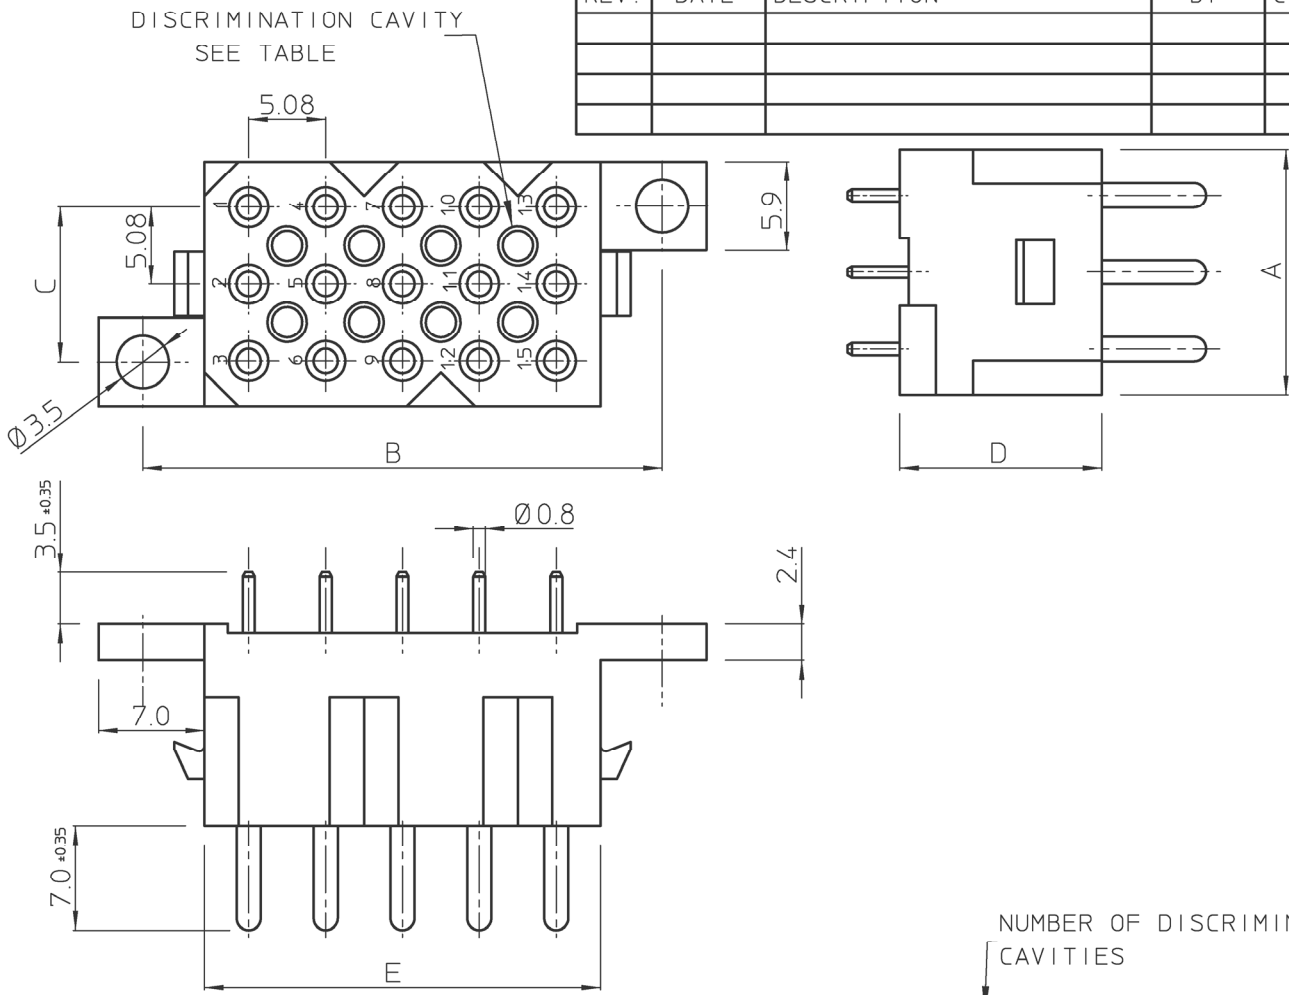

MATERIAL :

BODY : POLYESTER 30% GLASSFILLED, UL94V-0, COLOUR : BLACK
 CONTACTS : BRASS, GOLD OR TIN PLATED

PERFORMANCE CHARACTERISTICS :

- OPERATING TEMPERATURE : -55°C TO 105°C
- INSULTING RESISTANCE : 5000 MΩ MIN
- TEST POTENTIAL : 2000 VAC
- CURRENT RATING : 5 AMP
- CONTACT RESISTANCE : 6 mΩ MAX
- DURABILITY : 500 CYCLES

NOTES :

- CONNECTOR SUPPLIED FULLY LOADED WITH MACHINED PIN CONTACTS.
 AU PLATED : SMS--GE4 ; AU FLASH : SMS--GE4J ; TIN PLATED : SMS--GE4T
- MATING PARTS : SMS--P1 PLUG (WITHOUT CABLE HOOD) AND SMS--PDH1 (WITH CABLE HOOD).
- PC-BOARD THICKNESS : 2.4 MM
- DRILLING HOLE PATTERN : SEE BS,D ,201713,000
- DISCRIMINATION IS GUARANTEED WITHOUT LOSS OF CONTACT POSITION WHEN USING SMSPK3 DISCRIMINATION PINS. FOR TECHNICAL INFORMATION ABOUT SMSPK3 : SEE BS,C ,201424,003

GEN. ST.	01	02	03	04	05	06	07	08	0D	50	60	70	80	90																	
INT. ST.	10	11	12	13	14	18	20	31	32	33	34	38	39	40	42	43	44	45	46	48	56	70	72	73	75	76	81	82	83	84	88

1DEC ±0,2 1DEC 2DEC ±0,1 2DEC ANGLES ±1° HOEKEN	APPR.	DATE	SIGN.	STRAIGHT MALE REC. QIKMATE MACH. CONTACTS
WE RESERVE THE RIGHT TO CHANGE DIMENSIONS OR REQUIREMENTS WITHOUT PRIOR NOTICE.	DRAFT	13-03-96	S. Van Dessel	CAT. No. SMS--GE4-
ALL DIMENSIONS IN MM 	CHECKED			 SOURIAU Route Nationale 23 72470 CHAMPAGNE
ALLE AFMETINGEN IN MM	PROD. MGR.			
	PR. ENG. MGR.			BS, A , 202105, 003, 0A DRAWING NR. CUSTOMER DRAWING
	PR. MGT. MGR.			