

■ **Features**

- Single output from 2.5-7.5W
- 100-240Vac Universal Input
- Certificates: UL
- Frequency: 50-60Hz
- Ripple: 200mV
- SCP & OCP
- Input Plug: US
- Efficiency Level: VI
- Dimension: 60x39x34mm(exclude plug)



■ **Application**

- Consumer electronics, Telecom and office equipment
- Industrial equipment

*Product images are for illustrative purposes only and may vary from actual design.

■ **Model List**

Custom Designs Available!

| Model | Output Voltage | Output Current | Power | Certifications |
|-------------------------|----------------|----------------|-------|----------------|
| WM08Q-050-A-XX | 5V | 0.5A | 2.5W | UL, CE |
| WM08Q-050-A-XX Rev D1.2 | 5V | 1A | 5W | UL, CE |
| WM08Q-050-A-XX Rev D1.3 | 5V | 1.5A | 7.5W | UL, CE |
| WM08Q-120-A-XX | 12V | 0.6A | 7.2W | UL, CE |
| WM08Q-240-A-XX | 24V | 0.3A | 7.2W | UL, CE |

■ **Technical Data**

| | |
|--------------------|-----------------------------|
| Input Voltage | 100-240Vac |
| Input Frequency | 50/60Hz |
| Input Current | 0.3A max |
| Inrush Current | 25°C cold start at 240Vac |
| Leakage Current | 0.25mA Max. at 240Vac input |
| Line Regulation | ±2% |
| Load Regulation | ±5% |
| Ripple and Noise | 200mVp-p |
| Turn on delay time | 3s |
| Rise time | 40mS |
| Hold up time | 5mS |
| Efficiency | 83%; Level VI |

Technical Sales / Customer Service: +1-818-338-7788 • Email: sales@autec.com
 31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • www.autec.com

July 2, 2020


■ Technical Data


| | |
|--------------------------|---|
| Overshoot | 15% Max, when power supply is turned off/on |
| Standby Power | 0.1W Max at 115Vac |
| Short Circuit Protection | Auto recovery when short circuit fault is removed |
| Over Current Protection | Auto recovery when over current fault is removed |
| Operating Temperature | 0°C to 40°C, Full load |
| Storage Temperature | -20°C-60°C |
| Relative Humidity | 5%(0°C) ~90%(40°C)RH, 72hrs, full load |
| Vibration | IEC 721-3-3 3M3 |
| Dimensions LxWxH | 60x39x34mm 2.36x1.5x1.3in |
| Packing | 96Pcs/ Carton; Carton size 490x340x310mm |

■ Safety and EMI Standard

| | |
|--|---|
| Safety | UL60950 |
| Dielectric Strength Hi-Pot Primary to secondary | 4242Vdc/5mA/60S |
| Insulation resistance Primary to secondary | 20MΩ min at 500V |
| EMI Standard | FCC part15 class B rules, EN55032 class B Rules, GB17625.1-2012; AS/NZS CISPR32:2015, IEC61000-4-5, IEC61000-4-2. |

■ Mechanical Diagram

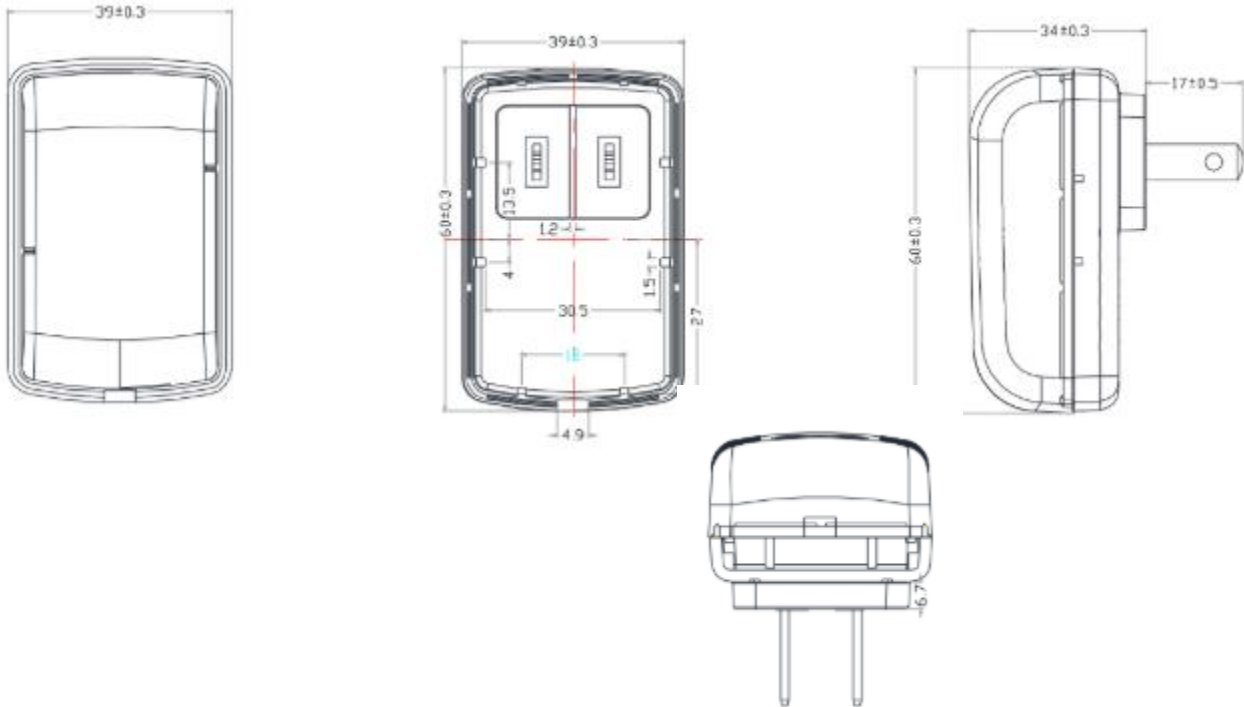

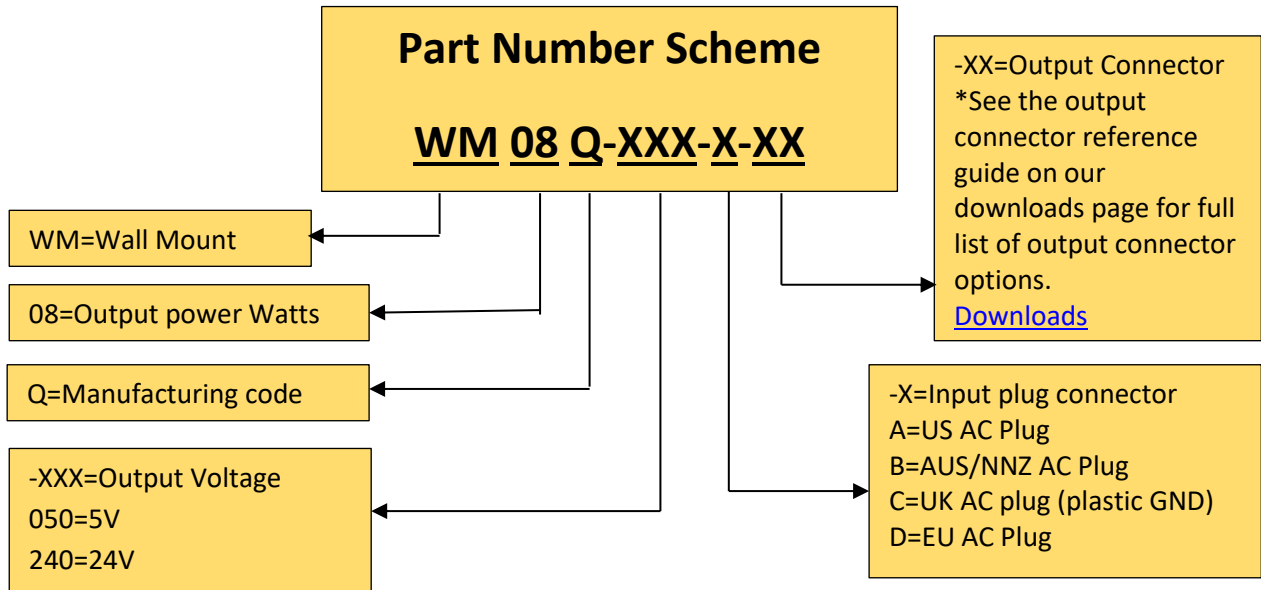

***Product images are for illustrative purposes only and may vary from actual design.**

***Specifications are subject to change without notice. Autec is not responsible for issues arising from errors or omissions.**