



ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00402	Connector, stereo plug, 3.5xL20.5 mm, brass, nickel plated, white, molding style	1	
2	30-00180	Wire, 3C BC, 28 AWG, 300V, 80C, 3.8 mm, foil + shield, PVC, white	1	
3	24-00028	Overmold, PVC	1	white

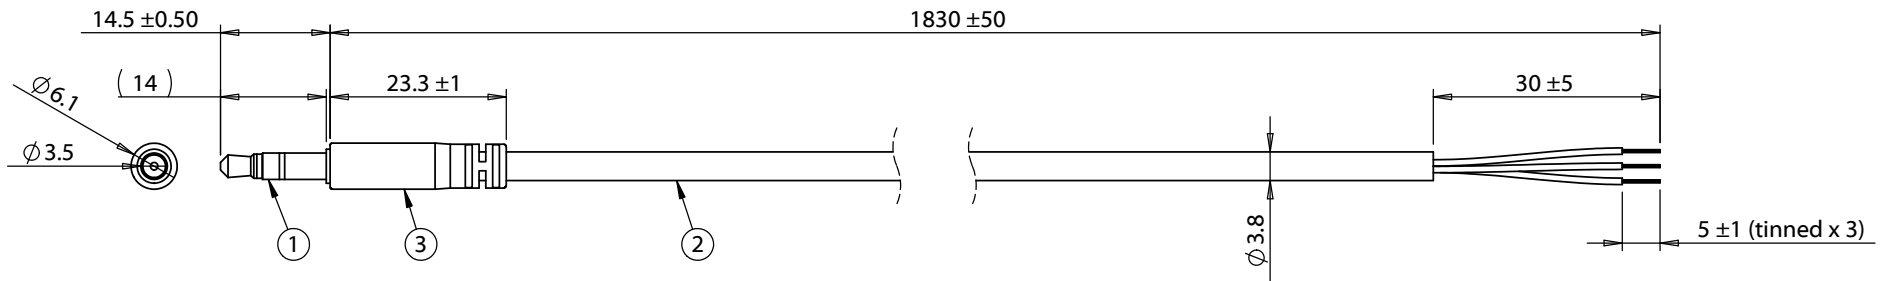

Wiring Diagram	
50-00402	wire color
A	red
B	white
C	green

**Notes:**

Cables individually tied and bundled in groups of 10

Functionally equivalent components may be substituted

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>		
A	4/16/2010	Initial release	GL <small>Digitally signed by GL Date: 2016.10.28 11:00:17 -07'00'</small>	RoHS compliant			
A1	9/6/2011	Updated specification	Verified: DN <small>Digitally signed by DN Date: 2016.10.28 15:14:23 -07'00'</small>	Function test: no open, no short circuit, no intermittent			
A2	3/28/2012	Updated wire part number	Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description:			
A3	3/28/2014	Updated connector		Cable, 1830 mm, 3.5 mm 50-00402 slim stereo plug to 5 mm tinned, 28 AWG, 30-00180, shielded, white		Size: A Part number: 10-00336	
A4	10/28/2016	Corrected overmold dimensions			Scale: 1:1		Sheet 1 of 1