




THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20  
 © COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

REVISIONS



P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	REVISED	01JUN2015	T.S	N.Y
	B1	PACKAGING INSTRUCTION NOTE UPDATED	04FEB2022	SS	KT

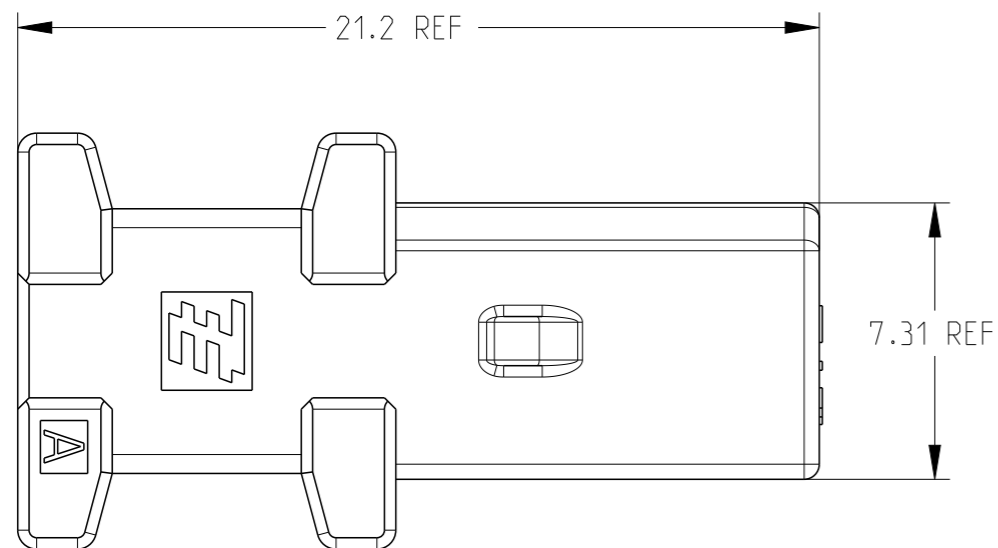

WIREING SCHMATIC




PIN NO.

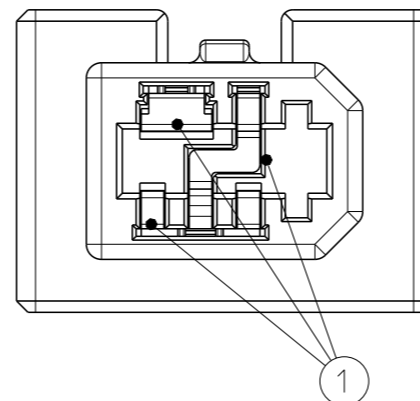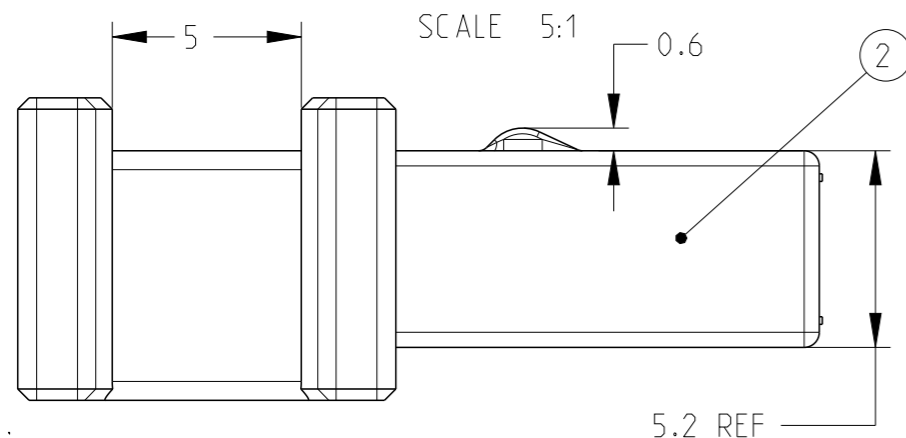

NOTES:  
 1. GENERAL TOLERANCE: ±0.3.  
 2. CAN NOT BE MATED WITH CABLE.

3. THE PACKAGE OF 1971153-1 REFER TO FGPI-1971153 (SHEET-1)  
 THE PACKAGE OF 1971153-2 REFER TO FGPI-1971153 (SHEET-2)

QTY REQD PER ASSY				MATERIAL/FINISH	PART NAME	ITEM NO
-	-	1	1	POLYAMID OF GLASS FIBER PLASTIC UL94V-0	HOUSING	2
-	-	1	1	COPPER ALLOY UNDER ALL SURFACE Ni PLATING 1.27 um MIN. CONTACT AREA Au Plating 0.3 um MIN.	CONTACT	1
-	-	-	-			
-	-	-2	-1			

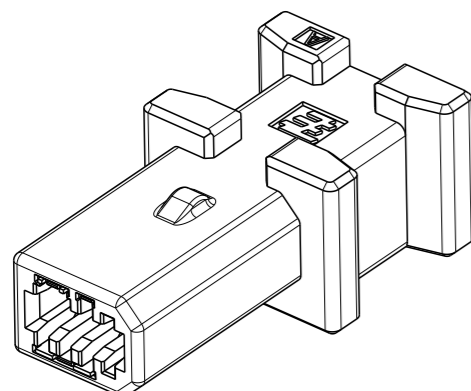

S08-037 PROJECT NO.		QTY REQD PER ASSY		PARTS LIST	
THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN 25JUN2008 SAMUEL SUN	
DIMENSIONS: mm				CHK 26JUN2008 ROCK LV	
TOLERANCES UNLESS OTHERWISE SPECIFIED:				APVD 27JUN2008 JULIAN ZHOU	
0 PLC ±				PRODUCT SPEC	
1 PLC ±0.5				108-106021	
2 PLC ±0.13				APPLICATION SPEC	
3 PLC ±0.013				-	
4 PLC ±0.0001				WEIGHT 1.3g	
ANGLES ±				SIZE A3	
MATERIAL				CAGE CODE 00779	
FINISH				DRAWING NO C-1971153	
-				RESTRICTED TO	
-				Customer Drawing	
SCALE 5:1				SHEET 1 OF 1	
REV B1					



ASSEMBLY INDUSTRIAL MINI I/O BY-PASS CONNECTOR