


AMOVABLE CONTACT - PACKAGING 10

SERIES: ACC.1

1 / 1

PEN 90-1206-11B

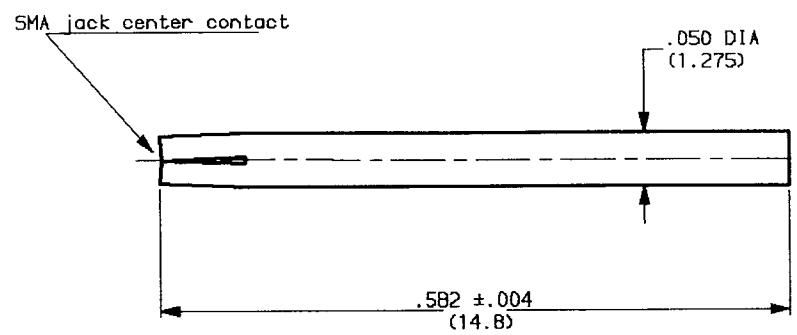

MOUNTING HOLE

B

WEIGHT oz (g)

cables:

CHARACTERISTICS

NOMINAL IMPEDANCE	NA	Ω
FREQUENCY RANGE	NA	GHz
TEMPERATURE RATING	NA	°C
VSWR	NA	Max
RF INSERTION LOSS	NA	dB Max
VOLTAGE RATING	NA	Vrms
DIELECTRIC WITHSTANDING VOLTAGE	NA	Vrms
INSULATION RESISTANCE	NA	MΩ
HERMETIC SEAL	NA	cc/s cm ³ /s
LEAKAGE (pressurized only)	NA	psi kg/cm ²
-	NA	-
-	NA	-

STANDARDISATION

CABLE RETENTION

NA	Lb Min
NA	N Min

CENTER CONTACT RETENTION

Axial force - mating end
Axial force - opposite end
Torque (Min)

NA	Lb Min
NA	N Min
NA	Lb Min
NA	N Min
NA	Inch. oz
NA	cm. N

RECOMMENDED TORQUES

Mating
Panel nut
Clamp nut

NA	inch. Lb
NA	cm. N
NA	inch. Lb
NA	cm. N
NA	inch. Lb
NA	cm. N

CONSTRUCTION

CONNECTOR PARTS	MATERIALS	FINISH
BODY	-	-
OUTER CONTACT	-	-
CENTER CONTACT	Beryllium copper	Gold over nickel
INSULATORS	-	-
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-

ISSUE	REVISION No	DESCRIPTION	BY	DATE
.
.
.
.

Initiated on 24-MAY-91

The information given here is subject to change without notice. Design changes may be in order to improve the product.



Superseded on