

# FFA.2S.140.CTAC52

# **SUMMARY**

#### ......

# Wires			
Low	1		
High	0		
Coax	0		Image is for illustrative purpose only
Triax	0	Download	
Quad	0	Request a quote	
Fiber	0	Catalog	
Fluidic	0	<u>×</u>	
Series	25		
Termination type	Male solder		
IP rating	50		
Cable Ø	4.30 - 5.20 mm		
Status	active		
Alternative part			
Matching parts	ERA.2S.140.CTL		

# **TECHNICAL DETAILS**

#### **Mechanics**

Shell Style/Model	FFA*: Straight plug, cable collet		
Keying	Circular (can rotate), plug has male contact(s)		
Housing Material	Brass (chrome plated) shell and collet nut, nickel plated brass latch sleeve and mid pieces		
Variant			
Weight	33.71 g		

#### Performance

Configuration	2S.140 : 1 Low Voltage	
Insulator	T: PTFE	
Rated Current	40 Amps	

#### **Specifications**

Contact Type: Solder Vtest (contact-shell): 1800 V (AC), 2550 V (DC) Vtest (contact-contact): 1800 V (AC), 2550 V (DC)


LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

#### Others

Endurance (Shell): 5000 mating cycles Temp (min / max): -55°C / +250°C Humidity (max): <=95% [at 60 deg C /140 F] Vibration: 15 g [10 Hz - 2000 Hz] Shock Resistance: 100 g [ 6 ms] Climatical Category: 50/175/21 Shielding (min): 75 dB (10 MHz) Shielding (min): 40 dB (1 GHz) Salt Spray Corrosion: >144 hr IP Rating: 50

### DRAWINGS

Draws

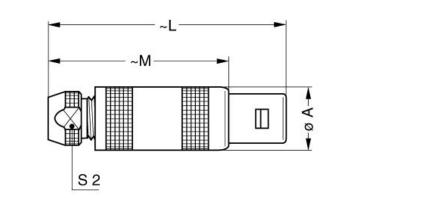

#### Dimensions

	А	L	Μ	S2
mm.	14.8	52	40	11
in.	0,58	2,05	1,57	0,43

# **RECOMMENDED BY LEMO**

#### Tools

Spanner wrench: DCD.2S.025.PA110

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Cables

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.