THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION . . – 2016
© COPYRIGHT 2016 By Tyco Electronics Japan G.K. ALL RIGHTS RESERVED.

REVISIONS 変更

P	LTR	DESCRIPTION	DATE	DWN	APVD
	N10	REVISED ECR-18-015766	07JAN2019	TS	YN

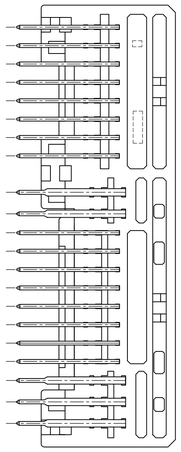

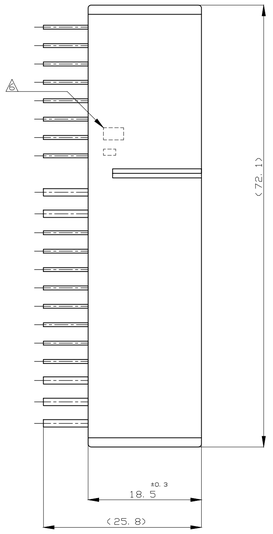

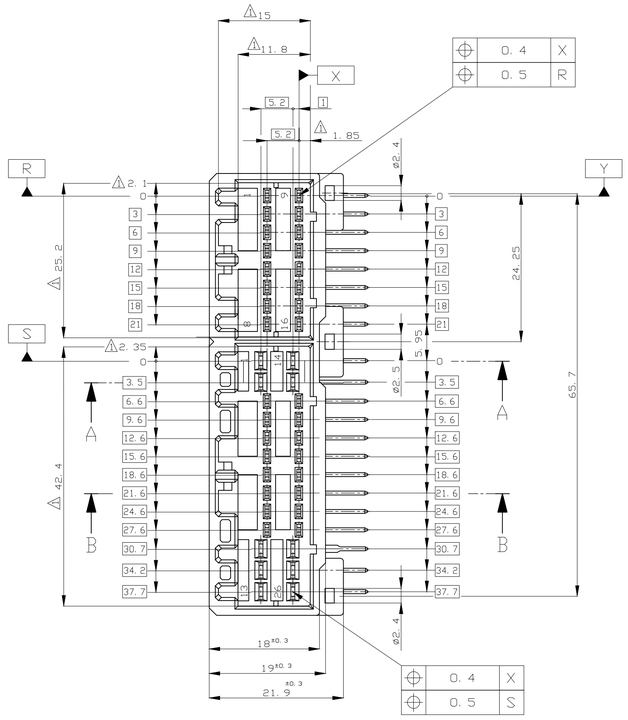

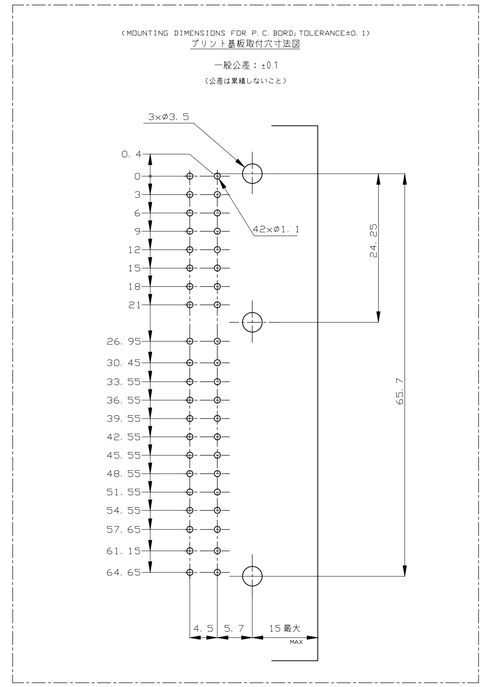

⚠1 □Z 面から2mmの範囲で測定
2. 嵌合相手ハウジング型 174514, 174516, 917981, 917992
3. 推奨取付ねじ：JIS B1115, B1122 タッピングねじ，なべ2種
呼び径3，長さ6mm以下 （締付けトルク：0.4N-m（4kg-cm）以下）
4. 適用製品規格番号：108-5280, 5342
⚠2 回路番号：
パワー回路 ①～⑩
シグナル回路 ⑪～㊷



⚠3 コンタクト仕上識別マーク

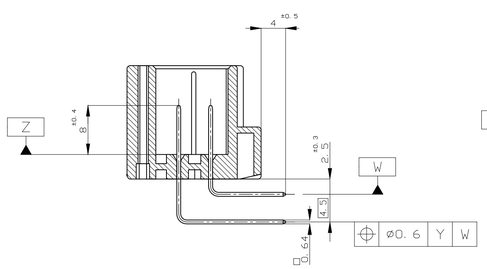

A-A



B-B

⚠1 MUST BE KEPT BETWEEN □Z AND 2
2 THE MATING PLUG HSG. PART NUMBER; 174514, 174516, 917981, 917992
3 RECOMMENDED MOUNTING SCREW; 3mmDIA, 6mmLENGTH(MAX.)
PAN HEAD, CLASS 2 TAPPING SCREW SPECIFIED IN JIS
B1115, B1122
(TIGHTENING TORAUE; 0.4N-m(4kg-cm)MAX.)
4 APPLICABLE PRODUCT. SPEC NO ; 108-5280, 108-5342
⚠2 CIRCUIT NUMBER
POWER CIRCUIT NO. ①～⑩
SIGNAL CIRCUIT NO. ⑪～㊷
⚠3 MARKING FOR DISCERNMENT OF THE CONTACT FINISH

	54	SELECTIVE-TIN (MATTE) PRE-TINNED × 31	SELECTIVE GOLD × 11	⑩	㉙-㉚-㉞-㊲-㊵-㊷	GRAY 灰色	4-5175446-6
	59	SELECTIVE-TIN (MATTE) PRE-TINNED × 40	SELECTIVE GOLD × 2	／／	⑬-㉓	GRAY 灰色	9-5175446-6
	58	SELECTIVE-TIN (MATTE) PRE-TINNED × 26	SELECTIVE GOLD × 16	／／	⑪-㉖	GRAY 灰色	8-5175446-6
	58	SELECTIVE-TIN (MATTE) PRE-TINNED × 26	SELECTIVE GOLD × 16	／／	⑪-㉖	NATURAL 自然色	8-5175446-1
	56	SELECTIVE-TIN (MATTE) PRE-TINNED × 25	SELECTIVE GOLD × 17	⑨	㉗-㊷	NATURAL 自然色	6-5175446-1
	54	SELECTIVE-TIN (MATTE) PRE-TINNED × 34	SELECTIVE GOLD × 8	／／	⑲-㉖	NATURAL 自然色	4-5175446-1
	53	SELECTIVE-TIN (MATTE) PRE-TINNED × 36	SELECTIVE GOLD × 6	／／	㉘-㉚-㉛-㉜-㊱-㊵	GRAY 灰色	3-5175446-6
	53	SELECTIVE-TIN (MATTE) PRE-TINNED × 34	SELECTIVE GOLD × 8	／／	⑱-⑲-⑳-㉖-㉗-㉞-㉟-㊷	NATURAL 自然色	3-5175446-1
	52	SELECTIVE-TIN (MATTE) PRE-TINNED × 10	SELECTIVE GOLD × 32	／／	①-㊷	GRAY 灰色	2-5175446-6
	52	SELECTIVE-TIN (MATTE) PRE-TINNED × 10	SELECTIVE GOLD × 32	／／	①-㊷	NATURAL 自然色	2-5175446-1
	55	SELECTIVE-TIN (MATTE)	SELECTIVE GOLD × 12 SELECTIVE-TIN (BRIGHT) × 30	／／	㉑-㉖-㊱-㊵-㊷	NATURAL 自然色	5-5175446-1
	9	TIN-LEAD PRE-TINNED × 40	SELECTIVE GOLD × 2	／／	⑬-㉓	GRAY 灰色	9-175446-6
OBSOLETE	8	TIN-LEAD PRE-TINNED × 26	SELECTIVE GOLD × 16	／／	⑪-㉖	GRAY 灰色	8-175446-6
	8	TIN-LEAD PRE-TINNED × 26	SELECTIVE GOLD × 16	／／	⑪-㉖	BLACK 黒色	8-175446-2
	8	TIN-LEAD PRE-TINNED × 26	SELECTIVE GOLD × 16	／／	⑪-㉖	NATURAL 自然色	8-175446-1
	7	TIN-LEAD PRE-TINNED × 39	SELECTIVE GOLD × 3	／／	⑭-⑮-㉒	BLUE 青色	7-175446-5
	6	TIN-LEAD PRE-TINNED × 25	SELECTIVE GOLD × 17	⑨	㉗-㊷	NATURAL 自然色	6-175446-1
	5	TIN-LEAD PRE-TINNED × 30	SELECTIVE GOLD × 12	／／	㉑-㉖-㊱-㊵-㊷	NATURAL 自然色	5-175446-1
	4	TIN-LEAD PRE-TINNED × 31	SELECTIVE GOLD × 11	⑩	㉙-㉚-㉞-㊲-㊵-㊷	GRAY 灰色	4-175446-6
	4	TIN-LEAD PRE-TINNED × 34	SELECTIVE GOLD × 8	／／	⑲-㉖	NATURAL 自然色	4-175446-1
	3	TIN-LEAD PRE-TINNED × 36	SELECTIVE GOLD × 6	／／	㉘-㉚-㉛-㉜-㊱-㊵	GRAY 灰色	3-175446-6
	3	TIN-LEAD PRE-TINNED × 34	SELECTIVE GOLD × 8	／／	⑱-⑲-⑳-㉖-㉗-㉞-㉟-㊷	NATURAL 自然色	3-175446-1
	2	TIN-LEAD PRE-TINNED × 10	SELECTIVE GOLD × 32	／／	①-㊷	GRAY 灰色	2-175446-6
	0	PRE-TINNED 錫めっき × 42		／／	／／	GRAY 灰色	175446-6
	1	SELECTIVE-TIN (MATTE) 部分すずめっき	SELECTIVE-TIN (錫めっき) × 42	／／	／／	NATURAL 自然色	175446-2
	0	PRE-TINNED 錫めっき × 42		／／	／／	NATURAL 自然色	175446-1
⚠3 MARKING マーキング		SOLDERING SIDE 半田付け部	CONTACT SIDE 接触部側	POWER CIRCUIT NO. パワー回路	SIGNAL CIRCUIT NO. シグナル回路	HOUSING COLOR ハウジング色	PART NO
		FINISH OF CONTACT テブ仕上(本数)		⚠2 CIRCUIT NO. OF GOLD PLATED CONTACT 金メッキ端子使用回路番号			

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: 単位： 粍 mm

TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差

0 PLC	± –
1 PLC	± –
2 PLC	± –
3 PLC	± –
4 PLC	± –
ANGLES	± –

GENERAL TOLERANCE

0<×≦ 10	±0.2
10<×≦ 30	±0.25
30<×≦100	±0.3
ANGLES	±3°

MATERIAL 材料: HOUSING; PBT CONTACT; BRASS

FINISH 付上: SEE TABLE 表参照

DWN	M.KADOSAKI	17MAY05
CHK	T.SHINOHARA	17MAY05
APVD	K.BETSUI	17MAY05

PRODUCT SPEC 製品規格: SEE NOTE 4

APPLICATION SPEC 取付適用規格: –

WEIGHT: 21.3 g

TE Connectivity

NAME 名称: 42POSITION CAP HOUSING ASSY 040/070 SERIES HYBRID I/O CONNECTOR

SIZE	CAGE CODE	DRAWING NO 番号	RESTRICTED TO
A1	00779	C-175446	–

CUSTOMER DRAWING

SCALE 尺度	SHEET	OF	REV.
2:1	1	1	N10