


## Data sheet | Item number: 852-602

Industrial Managed Switch; 8-port 100Base-TX; PROFINET; Extended temperature range; black metallic

[www.wago.com/852-602](http://www.wago.com/852-602)



Color: —

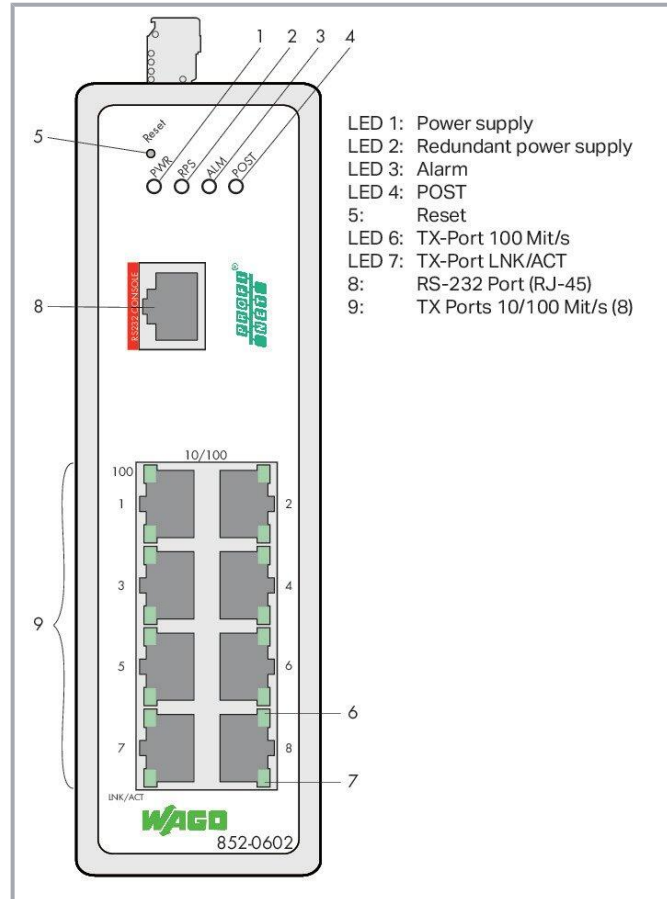

### Item description

The 852-602 Industrial Managed Switch is a configurable ETHERNET switch equipped with eight 10/100Base-TX copper ports. Packaged in a rugged housing, this switch offers both a redundant power supply and relay-based function monitoring.

The PROFINET certificate (conformity class B) guarantees easy integration into PROFINET automation systems using the device description file (GSD). In addition, the device supports the PROFINET Netload Class II.

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.



The device supports flexible multi-port mirroring configuration via device description file or Web-Based Management. Function blocks allow cyclic PROFINET switch diagnostics to be efficiently implemented within the TIA Portal. An application note that outlines this process is available.

**Features:**

- Web-based/SNMP management
- Redundant DC power supply
- Power supply range: 12 ... 60 VDC
- DIP switches to set alarm functions
- Full compliance with IEEE802.3, 802.3u, 802.3x, 802.1d, 802.1w, 802.1s, 802.1Q, 802.1p standards
- Media redundancy protocol (MRP) as manager (MRM) or client (MRC), redundant ring
- Non-blocking, store-and-forward switching, rapid spanning tree protocol (RSTP)
- Autonegotiation and AUTO-MDI/MDIC (crossover)
- VLAN (802.1Q) VID
- IGMP snooping
- Port configuration, status, statistics
- Port trunking and multi-port mirroring
- SNMP v1/v2c/v3 and RMON
- Time synchronization via SNTP
- Storm control, bandwidth limitation and loop detection

**Data**

**Technical data**

Switching mode	Store-and-forward; non-blocking
Number of 100 Mbit/s ports	8
Communication standards	IEEE 802.3 10BASE-T IEEE 802.3u 100BASE-TX IEEE 802.3x Flow Control IEEE 802.1d Spanning Tree Protocol (STP) IEEE 802.1w Rapid Spanning Tree Protocol (RSTP) IEEE 802.1s Multiple Spanning Tree Protocol (MSTP) IEEE 802.1Q VLAN Tagging IEEE 802.1p Class of service IEEE 802.1ab Link Layer Discovery Protocol (LLDP) PROFINET Conformance Class B
Redundancy function	Redundant DC power supply; STP; RSTP; MSTP; Media redundancy protocol as manager or client
Configuration options	DIP switch for signal contact Web-Based Management Command Line Interface SNMPv1/v2c/v3
Diagnostics	Signal contact; Port status; Port statistics; Port load; Traffic monitor;

Subject to changes. Please also observe the further product documentation!



	SFP information; Syslog; SNMP traps; PN diagnostics (cyclic and acyclic)
MAC table (size)	16000 addresses
Jumbo frame size	10000. Byte
Supply voltage	12 ... 60 VDC
Power consumption (max.)	12 W
ESD (contact/air discharge)	8 KV / 15 KV
Baud rate	Copper cable: 10/100 Mbit/s
Transmission medium (communication/fieldbus)	Copper cable: Cat. 5e or higher, 100 m maximum cable length
VLAN	Port-based and tag-based (4k VIDs)
Indicators	Device: LED (PWR, RPS) green: Power supply (primary), redundant power supply (secondary); LED (ALM) red: Alarm or PROFINET error (with active PROFINET mode); pro Port: LED (100, LNK/ACT) green: Status 100 Mbps, LNK/ACT ports 1 ... 8

### Connection data

Connection technology: communication/fieldbus	Copper cable: 8 x RJ-45
Connection technology: supply	1 x Built-in male connector: 231-436/001-000; included female connector (MCS Connectors): 2231-106/026-000

### Physical data

Width	50 mm / 1.969 inches
Height	162 mm / 6.378 inches
Depth	120 mm / 4.724 inches

### Mechanical Data

Weight	882 g
Color	black metallic

### Environmental requirements

Ambient temperature (operation)	-40 ... +70 °C
Ambient temperature (storage)	-40 ... +80 °C
Protection type	IP30
Relative humidity (without condensation)	95 %
Mounting type	DIN-35 rail
Vibration resistance	per IEC 60068-2-6
Shock resistance	per IEC 60068-2-27
EMC immunity to interference	per EN 61000-6-2

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
 Hansastr. 27  
 32423 Minden  
 Phone: +49571 887-0 | Fax: +49571 887-169  
 Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
 We are always happy to take your call at +49 (571) 887-44222.

EMC emission of interference	per EN 61000-6-4
Fire load	0.302 MJ

### Commercial data



ETIM 8.0	EC000734
ETIM 7.0	EC000734
PU (SPU)	1 pcs
Packaging type	box
Country of origin	TW
GTIN	4055143907989
Customs tariff number	85176200000

### Environmental Product Compliance


RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

### Approvals / Certificates

#### General approvals

Logo	Approval	Additional Approval Text	Certificate name
	EAC Brjansker Zertifizierungsstelle	TP TC 020/2011	EAC RU C-DE.AM02.B.00087/19
	UL Underwriters Laboratories Inc. (ORDINARY LOCATIONS)	UL 61010-2-201	E175199

#### Declarations of conformity and manufacturer's declarations

Logo	Approval	Additional Approval Text	Certificate name
	EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-

#### Protocol and fieldbus specific certificates

Logo	Approval	Additional Approval Text	Certificate name
	Profi-Net	-	Z12462

Subject to changes. Please also observe the further product documentation!

Siemens AG/ComDeC

## Optional accessories

### Cables and pluggable connectors

#### Connector plug



**Item no.: 750-976**  
PROFINET RJ-45 connector, IP20; ETHERNET 10/100 Mbit/s; for field assembly

[www.wago.com/750-976](http://www.wago.com/750-976)



**Item no.: 750-978/000-012**  
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 22; Strain relief

[www.wago.com/750-978/000-012](http://www.wago.com/750-978/000-012)



**Item no.: 750-979/000-012**  
Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568B; AWG 22; Strain relief

[www.wago.com/750-979/000-012](http://www.wago.com/750-979/000-012)



**Item no.: 750-978/000-021**  
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 24; Strain relief

[www.wago.com/750-978/000-021](http://www.wago.com/750-978/000-021)



**Item no.: 750-979/000-022**  
Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568B; AWG 24; Strain relief

[www.wago.com/750-979/000-022](http://www.wago.com/750-979/000-022)



**Item no.: 750-978/000-022**  
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 24; Strain relief

[www.wago.com/750-978/000-022](http://www.wago.com/750-978/000-022)



**Item no.: 750-979/000-011**  
Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568A; AWG 22; Strain relief

[www.wago.com/750-979/000-011](http://www.wago.com/750-979/000-011)



**Item no.: 750-979/000-013**  
Connector PROFINET; RJ-45; Cat. 6A; angled; AWG 22; Strain relief

[www.wago.com/750-979/000-013](http://www.wago.com/750-979/000-013)



**Item no.: 750-979/000-021**  
Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568A; AWG 24; Strain relief

[www.wago.com/750-979/000-021](http://www.wago.com/750-979/000-021)



**Item no.: 750-977/000-011**  
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 22

[www.wago.com/750-977/000-011](http://www.wago.com/750-977/000-011)

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



**Item no.: 750-978/000-013**  
Connector PROFINET; RJ-45; Cat. 6A; straight; AWG 22; Strain relief

[www.wago.com/750-978/000-013](http://www.wago.com/750-978/000-013)



**Item no.: 750-978/000-011**  
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 22; Strain relief

[www.wago.com/750-978/000-011](http://www.wago.com/750-978/000-011)



**Item no.: 750-977/000-022**  
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 24

[www.wago.com/750-977/000-022](http://www.wago.com/750-977/000-022)



**Item no.: 750-977/000-012**  
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 22

[www.wago.com/750-977/000-012](http://www.wago.com/750-977/000-012)



**Item no.: 750-977/000-013**  
Connector PROFINET; RJ-45; Cat. 6A; straight; AWG 22

[www.wago.com/750-977/000-013](http://www.wago.com/750-977/000-013)



**Item no.: 750-977/000-021**  
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 24

[www.wago.com/750-977/000-021](http://www.wago.com/750-977/000-021)

#### Power supplies

##### Power supply unit



**Item no.: 787-1632**  
Switched-mode power supply; Classic; 1-phase; 24 VDC output voltage; 10 A output current; TopBoost; DC OK contact

[www.wago.com/787-1632](http://www.wago.com/787-1632)



**Item no.: 787-1633**  
Switched-mode power supply; Classic; 1-phase; 48 VDC output voltage; 5 A output current; TopBoost; DC OK contact

[www.wago.com/787-1633](http://www.wago.com/787-1633)



**Item no.: 787-1635**  
Switched-mode power supply; Classic; 1-phase; 48 VDC output voltage; 10 A output current; TopBoost; DC OK contact

[www.wago.com/787-1635](http://www.wago.com/787-1635)



**Item no.: 787-1602**  
Switched-mode power supply; Classic; 1-phase; 24 VDC output voltage; 1 A output current; NEC Class 2; DC OK signal

[www.wago.com/787-1602](http://www.wago.com/787-1602)



**Item no.: 787-1622**  
Switched-mode power supply; Classic; 1-phase; 24 VDC output voltage; 5 A output current; TopBoost; DC OK contact

[www.wago.com/787-1622](http://www.wago.com/787-1622)



**Item no.: 787-1606**  
Switched-mode power supply; Classic; 1-phase; 24 VDC output voltage; 2 A output current; NEC Class 2; DC OK signal

[www.wago.com/787-1606](http://www.wago.com/787-1606)



**Item no.: 787-1623**  
Switched-mode power supply; Classic; 1-phase; 48 VDC output voltage; 2 A output current; DC OK signal

[www.wago.com/787-1623](http://www.wago.com/787-1623)

#### Interface module

##### Interface module

Subject to changes. Please also observe the further product documentation!



Item no.: 289-195

Interface module; RJ-45; IDC technology; Cat. 6; in mounting carrier; with shield connection

[www.wago.com/289-195](http://www.wago.com/289-195)

## Downloads

### Documentation

#### Manual

Product Manual Industrial Managed Switch 8 Ports 100BASE-TX, PROFINET; EXT	V 1.0.0 2019 Dec 12	pdf 15.0 MB	Download
---	------------------------	----------------	----------

#### Bid Text

852-602 X81 - Datei		xml 8.0 kB	Download
------------------------	--	---------------	----------

852-602 docx - Datei		docx 18.0 kB	Download
-------------------------	--	-----------------	----------

#### Additional Information

Disposal and Recycling Electrical and electronic equipment, Batteries, Packaging	V 1.1.0 2022 Aug 18	pdf 2.2 MB	Download
---	------------------------	---------------	----------

#### System Description

Industrial Switches – General Product Information		pdf 1.9 MB	Download
---	--	---------------	----------

## Runtime Software

#### Firmware

0852-0602, Industrial-Managed-Switch WAGO_FW0852-0602_V010003_IX02_F	V 02 2021 Jul 21	zip 9.0 MB	Download
---	---------------------	---------------	----------

## CAD/CAE-Data

#### CAD data

2D/3D Models 852-602		URL	Download
----------------------	--	-----	----------

#### CAE data

ZUKEN Portal 852-602

Subject to changes. Please also observe the further product documentation!

WAGO GmbH &amp; Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.



[URL](#) [Download](#)

EPLAN Data Portal 852-602

[URL](#) [Download](#)

## Device Files

### Device Description File

750-916; GSD files of version 2.x for PROFINET/ series 750/753, 765, 767 and 852	3.0 2023 Jan 15	zip 2.6 MB	<a href="#">Download</a>
GSD-Dateien der Version 2.x für PROFINET	2.33 2019 Jul 9	zip 44.1 kB	<a href="#">Download</a>

## Environmental Product Compliance

### Compliance Search

Environmental Product Compliance 852-602 Industrial Managed Switch; 8-port 100Base-TX; PROFINET; Extended temperature range; black metallic	<a href="#">URL</a>	<a href="#">Download</a>
--	---------------------	--------------------------

## Installation Notes

Subject to changes. Please also observe the further product documentation!