


ACTUAL SIZE

Notes:

- Material: Shell: Brass, Nickel Plate. Insulator: LCP
- Contacts: Phosphor Bronze
- Finish: Contact Area: Gold Plate over Nickel Plate on Solder Tail: Tin Plate over Nickel Plate

Electrical Specifications

- Rated Voltage: 30V AC (rms)
- Contact Current Rating: 1 A Max.
- Contact Resistance: 30 milliohms Max.
- Dielectric Withstanding: 500V AC
- Operating Temperature: -55°C to 85°C

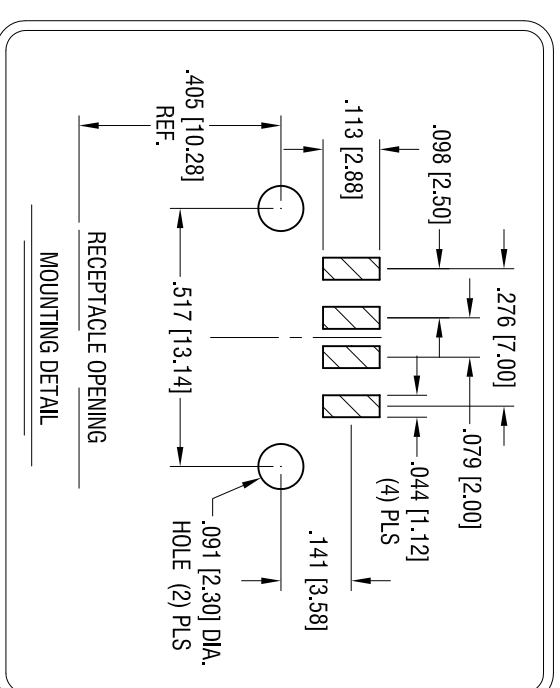

DATE	DESCRIPTION	REV.
12.16.09	CHANGE AS PER ECN 09-187	A
3.10.11	CHANGE AS PER ECN 11-037	B
6.07.18	CHANGE AS PER ECN 18-023 INSULATOR WAS PBT	C
11.04.19	CHANGE AS PER ECN 19-084 UPDATE PER SAMPLE	D

KEYSTONE ELECTRONICS CORP.

www.keystone.com • NEW HYDE PARK, NY 11040 • Tel (516) 328-7500

PART NAME

USB A-TYPE HORIZONTAL SMT SOCKET

MATERIAL

AS NOTED

FINISH

AS NOTED

TOLERANCES	INCH	[MM]	CODE	DWG NO.
DECIMAL	± .010	[± 0.25]	C	920
ANGULAR	± 1°			

DRN BY	DATE
BOONE	5.30.06

APP'D	SCALE
RH	3X

THIS DOCUMENT IS THE PROPERTY OF KEYSTONE ELECTRONICS CORP. AND SHALL NOT BE REPRODUCED, DISTRIBUTED OR USED AS A BASIS FOR MANUFACTURE WITHOUT PRIOR WRITTEN PERMISSION FROM KEYSTONE ELECTRONICS CORP.