



Electrical specifications

Center Frequency: 2575 MHz
Bandwidth: 30 MHz
VSWR: 1.5 : 1
Input / Output Impedance: 50 Ohms
Passband: 2560- 2590 MHz
Passband Insertion Loss: 2.0 dB max
Passband Ripple: 1.0 dB max
Rejection: 20 dB min at 2500 MHz
Rejection 2: 40 dB min at 2670-2690 MHz
Power Handling: 1 W

Mechanical


Mounting Method: SMT
Dimensions: 21 x 11 x 7 mm

Environmental

Operating Temperature: -30°C to 75°C
Storage Temperature: -50°C to +90°C

This product is RoHs compliant.

Outline Drawing:

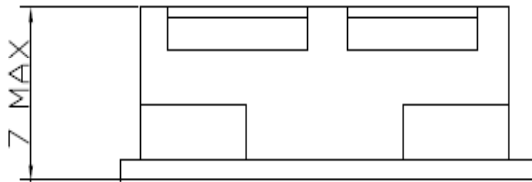

TOLERANCE UNLESS
OTHERWISE SPECIFIED : ±0.3
DIMENSIONS : mm

