
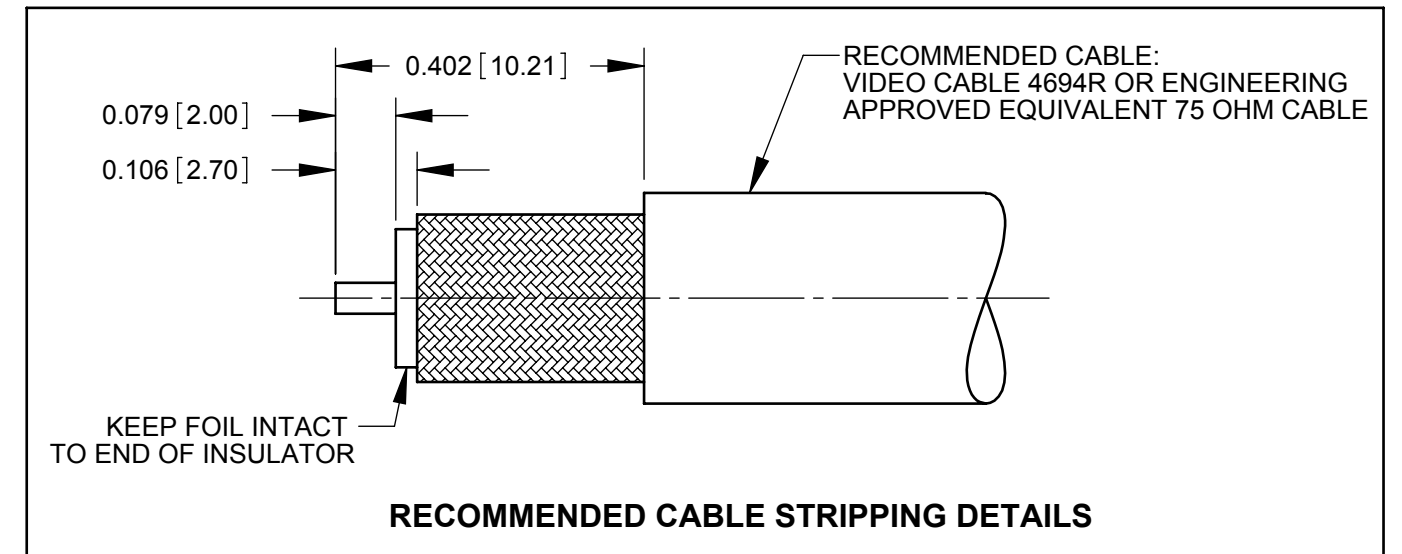


DIMENSIONS SHOWN FOR REFERENCE ONLY

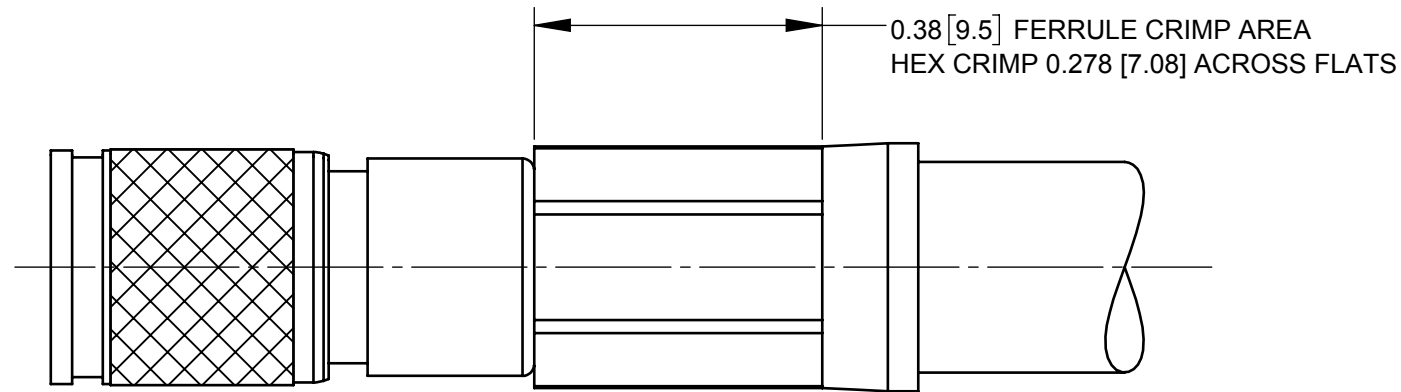

NOTES:

1. MEETS SMPTE 2082-1
CHARACTERISTIC IMPEDANCE: 75 OHMS
CONTACT RESISTANCE: 50 MILLIOHMS MAX.
2. MATERIAL:
BODY: COPPER ALLOY, NICKEL PLATED.
CONTACT PIN: COPPER ALLOY, GOLD PLATED.
SPRING: BERYLLIUM COPPER, NICKEL PLATED.
TINE CONTACT: BERYLLIUM COPPER, GOLD PLATED.
INSULATOR: TEFLON
FERRULE: COPPER ALLOY, NICKEL PLATED.
3. THIS PRODUCT IS RoHS COMPLIANT.

CUSTOMER DRAWING

					THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.				
					SIZE	WIDTH	MULT	LBS/M	TEMPER
					FINISH			MATERIAL	
					SPEC No.			SEE NOTES	
					FIRST USED ON		SCALE		
							4:1		
DATE DRAWN		BY	CHKD	APVD					
04/05/17		PNK	04/05/17	04/05/17					
			PNK	SRC					
REV					NAME		PART No.		REV
ECO NUMBER					UHD DIN 1.0/2.3 PLUG		UHDDIN94		A
DATE					75 OHMS, 4694R, RoHS				
BY									
APVD									
REVISIONS					DO NOT SCALE DRAWING				