

## TINA3-S

~13° spot beam optimized for CREE XP-E.  
Assembly with holder, installation tape and  
location pins.

### SPECIFICATION:

Dimensions	Ø 16.1 mm
Height	11.4 mm
Fastening	tape, pin
ROHS compliant	yes ⓘ

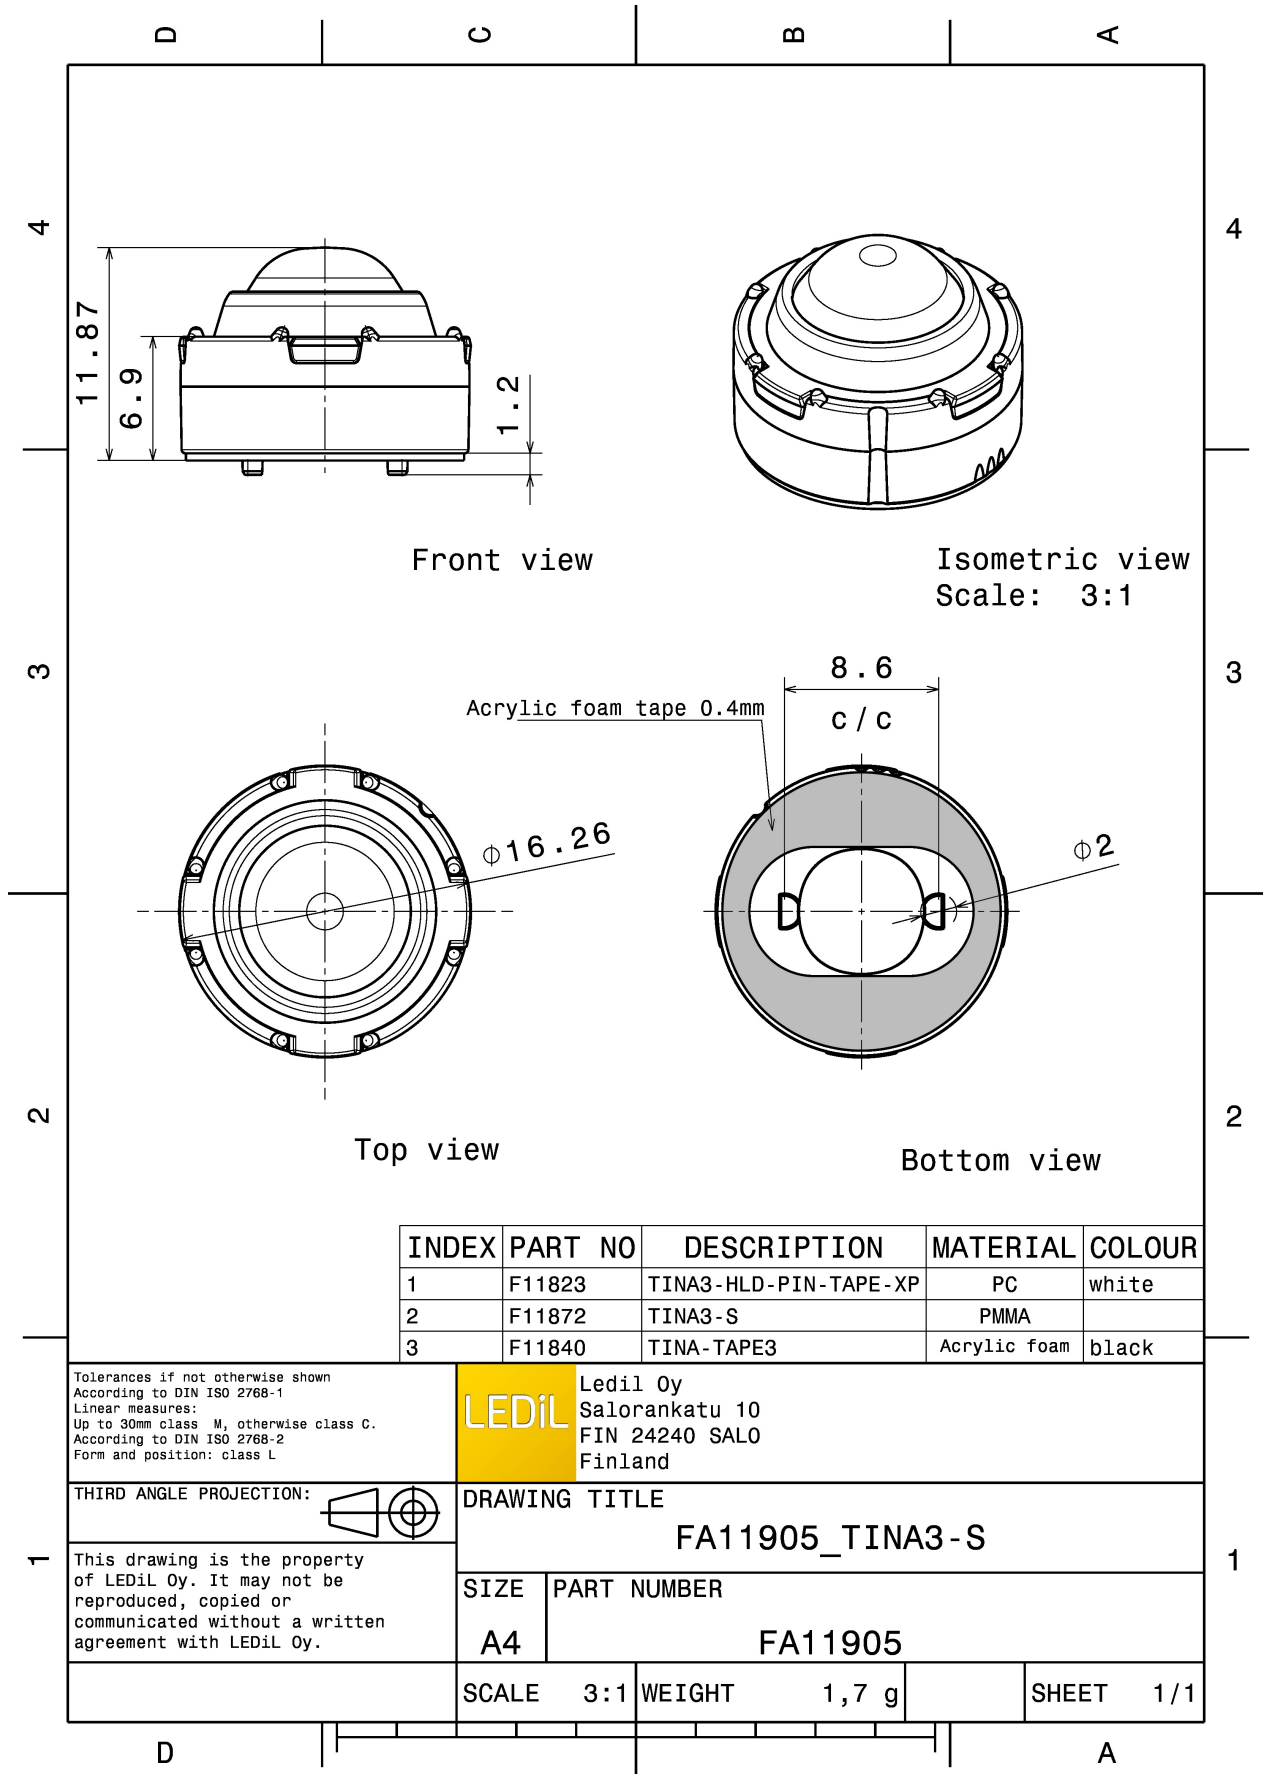


### MATERIALS:

Component	Type	Material	Colour	Finish
TINA3-S	Single lens	PMMA	clear	
TINA3-HLD-PIN-TAPE-XP	Holder	PC	white	
TINA-TAPE3	Tape	Acrylic foam	black	

### ORDERING INFORMATION:

Component		Qty in box	MOQ	MPQ	Box weight (kg)
FA11905_TINA3-S	Single lens	2016	288	288	3.7
» Box size:					




See also our general installation guide: [www.ledil.com/installation\\_guide](http://www.ledil.com/installation_guide)

#### OPTICAL RESULTS (MEASURED):

##### CREE LED

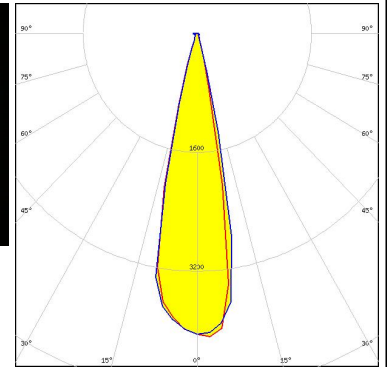LED XM-L  
 FWHM / FWTM 23.0° / 30.0°  
 Efficiency 86 %  
 Peak intensity 3.4 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:




##### CREE LED

LED XP-E  
 FWHM / FWTM 10.0° / 16.0°  
 Efficiency 86 %  
 Peak intensity 15.8 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:





##### CREE LED

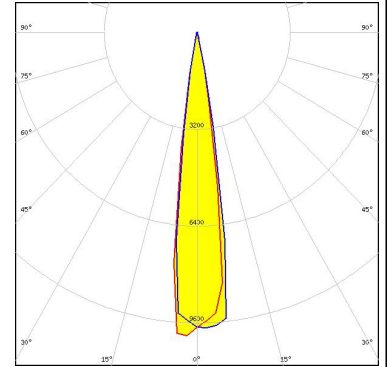LED XP-G  
 FWHM / FWTM 15.0° / 25.0°  
 Efficiency 86 %  
 Peak intensity 6.7 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:



##### CREE LED

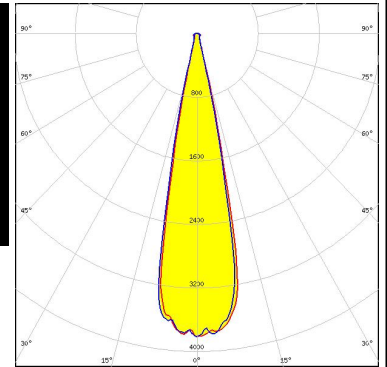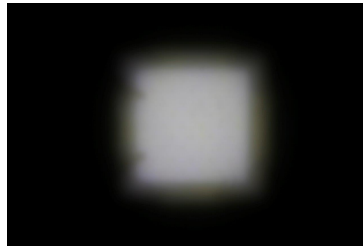
LED XP-L HD  
 FWHM / FWTM 23.0° / 32.0°  
 Efficiency 87 %  
 Peak intensity 3.8 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:



### OPTICAL RESULTS (MEASURED):



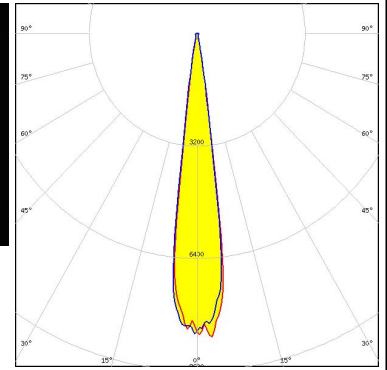LED XP-L HI  
 FWHM / FWTM 15.0° / 22.0°  
 Efficiency 88 %  
 Peak intensity 8.9 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:



LED LUXEON A  
 FWHM / FWTM 16.0° / 23.0°  
 Efficiency 83 %  
 Peak intensity 6.7 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:






LED LUXEON Rebel  
 FWHM / FWTM 11.0° / 18.0°  
 Efficiency 83 %  
 Peak intensity 12.9 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:



LED LUXEON Rebel ES  
 FWHM / FWTM 18.5° / 22.0°  
 Efficiency 82 %  
 Peak intensity 6.9 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

#### OPTICAL RESULTS (MEASURED):
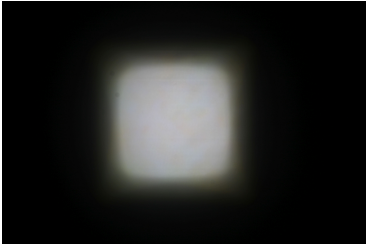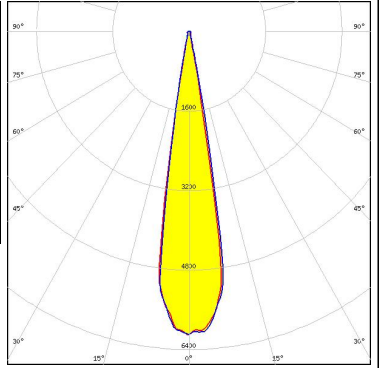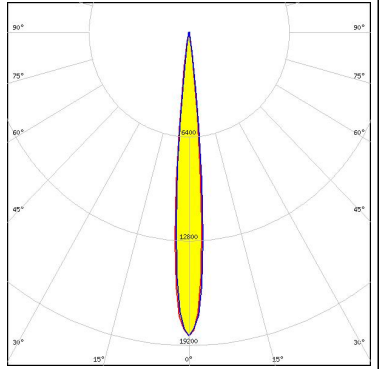
<p><b>NICHIA</b></p> <p>LED NVSW219F            FWHM / FWTM 18.0° / 24.0°            Efficiency 85 %            Peak intensity 6.1 cd/lm            LEDs/each optic 1            Light colour White            Required components:</p>		
<p><b>NICHIA</b></p> <p>LED NVSxx19A            FWHM / FWTM 16.5° / 23.0°            Efficiency 87 %            Peak intensity 6.8 cd/lm            LEDs/each optic 1            Light colour White            Required components:</p>		
<p><b>OSRAM</b>  <small>Opto Semiconductors</small></p> <p>LED OSLOM SSL 150            FWHM / FWTM 9.0° / 14.0°            Efficiency 84 %            Peak intensity 18.4 cd/lm            LEDs/each optic 1            Light colour White            Required components:</p>		
<p><b>OSRAM</b>  <small>Opto Semiconductors</small></p> <p>LED OSLOM SSL 80            FWHM / FWTM 11.0° / 17.0°            Efficiency 86 %            Peak intensity 14 cd/lm            LEDs/each optic 1            Light colour White            Required components:</p>		


## OPTICAL RESULTS (MEASURED):

		
SEOUL SEMICONDUCTOR		
LED	Z5	
FWHM / FWTM	10.0° / 17.0°	
Efficiency	80 %	
Peak intensity	16.4 cd/lm	
LEDs/each optic	1	
Light colour	White	
Required components:		

#### OPTICAL RESULTS (SIMULATED):


##### CREE LED

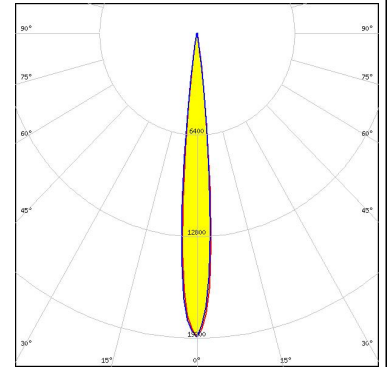LED XP-E2  
 FWHM / FWTM 10.0° / 17.0°  
 Efficiency 92 %  
 Peak intensity 19.1 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:




##### CREE LED

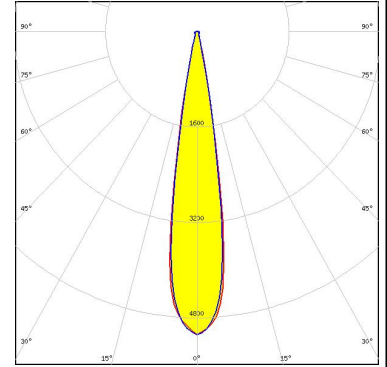LED XP-G3  
 FWHM / FWTM 18.0° / 28.0°  
 Efficiency 78 %  
 Peak intensity 5.1 cd/lm  
 LEDs/each optic 1  
 Light colour Blue  
 Required components:




##### LUMILEDS

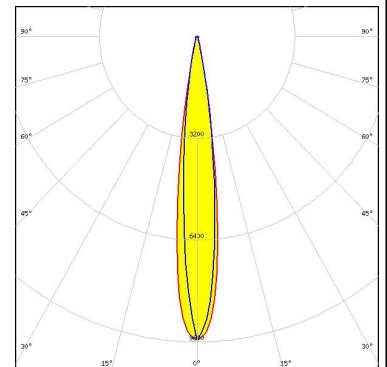LED LUXEON 2835 Line  
 FWHM / FWTM 13.0° / 25.0°  
 Efficiency 91 %  
 Peak intensity 9.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:







##### LUMINUS

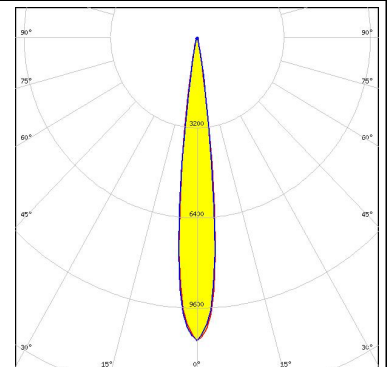LED SST-20  
 FWHM / FWTM 12.0° / 22.0°  
 Efficiency 86 %  
 Peak intensity 10.8 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:







#### OPTICAL RESULTS (SIMULATED):
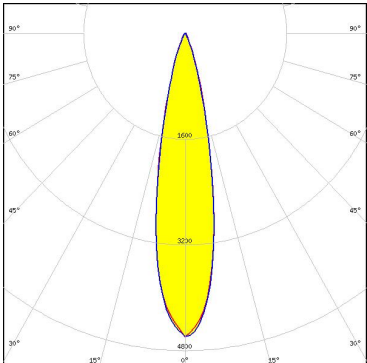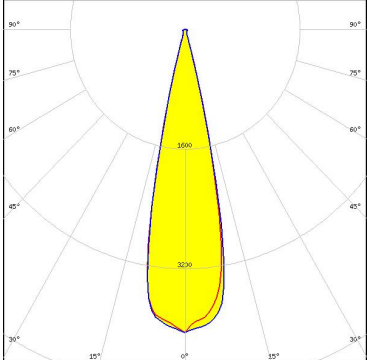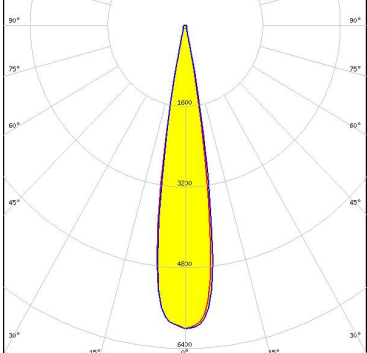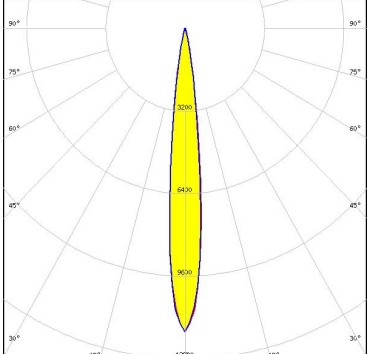
<p><b>NICHIA</b></p> <p>LED: NV4WB35AM            FWHM / FWTM: 22.0° / 41.0°            Efficiency: 90 %            Peak intensity: 4.6 cd/lm            LEDs/each optic: 1            Light colour: White            Required components:</p>	
<p><b>NICHIA</b></p> <p>LED: NVSW519A            FWHM / FWTM: 24.0° / 32.0°            Efficiency: 82 %            Peak intensity: 4.1 cd/lm            LEDs/each optic: 1            Light colour: White            Required components:</p>	
<p><b>NICHIA</b></p> <p>LED: NVSxx19B/NVSxx19C            FWHM / FWTM: 18.0° / 26.0°            Efficiency: 83 %            Peak intensity: 6 cd/lm            LEDs/each optic: 1            Light colour: White            Required components:</p>	
<p><b>OSRAM</b>  <small>Opto Semiconductors</small></p> <p>LED: OSOLON Black            FWHM / FWTM: 12.0° / 23.0°            Efficiency: 86 %            Peak intensity: 11.8 cd/lm            LEDs/each optic: 1            Light colour: White            Required components:</p>	



#### OPTICAL RESULTS (SIMULATED):
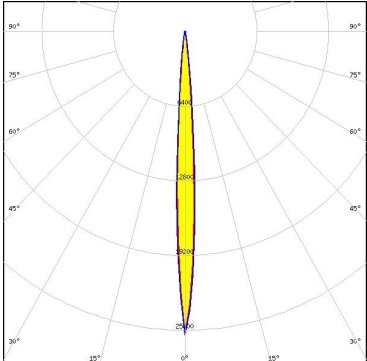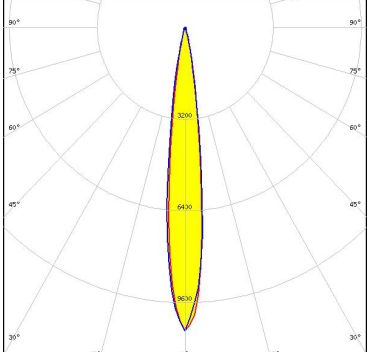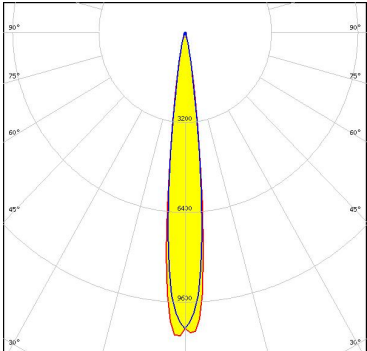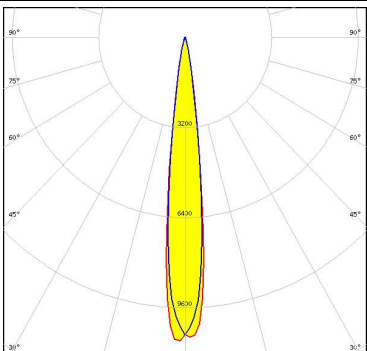
<p><b>OSRAM</b> Opto Semiconductors</p> <p>LED SFH 4714A</p> <p>FWHM / FWTM 7.0° / 14.0°</p> <p>Efficiency 84 %</p> <p>Peak intensity 26 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour IR</p> <p>Required components:</p>	
<p><b>OSRAM</b> Opto Semiconductors</p> <p>LED SFH 4715AS</p> <p>FWHM / FWTM 13.0° / 25.0°</p> <p>Efficiency 88 %</p> <p>LEDs/each optic 1</p> <p>Light colour IR</p> <p>Required components:</p>	
<p><b>OSRAM</b> Opto Semiconductors</p> <p>LED SFH 4715S</p> <p>FWHM / FWTM 13.0° / 24.0°</p> <p>Efficiency 87 %</p> <p>LEDs/each optic 1</p> <p>Light colour IR</p> <p>Required components:</p>	
<p><b>OSRAM</b> Opto Semiconductors</p> <p>LED SFH 4725S</p> <p>FWHM / FWTM 13.0° / 24.0°</p> <p>Efficiency 87 %</p> <p>LEDs/each optic 1</p> <p>Light colour IR</p> <p>Required components:</p>	

#### OPTICAL RESULTS (SIMULATED):

<p><b>OSRAM</b> Opto Semiconductors</p> <p>LED: SFH 4726S            FWHM / FWTM: 9.0° / 17.0°            Efficiency: 84 %            LEDs/each optic: 1            Light colour: IR            Required components:</p>	
<p><b>SEOUL SEMICONDUCTOR</b></p> <p>LED: Z8Y22            FWHM / FWTM: 15.0° / 29.0°            Efficiency: 80 %            Peak intensity: 5.4 cd/lm            LEDs/each optic: 1            Light colour: White            Required components:</p>	

### GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

### MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

### PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

#### LEDiL Oy

Joensuunkatu 13  
FI-24240 SALO  
Finland

#### LEDiL Inc.

228 West Page Street  
Suite D  
Sycamore IL 60178  
USA

#### Ledil Optics Technology (Shenzhen) Co., Ltd.

# 405 , Block B  
Casic Motor Building  
Shenzhen 518057  
P.R.CHINA

#### Local sales and technical support

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)

#### Shipping locations

Salo, Finland  
Hong Kong, China

#### Distribution Partners

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)