

Foot element - UM 25/45-FEO 200 - 2959434

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Foot element, is inserted in the profile housing, limit stop with screw. Mounted at right angles to the NS 35/7.5 DIN rail

Your advantages

- UM ...-SES lateral element offers options for labeling with Phoenix Contact marking material
- Fast mounting
- Flexible size and shape
- Inexpensive as a result of reducing the number of separate housing parts
- High degree of mechanical stability by screwing the lateral elements to the profile
- The UMK-BF mounting flange enables modules to be mounted directly on the wall
- Cable fixing by means of UM ...-SEK lateral element (fixed using cable binders, not supplied as standard)



Key Commercial Data

Packing unit	10 pc
Minimum order quantity	10 pc
GTIN	
GTIN	4017918117610

Technical data

General

Housing type	Component housing
Housing material	Polyamide
Color (RAL)	green


Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values


Drawings

Foot element - UM 25/45-FEO 200 - 2959434

Dimensional drawing

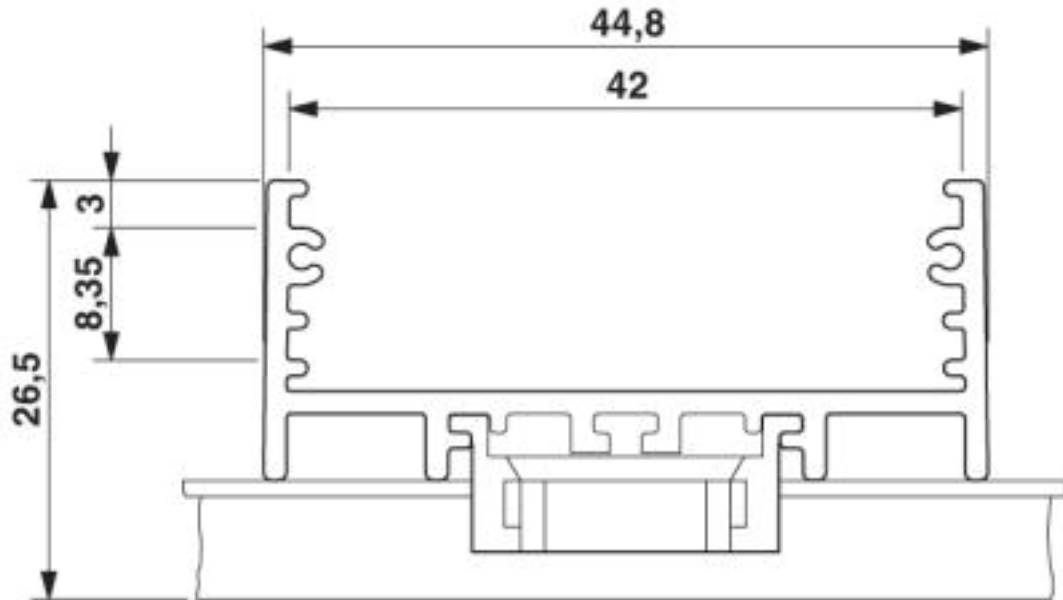

Dimensional drawing

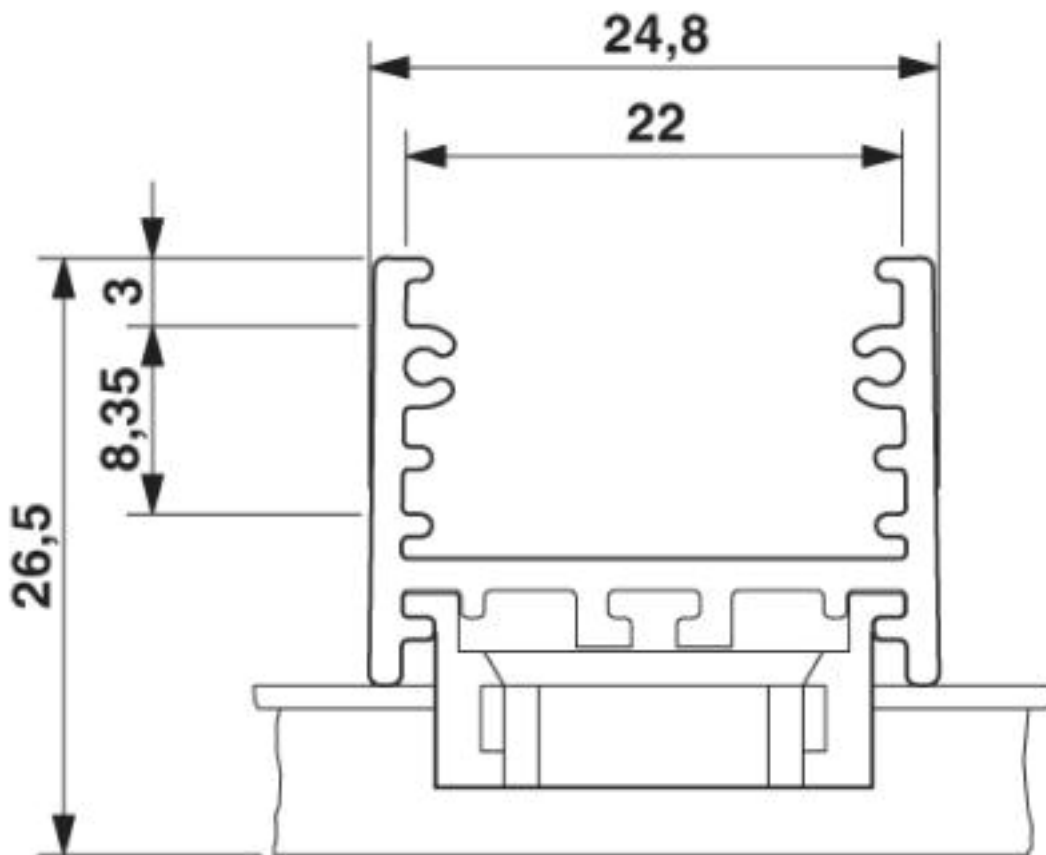

Foot element - UM 25/45-FEO 200 - 2959434

Approvals


Approvals


Approvals

UL Recognized / EAC

Ex Approvals

Approval details

UL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 240868
---------------	---	---	---------------

EAC			B.01742
-----	--	--	---------

Phoenix Contact 2019 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>