

**Ratings**

Voltage: 600 V  
 Temperature: -40~105 °C  
 Flammability: FT2

**Conductor**

Conductor count: 8  
 Gauge: 30 AWG 0.05 mm<sup>2</sup>  
 Material: tinned copper strands  
 Strand size:  $\phi 0.1 \times 7$   
 Resistance at 20 °C: 381  $\Omega$  /km max

**Insulator**

Material: mPPE  
 Color: red, black, white, yellow, blue, green, orange, purple  
 Diameter:  $\phi 0.8 \pm 0.08$  mm  
 Average thickness: 0.23 mm  
 Minimum thickness: 0.18 mm  
 Resistance at 20 °C: 100 M $\Omega$  /km min

**Shield**

Type: foil  
 Material: aluminum mylar  
 Coverage: 100%

**Filler**

Material: cotton rope



**Outer jacket**

Material: mPPE, 85A  
 Color: black  
 Diameter:  $\phi 4.4 \pm 0.15$  mm  
 Average thickness: 0.82 mm  
 Minimum thickness: 0.57 mm

**Wire marking:** E339579 UL AWM STYLE 21509 30 AWG 105°C 600V --- cUL AWM I A 105°C 600V FT2 TENSILITY

**Bend radius**

Minimum: 6 times diameter (26.4 mm)

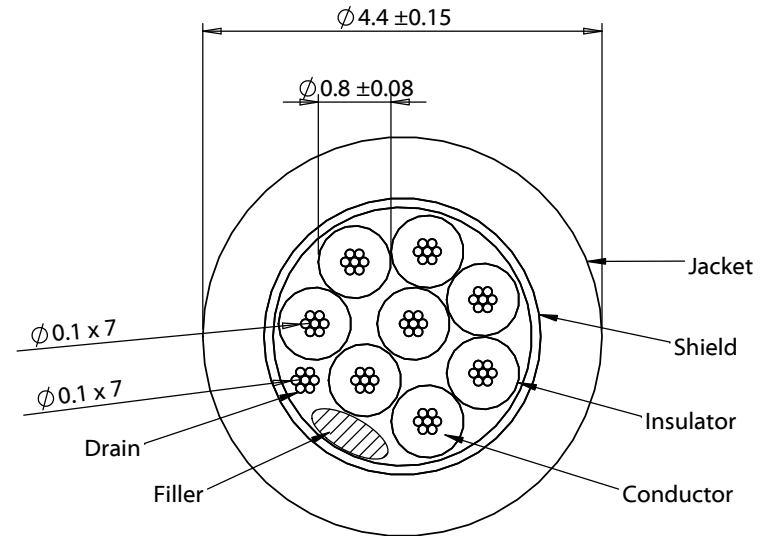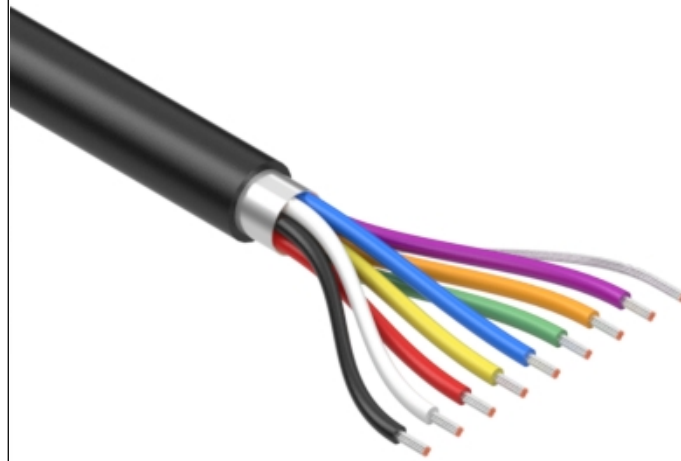

Revision:	Date:	Description:	Prepared:	Notes: RoHS compliant Phthalate and halogen free	<h1 style="margin: 0;">TENSILITY</h1> <p style="margin: 0; font-size: small;">tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>	
A	4/21/2020	Initial release	Verified:			
			Dimensions are in millimeters. Tolerances: X: $\pm 0.5$ mm X.X: $\pm 0.3$ mm X.XX: $\pm 0.05$ mm	Description: Wire, 8C TS, 30 AWG, 21509, 600V, 105C, 4.4 mm, shielded, FT2, mPPE	Size: A	Part number: <b>30-01510</b>
				Scale: 12:1		Sheet 1 of 1

5

4

3

2

1