

т	۵	н т	m	O



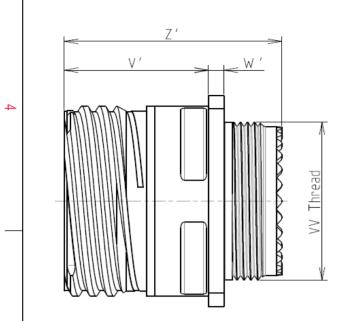



LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 19

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : J = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite			
-Shell Plating	: Olive drab Cadmium			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	-65℃ to +175℃			
-Salt Spray	: 2000 hours			

: 39.7 g ± 10%

8D 0

G

19

J

11

В


F

В

Connector dimension				
Dim	Nominal			
Р	3.25±0.2			
PP	4.93±0.2			
R1	29.36			
R2	26.97			
S	36.5±0.3			
V'	19.5+1.4/-0			
W'	2.1/3.65			
Z'	32 Max			
VV THREAD	M28x1-6g			

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

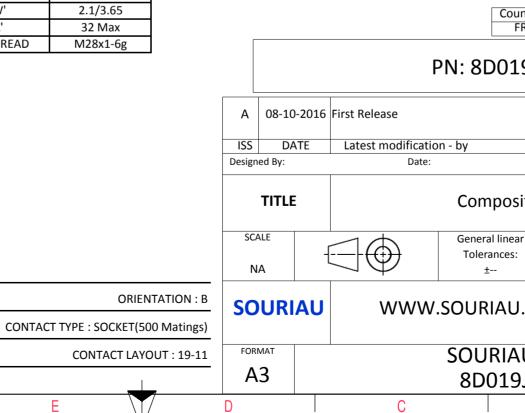

	Ξ		A		
					4
AS EXA	AMPLE				3
s whic er of th ndatio untry FR	non-conformit h does not co he Parties or b n, technical no Jurisd	mply with by a third part			2
				MOD N°	
ar J.CC	Receptacl DM DRG N°	e 8D serio NPRDS / 81 This doc it mus	R DRAWING PROJECT 59 SOURIAU t not be reproduction to be reproduct	perty of ed or	1
	1BB-C			1/2	
	В		А		,

