




TOP VIEW



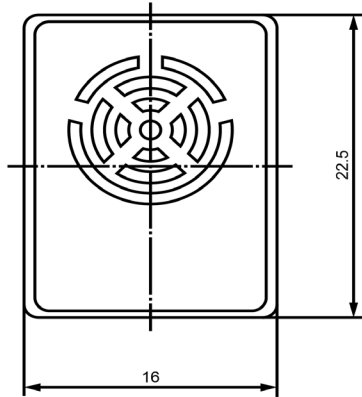

SIDE VIEW

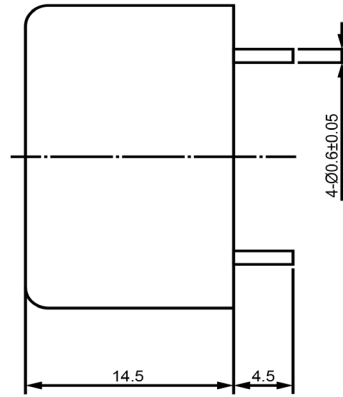

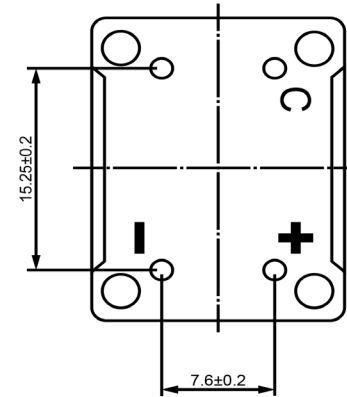BOTTOM VIEW



Specifications			Notes	Revision History												
Description	Value	Unit		Version	Description	Date	Approved									
Technology	Electro-Mechanical		1) All dimensions are in mm unless otherwise noted 2) All parts meet RoHS 	1	Released from Engineering	10/21/2013	J.S									
Resonant Frequency	400	(Hz)														
Rated Voltage	12	(V)														
SPL @ 10cm	81	(dBA)														
Tone	Single															
Mount Type	Thru Hole															
Voltage Range	9 ~ 15	(V)														
Max Rated Current	25	(mA)														
Housing Material	NORYL															
Operating Temperature	-30 ~ +70	°C														
Storage Temperature	-40 ~ +85	°C														
Weight	10	(g)														
				Drawn by A.B.		Date 10/21/2013		Checked by C.E.		Date 10/21/2013		Approved by J.S		Date 10/21/2013		
				Electro-Mechanical Indicator				IE220412-1								