
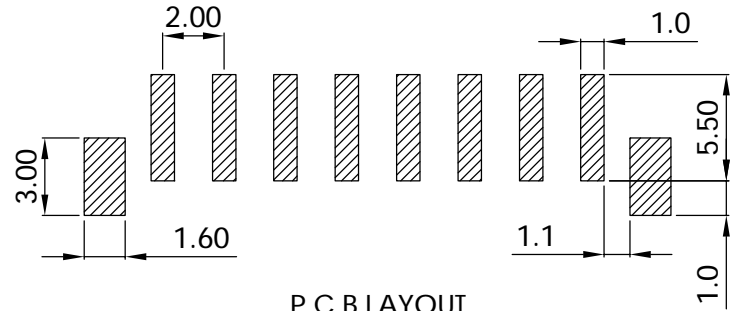
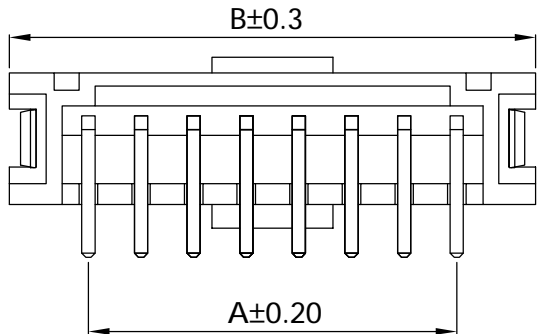
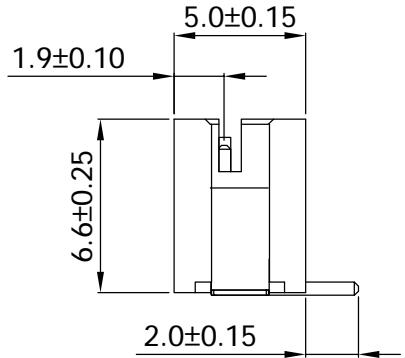
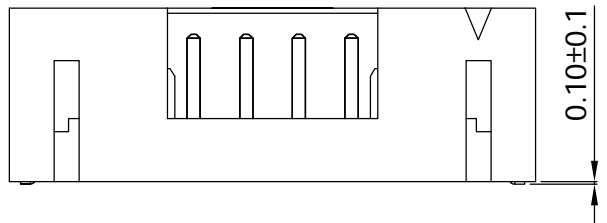


環保物料專用
RoHS compliant

SPECIFICATIONS

Current Rating :2A AC,DC
 Voltage rating :100V AC,DC
 Temperature range :−25°C~+85°C
 Contact resistance :20mΩMax
 Insulation resistance :1000MΩMin
 Withstanding voltage :800 V AC/minute
 Pin Material :Brass
 Finished :Tin-plated
 Housing Mateial :Nylon-6T,UL94 V -0
 Color :Black

Circuits	Dimension mm	
	A	B
02	2.00	8.00
03	4.00	10.00
04	6.00	12.00
05	8.00	14.00
06	10.00	16.00
07	12.00	18.00
08	14.00	20.00
09	16.00	22.00
10	18.00	24.00
11	20.00	26.00
12	22.00	28.00
13	24.00	30.00
14	26.00	32.00
15	28.00	34.00
16	30.00	36.00

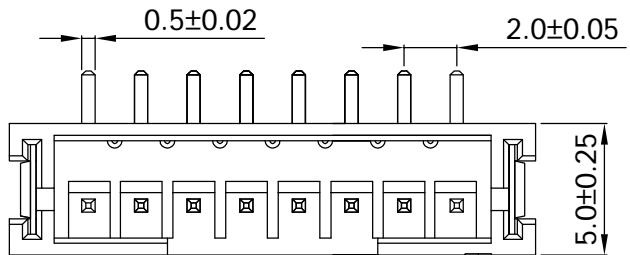

KAWEEI TECHNOLOGY

A4 SCALE(比例): 1:XX

THIRD ANGLE PROJECTION

DESCRIPTION(內容):
2.0mm Wafer 180° SMT

PART NO:
(料 號) CCP-W20-XX-BK-SMT-R-A

DWG NO(圖號): KWRD190816-008

DRAWN(製圖):
Tom Liu

CHECKED(確認):
Jack Wu

APPROVAL(核准):
Kane He

GENERAL TOLERANCE		REV: A/1	REV	DESCRIPTION	DATE
LINEAR	ANGLES				
X.: ±0.30	X°: ±5.0°	UNIT: mm	1	ORIGINAL	Aug-16-2019
X.X: ±0.20	X.X°: ±3.0°		2		
X.XX: ±0.15	X.XX°: ±2.0°	SHEET: 1/1	3		
X.XXX: ±0.10	X.XXX°: ±1.0°		4		